


# IPH 4

Standard design

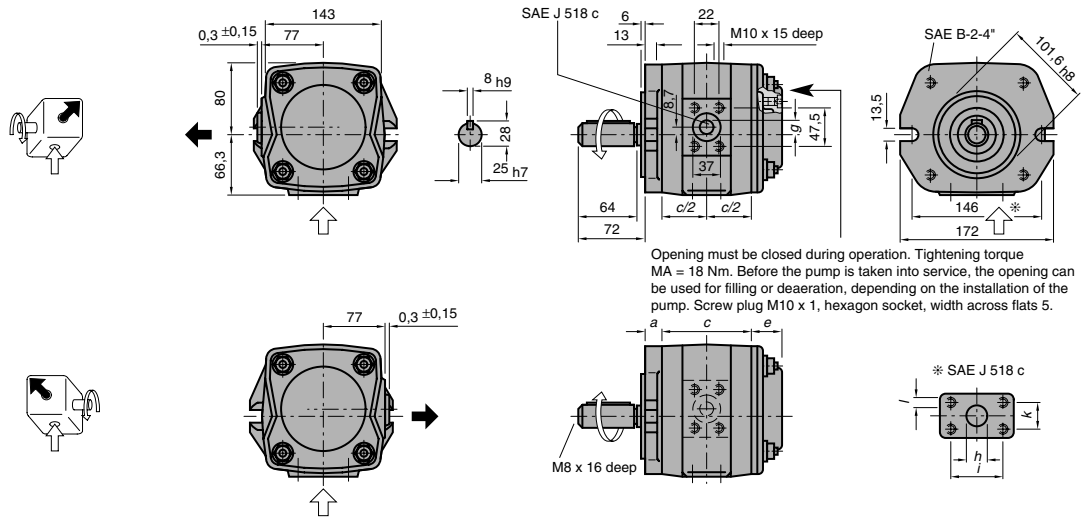

Opening must be closed during operation. Tightening torque MA = 18 Nm. Before the pump is taken into service, the opening can be used for filling or deaeration, depending on the installation of the pump. Screw plug M10 x 1, hexagon socket, width across flats 5.

Weight and dimensions										
	a	b	c	e	g	h	i	k	l	kg
IPH 4 – 20	20	50	102	36	19	32	58.7	30.2	M 10 x 15 deep	13.5
IPH 4 – 25	20	50	108	36	21	32	58.7	30.2	M 10 x 15 deep	14.2
IPH 4 – 32	20	50	116	36	24	32	58.7	30.2	M 10 x 15 deep	15.0

SAE flange no.	
↑	↓
11	13
11	13
11	13

Performance data as per page 5  
For SAE suction and discharge flanges see page 22

Type	Size	Suction port radial Sense of rotation	Mounting flange SAE-2-hole flange	Alternative: SAE-4-hole flange	Shaft end		
IPH 4	20	1	<p>Dimensions as above</p>		<p>Dimensions as above</p>		
	25	6				0 1	0 0
	32	6				0 0	1 1
					<p>Involute splines ANSI B92 1a 13 T 16/32 DP 30°</p>		
					<p>Involute splines ANSI B92 1a 13 T 16/32 DP 30°</p>		
					<p>Involute splines ANSI B92 1a 13 T 16/32 DP 30°</p>		

Ordering-code