


IPC 5

Standard design

www.khadamathydraulic.com
 Tell: 021-55882749
 Tell: 021-33488178
 Fax: 021-33488105

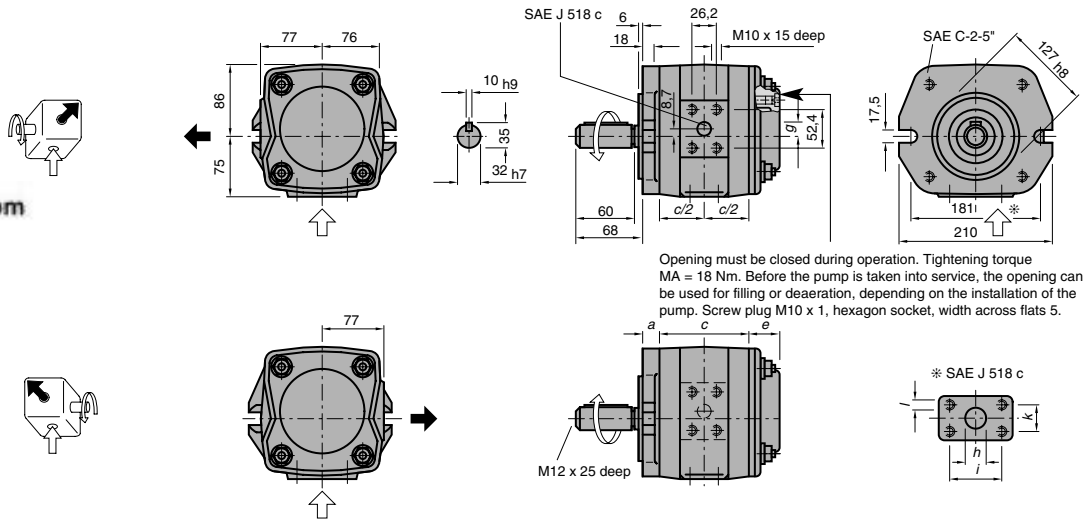

Opening must be closed during operation. Tightening torque MA = 18 Nm. Before the pump is taken into service, the opening can be used for filling or deaeration, depending on the installation of the pump. Screw plug M10 x 1, hexagon socket, width across flats 5.

Weight and dimensions										
	a	b	c	e	g	h	i	k	l	kg
IPC 5 – 40	20	53	125	36	19	35	70	36	M 12 x 20	16.3
IPC 5 – 50	20	53	132	36	21	40	70	36	M 12 x 20	17.4
IPC 5 – 64	20	53	143	36	23	40	70	36	M 12 x 20	18.7

SAE flange no.	
↑	↓
12	30
12	30
12	30

Performance data as per page 5
 For SAE suction and discharge flanges see page 22

Type	Size	Sense of rotation	Mounting flange	Shaft end
IPC 5	40	 1	SAE-2-hole flange Dimensions as above 0 1	Dimensions as above 0 1
	50		Alternatives: SAE-2-hole flange for splined shaft Direct mounting on equipment with SAE connection. 7 0	Involute splines ANSI B92 1a 14 T 12/24 DP 30° 7 0
	64			
			VDMA 24560 DIN ISO 3019/2 4-hole flange 5 1	 5 1

Ordering-code