



Technical Information

Orbital Motors

OMS, OMT and OMV



Revision history*Table of revisions*

Date	Changed	Rev
February 2016	Corrected Hardening specification for OM55, OMT5, OMV5	0601
November 2014	Converted to Dantoss layout - DITA-CMS	FH
December 2013	Table updated	EL
June 2013	Drawing corrected	ER
April 2013	Drawing corrected	EL
January 2013	Correct drawing	EL
November 2012	Planetary Gears deleted	EH
July 2012	Typeo in 'Major dial'	EG
November 2010	Dimensions changed	EE
November 2009	Conversion, and layout adjusted	ED

Contents

Orbital motors

Characteristic, features and application areas of Orbital Motors	5
Characteristic features of Danfoss Orbital Motors	5
Technical features of Danfoss Orbital Motor	5
The Danfoss Orbital Motors are used in the following application areas	6
Survey of literature with technical data on Danfoss Orbital Motors	6

OMS, OMT and OMV

Speed, torque and output	7
--------------------------	---

OMS

Versions	9
Features	9
Code numbers	10
Ordering	10
Technical data	11
Maximum permissible shaft seal pressure	12
Motor with check valves and without use of drain connection	12
Maximum return pressure	12
Pressure drop in motor	13
Oil flow in drain line	13
Direction of shaft rotation	13
Permissible shaft loads for OMS	13
Function diagrams	18
Function diagram use	22
Shaft version	23
Port thread versions	26
Dimensions	26
Standard flange—European version	27
Standard flange—US version	29
Special flange—European version	31
A-2 flange—US version	32
Magneto flange—US version	34
SAE-B flange—US version	36
Wheel—European version	38
Wheel—US version	40
Short—European version	42
OMSS	43
Installing the OMSS	43
Attached component dimensions	43
Internal spline data for the component to be attached	43
Motor or attached component drain connection	44

OMT

Versions	46
Features	46
Code numbers	46
Ordering	47
Technical data	47
Maximum permissible shaft seal pressure	47
Motor with check valves and without use of drain connection	47
Motor with check valves and with drain connection	47
Maximum return pressure	48
OMT, OMTW, OMES, OMT FX, OMT FL and OMT FH	48
Pressure drop in motor	50
Oil flow in drain line	50
Direction of shaft rotation	51
Permissible shaft loads for OMT	51
Function diagrams	54
Function diagram use	56
Shaft version	57

Contents

Port thread versions	60
Dimensions	61
Standard flange—European version	61
Standard flange—US version	63
Wheel—European version	65
Wheel—US version	67
Brake wheel—European version	69
Brake standard—European version	71
Short—European version	72
OMTS	73
Installation	73
Attached component dimensions	73
Attached component internal splines	74
Motor or attached component drain connection	75
OMV	
Versions	75
Features	76
Code numbers	76
Ordering	77
Technical data	77
Technical data for OMV, OMV/W and OMVS	77
Maximum permissible shaft seal pressure	77
Motor with check valves and without use of drain connection	77
Maximum return pressure	79
Pressure drop in motor	78
Oil flow in drain line	79
Direction of shaft rotation	79
Permissible shaft loads for OMV	79
Function diagrams	81
Function diagram use	84
Shaft version	85
Port thread versions	88
Dimensions	89
Standard flange—European version	89
Standard flange—US version	91
SAE-C flange—US version	93
Wheel—European version	95
Wheel—US version	97
Short—European version	98
OMVS	99
Installation	99
Attached component dimensions	99
Attached component internal splines	100
Motor or attached component drain connection	101
Weight of motors	
Code numbers and weight	102

Orbital motors**Characteristic, features and application areas of Orbital Motors**

Danfoss is a world leader within production of low speed orbital motors with high torque. We can offer more than 3,000 different orbital motors, categorised in types, variants and sizes (including different shaft versions).

The motors vary in size (rated displacement) from 8 cm^3 (0.50 in^3) to 800 cm^3 (46.9 in^3) per revolution.

Speeds range up to approximate $2,500 \text{ min}^{-1}$ (rpm) for the smallest type and up to approximate 600 min^{-1} (rpm) for the largest type.

Maximum operating torques vary from $13 \text{ N}\cdot\text{m}$ [$115 \text{ lb}\cdot\text{in}$] to $2,700 \text{ N}\cdot\text{m}$ [$24,000 \text{ lb}\cdot\text{in}$] (peak) and maximum outputs are from 2.0 kW [2.7 hp] to 70 kW [95 hp].

Characteristic features of Danfoss Orbital Motors

- Smooth running over the entire speed range
- Constant operating torque over a wide speed range
- High starting torque
- High return pressure without the use of drain line (High pressure shaft seal)
- High efficiency
- Long life under extreme operating conditions
- Robust and compact design
- High radial and axial bearing capacity
- For applications in both open and closed loop hydraulic systems
- Suitable for a wide variety of hydraulics fluids

Technical features of Danfoss Orbital Motor

The programme is characterised by technical features appealing to a large number of applications and a part of the programme is characterised by motors that can be adapted to a given application. Adaptions comprise the following variants among others:

Orbital motors

- Motors with corrosion resistant parts
- Wheel motors with recessed mounting flange
- OMP, OMR-motors with needle bearing
- OMR motor in low leakage version
- OMR motors in a super low leakage version
- Short motors without bearings
- Ultra short motors
- Motors with integrated positive holding brake
- Motors with integrated negative holding brake
- Motors with integrated flushing valve
- Motors with speed sensor
- Motors with tacho connection
- All motors are available with black finish paint

The Danfoss Orbital Motors are used in the following application areas:

- Construction equipment
- Agricultural equipment
- Material handling & Lifting equipment
- Forestry equipment
- Lawn and turf equipment
- Special purpose
- Machine tools and stationary equipment
- Marine equipment

Survey of literature with technical data on Danfoss Orbital Motors


Detailed data on all Danfoss Orbital Motors can be found in our motor catalogue, which is divided into more individual subcatalogues.

- General information on Danfoss Orbital Motors: function, use, selection of orbital motor, hydraulic systems, etc.
- Technical data on small motors: OML and OMM
- Technical data on medium-sized motors: OMP, OMR, OMH
- Technical data on medium-sized motors: DH and DS
- Technical data on medium-sized motors: OMEW
- Technical data on medium-sized motors: VMP
- Technical data on medium-sized motors: VMR
- Technical data on large motors: OMS, OMT and OMV
- Technical data on large motors: TMK
- Technical data on large motors: TMT
- Technical data on large motors: TMTHW
- Technical data on large motors: TMVW

A general survey brochure on Danfoss Orbital Motors gives a quick motor reference based on power, torque, speed and capabilities.

OMS, OMT and OMV

Speed, torque and output

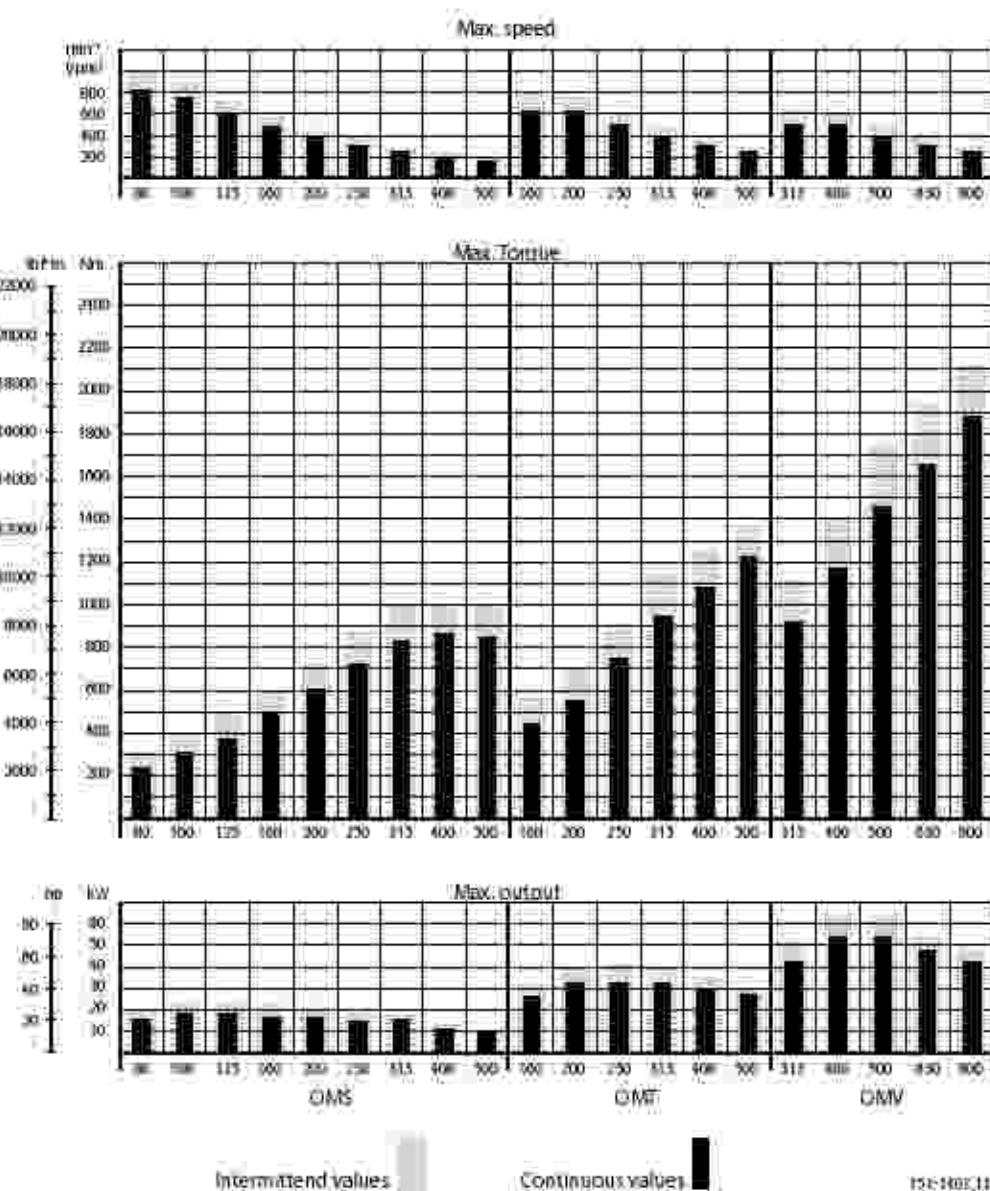

The bar diagrams above are useful for a quick selection of relevant motor size for the application. The final motor size can be determined by using the function diagram for each motor size.

- [OMS Function diagrams](#) on page 16
- [OMT Function diagrams](#) on page 54

OMS, OMT and OMV

- [OMV Function diagram](#) is on page 81

The function diagrams are based on actual tests on a representative number of motors from our production. The diagrams apply to a return pressure between 5 and 10 bar [75 and 150 psi] when using mineral based hydraulic oil with a viscosity of 35 mm²/s [165 SUS] and a temperature of 50°C [120°F]. For further explanation concerning how to read and use the function diagrams, please consult the paragraph 'Selection of motor size' in the technical information 'General Orbital motors' 520L0232.

OMS**Versions****OMS Versions**

Mounting flange	Shaft	Port size	European version	US version	Drain connection	Check valve	Main type designation
Standard flange	Cyl. 32 mm	G 1/2	X		Yes	Yes	OMS
	Cyl. 1.25 in	7/8-14 UNF		X	Yes	Yes	OMS
	Splined 1.25 in	G 1/2	X		Yes	Yes	OMS
		7/8-14 UNF		X	Yes	Yes	OMS
	Tapered 35 mm	G 1/2	X		Yes	Yes	OMS
	Tapered 1.25 in	7/8-14 UNF		X	Yes	Yes	OMS
P.t.o.	G 1/2	X			Yes	Yes	OMS
Special flange	Splined 1.25 in	G 1/2	X		Yes	Yes	OMS
A-E flange	Cyl. 1 in	7/8-14 UNF		X	Yes	Yes	OMS
	Cyl. 1.25 in	7/8-14 UNF		X	Yes	Yes	OMS
	Splined 1 in	7/8-14 UNF		X	Yes	Yes	OMS
	Splined 1.25 in	7/8-14 UNF		X	Yes	Yes	OMS
	Tapered 1.25 in	7/8-14 UNF		X	Yes	Yes	OMS
Magnetic flange	Cyl. 1 in	7/8-14 UNF		X	Yes	Yes	OMS
	Cyl. 1.25 in	7/8-14 UNF		X	Yes	Yes	OMS
	Splined 1 in	7/8-14 UNF		X	Yes	Yes	OMS
	Splined 1.25 in	7/8-14 UNF		X	Yes	Yes	OMS
SAE B flange	Splined 1.25 in	7/8-14 UNF		X	Yes	Yes	OMS
	Splined 0.875 in	7/8-14 UNF		X	Yes	Yes	OMS
Wheel	Cyl. 32 mm	G 1/2	X		Yes	Yes	OMSW
	Cyl. 1.25 in	7/8-14 UNF		X	Yes	Yes	OMSW
	Tapered 35 mm	G 1/2	X		Yes	Yes	OMSW
	Tapered 1.25 in	7/8-14 UNF		X	Yes	Yes	OMSW
Short	No output shaft	G 1/2	X		Yes	Yes	OMSW

Features

Features available to option:

- Speed sensor
- Motor with tacho connection
- High pressure shaft seal
- Viton shaft seal
- Painted
- Ultra short
- Motor with drum brake

OMS

Code numbers

OMS code numbers

Code Numbers	Displacement [cm³]									
	80	100	125	160	200	250	315	400	500	
151F	0500	0501	0502	0503	0504	0505	0506	0605	-	
151F	2200	2201	2202	2203	2204	2205	2206	2261	2268	
151F	0507	0508	0509	0510	0511	0512	0513	-	-	
151F	2207	2208	2209	2210	2211	2212	2213	2262	2269	
151F	0514	0515	0516	0517	0518	0519	0520	-	-	
151F	2214	2215	2216	2217	2218	2219	2220	2264	2270	
151F	0560	0561	0562	0563	0564	0565	0566	-	-	
151F	0542	0543	0544	0545	0546	0547	0548	-	-	
151F	2300	2301	2302	2303	2304	2305	2306	2307	2345	
151F	2316	2317	2318	2319	2320	2321	2322	2323	2342	
151F	2308	2309	2310	2311	2312	2313	2314	2315	2346	
151F	2324	2325	2326	2327	2328	2329	2330	2331	2348	
151F	2332	2333	2334	2335	2336	2337	2338	2339	2349	
151F	2377	2378	2379	2380	2381	2382	2383	2384	2385	
151F	2368	2369	2370	2371	2372	2373	2374	2375	2376	
151F	2359	2360	2361	2362	2363	2364	2365	2366	2367	
151F	2350	2351	2352	2353	2354	2355	2356	2357	2358	
151F	2395	2396	2397	2398	2399	2400	2401	2402	2403	
151F	2413	2414	2415	2416	2417	-	-	-	-	
151F	0521	0522	0523	0524	0525	0526	0527	0610	-	
151F	2235	2236	2237	2238	2239	2240	2241	2265	2266	
151F	0528	0529	0530	0531	0532	0533	0534	0609	-	
151F	2242	2243	2244	2245	2246	2247	2248	2261	2262	
151F	0535	0536	0537	0538	0539	0540	0541	0608	-	

Ordering

Add the four digit prefix "151F" to the four digit numbers from the chart for complete code number.

Example:

151F0504 for an OMS 200 with standard flange cyl. 32 mm shaft and port size G 1/2

Orders will not be accepted without the four digit prefix.

OMS

Technical data

Type		OMS OMSW OMSS	OMS OMSW OMSS	OMS OMSW OMSS	OMS OMSW OMSS	OMS OMSW OMSS	OMS OMSW OMSS	OMS OMSW OMSS	OMS OMSW OMSS	
Motor size		90	100	125	160	200	250	315	400	500
Geometric displacement	cm ³ [in ³]	80.5 [4.91]	100.0 [6.10]	125.7 [7.67]	159.7 [9.75]	200.0 [12.20]	250.0 [15.26]	314.9 [19.22]	393.0 [23.98]	488.0 [29.78]
Max. speed	min ⁻¹ [rpm]	cont. int. ¹⁾	810 1000	750 900	600 720	470 560	375 450	300 360	240 285	190 230
Max. torque	Nm [lbft/in]	cont. int. ¹⁾	240 310 [2120] [2240]	305 390 [2200] [2450]	375 490 [3220] [4340]	490 600 [4040] [5310]	610 720 [5400] [6370]	720 820 [6370] [7700]	825 1000 [7800] [8850]	865 990 [7660] [8760]
Max. output	kW [hp]	cont. int. ¹⁾	15.5 19.5 [20.8] [26.2]	18.0 22.5 [24.1] [30.2]	18.0 22.5 [23.1] [30.8]	16.5 22.0 [22.1] [29.5]	16.5 22.0 [22.1] [29.5]	14.5 18.0 [19.4] [24.1]	15.0 17.0 [20.1] [22.8]	11.0 12.5 [14.8] [16.8]
Max. pressure drop	bar [psi]	cont. int. ¹⁾ peak ²⁾	210 275 295 [3050] [3990] [4280]	210 275 295 [3050] [3990] [4280]	210 275 295 [3050] [3990] [4280]	210 260 280 [3050] [3770] [4060]	210 250 270 [3050] [3630] [3920]	200 240 260 [2900] [3480] [3770]	200 240 260 [2320] [2760] [3050]	160 190 210 [1740] [2030] [2320]
Max. oil flow	l/min [USgal/min]	cont. int. ¹⁾	45 80 [17.2] [21.1]	75 90 [19.8] [23.8]						
Max. starting pressure with unloaded motor	bar [psi]		12 180 [175] [1590]	10 230 [145] [2040]	10 290 [145] [2570]	8 370 [115] [3220]	8 470 [115] [4160]	8 560 [115] [4960]	8 710 [115] [6280]	8 710 [115] [6640]
Min. starting torque	at max. press. drop point Nm [lbft/in]	at max. press. drop point Nm [lbft/in]	180 235 [1590] [2090]	230 380 [2040] [2660]	290 460 [2570] [3360]	370 560 [3220] [4670]	470 760 [4160] [6200]	560 850 [4960] [7520]	710 840 [6280] [7430]	660 770 [6620] [6820]

Type			Max. inlet pressure	Max. return pressure with drain line
OMS OMSW OMSS	bar [psi]	cont.	230 [3340]	140 [2030]
	bar [psi]	int. ¹⁾	295 [4280]	175 [2540]
	bar [psi]	peak ²⁾	300 [4350]	210 [3050]

		Splined 1 in	Cyl 1 in	Splined 0.875 in
* Max torque for that type	Nm [lbft/in]	cont. int. ¹⁾	360 [3198] 450 [3980]	300 [2660] 410 [3630]
				200 [1770] 200 [1770]

¹⁾ Intermittent operation; the permissible values may occur for max. 10% of every minute.²⁾ Peak load; the permissible values may occur for max. 1% of every minute.


For max. permissible combination of flow and pressure, see function diagram for actual motor.

OMS

Maximum permissible shaft seal pressure:

Motor with check valves and without use of drain connection

The pressure on the shaft seal never exceeds the pressure in the return line.




(111-329.10)

Maximum return pressure:


The shaft seal pressure equals the pressure on the drain line.

Maximum return pressure without drain line or maximum pressure in the drain line:

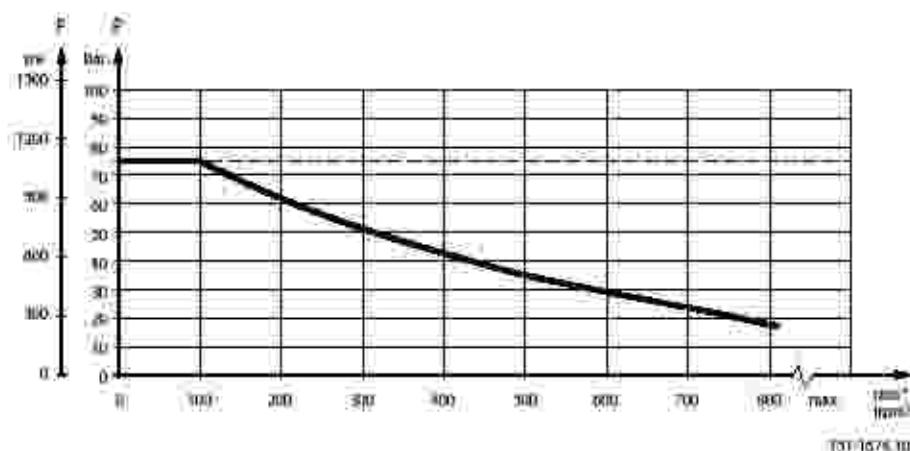

----=intermittent operation: the permissible values may occur for max. 10% of every minute.

—=continuous operation

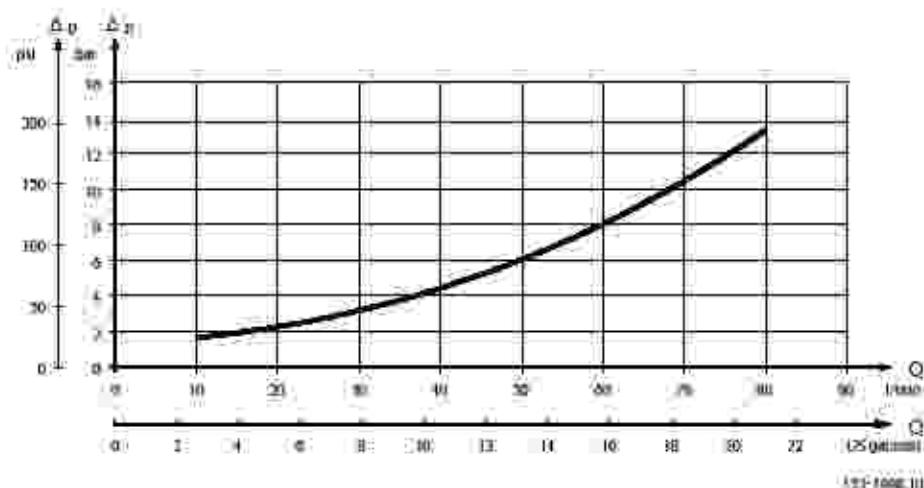
OMS**Pressure drop in motor**

The curve applies to an unloaded motor shaft and an oil viscosity of 35 mm²/s [165 SUS].

Oil flow in drain line

Maximum oil flow in the drain line at a return pressure less than 5–10 bar [73–150 psi]

Pressure drop bar [psi]	Viscosity mm ² /s [SUS]	Oil flow in drain line l/min [US gal/min]
140 [2030]	20 [100]	1.5 [0.40]
	35 [165]	1.0 [0.26]
210 [3050]	20 [100]	3.0 [0.79]
	35 [165]	2.0 [0.53]

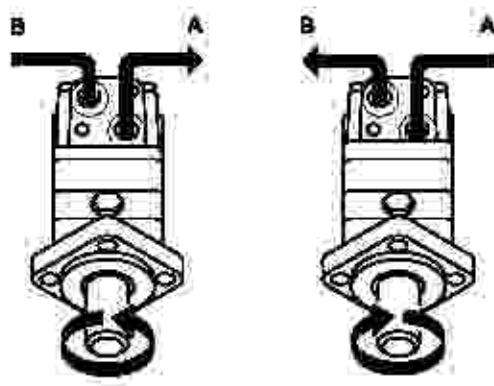Direction of shaft rotation

181-86310

Permissible shaft loads for OMS**Mounting flange:**


Standard = A-2 – Magrieto = SAE B

OMS

Shaft:

Cyl. 32 mm - Cyl. 1.25 in - Splined 1.25 in.


Tapered 35 mm - Tapered 1.25 in - P.t.o.

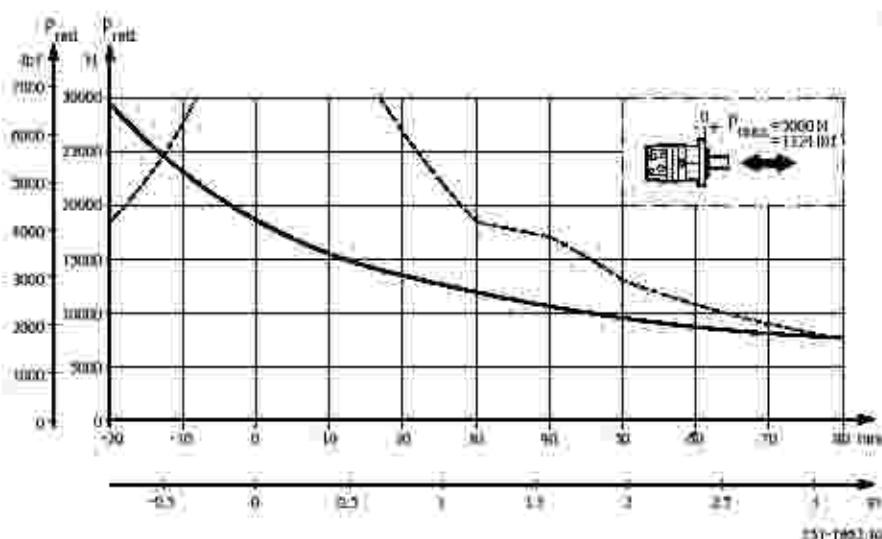**Mounting flange:**

Wheel

Shaft:

All shaft types

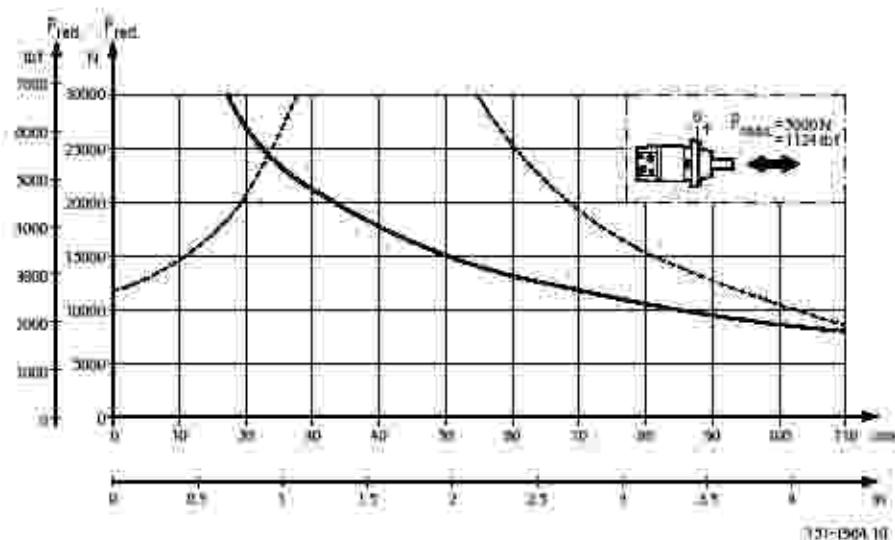

The output shaft runs in tapered roller bearings that permit high axial and radial forces.

The permissible radial load on the shaft is shown for an axial load of 0 N as a function of the distance from the mounting flange to the point of load application.

OMS

The curve is based on B10 bearing life (2000 hours or 12,000,000 shaft revolutions at 100 min⁻¹) at rated output torque, when mineral-based hydraulic oil with a sufficient content of anti-wear additives, is used. For 3,000,000 shaft revolutions or 500 hours – increase these shaft loads with 52%.

The dash curve shows maximum radial shaft load. Any shaft load exceeding the values shown in the curve will involve a risk of breakage.


Bearing life calculations can be made using the explanation and formula provided in the chapter "Bearing dimensioning" in the technical information "General Orbital motors" 520L0232.

Mounting flange:

Special

Shaft:


Splined 1.25 in.

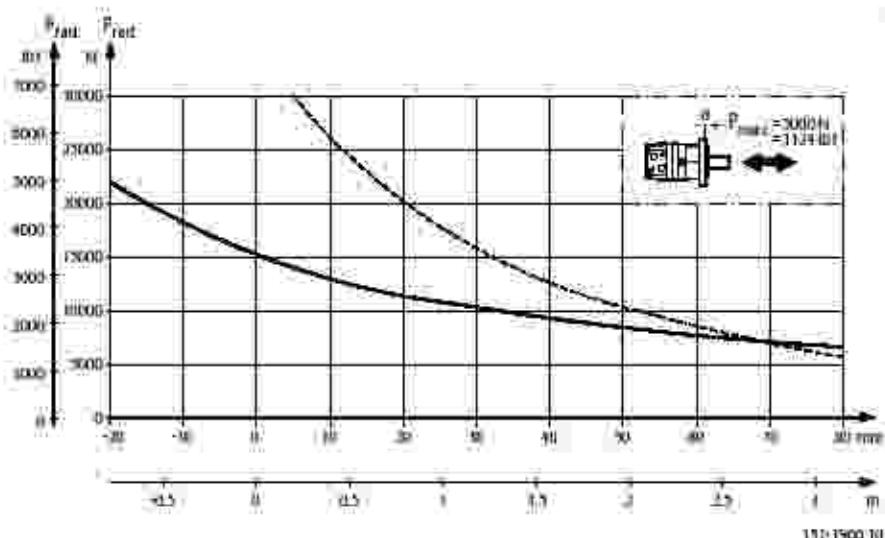***Mounting flange:***

A-2 – Magneto.

Shaft:

Cyl. 1 in – Splined 1 in

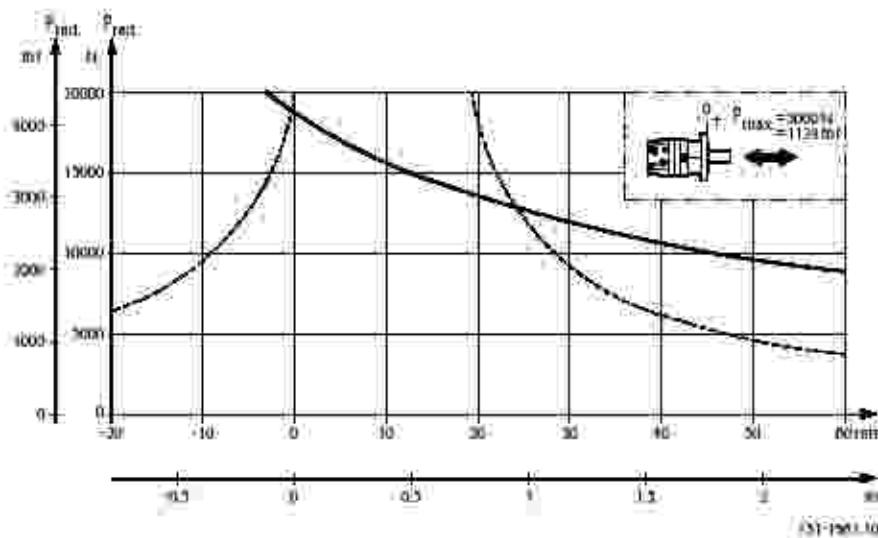OMS

The output shaft runs in tapered roller bearings that permit high axial and radial forces.

The permissible radial load on the shaft is shown for an axial load of 0 N as a function of the distance from the mounting flange to the point of load application.

The curve is based on 510 bearing life (2000 hours or 12,000,000 shaft revolutions at 100 min^{-1}) at rated output torque, when mineral-based hydraulic oil with a sufficient content of anti-wear additives, is used.

For 3,000,000 shaft revolutions or 500 hours – increase these shaft loads with 52%.

The dash curve shows max. radial shaft load. Any shaft load exceeding the values shown in the curve will involve a risk of breakage.

Bearing life calculations can be made using the explanation and formula provided in the chapter "Bearing dimensioning" in the technical information "General Orbital motors" 520L0232.


Mounting flange:

SAE B

Shaft:

Splined 0.875 in.

OMS

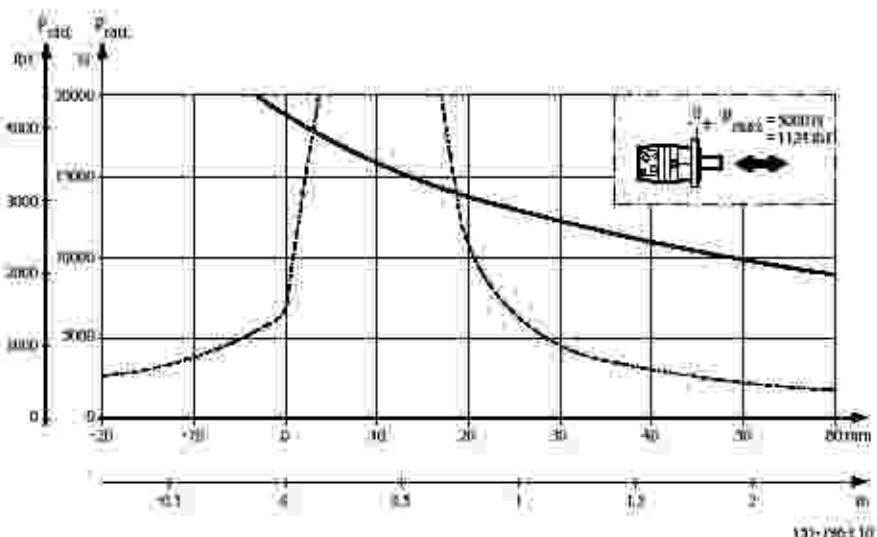



The output shaft units in tapered roller bearings that permit high axial and radial forces.

The permissible radial load on the shaft is shown for an axial load of 0 N as a function of the distance from the mounting flange to the point of load application.

The curve is based on 810 bearing life (2000 hours or 12,000,000 shaft revolutions at 100 min⁻¹) at rated output torque. When mineral-based hydraulic oil with a sufficient content of antiwear additives, is used. For 3,000,000 shaft revolutions or 500 hours – increase these shaft loads with 52%.


The dash curve shows max. radial shaft load. Any shaft load exceeding the values shown in the curve will involve a risk of breakage.

Bearing life calculations can be made using the explanation and formula provided in the chapter "Bearing dimensioning" in the technical information "General Orbital motors" 520L0232.

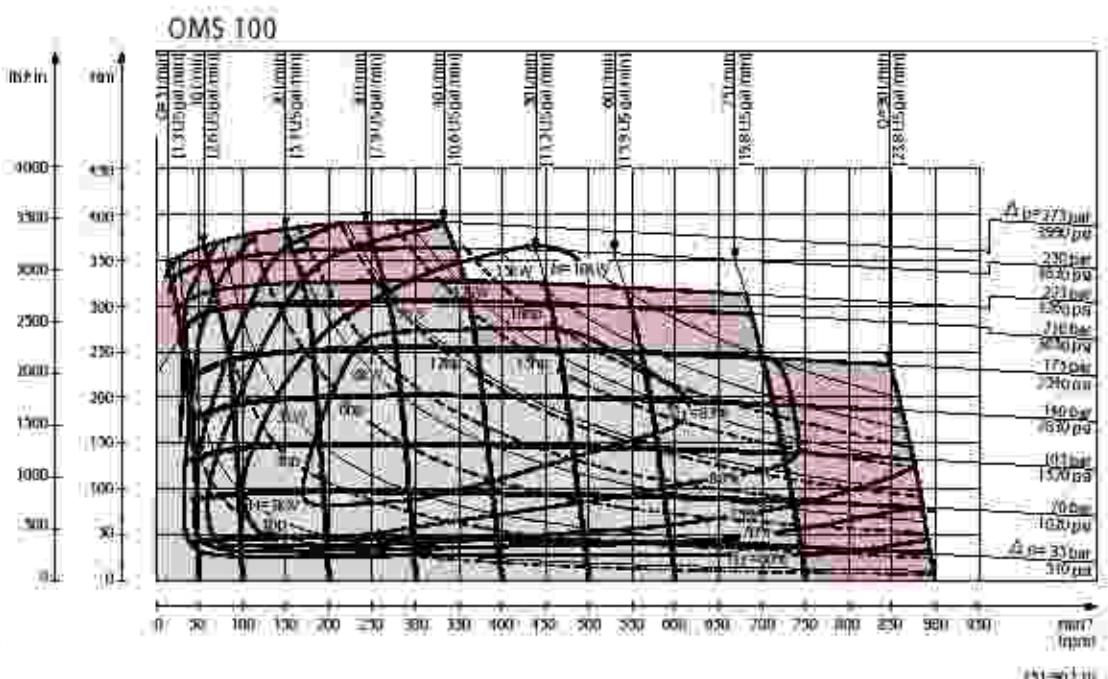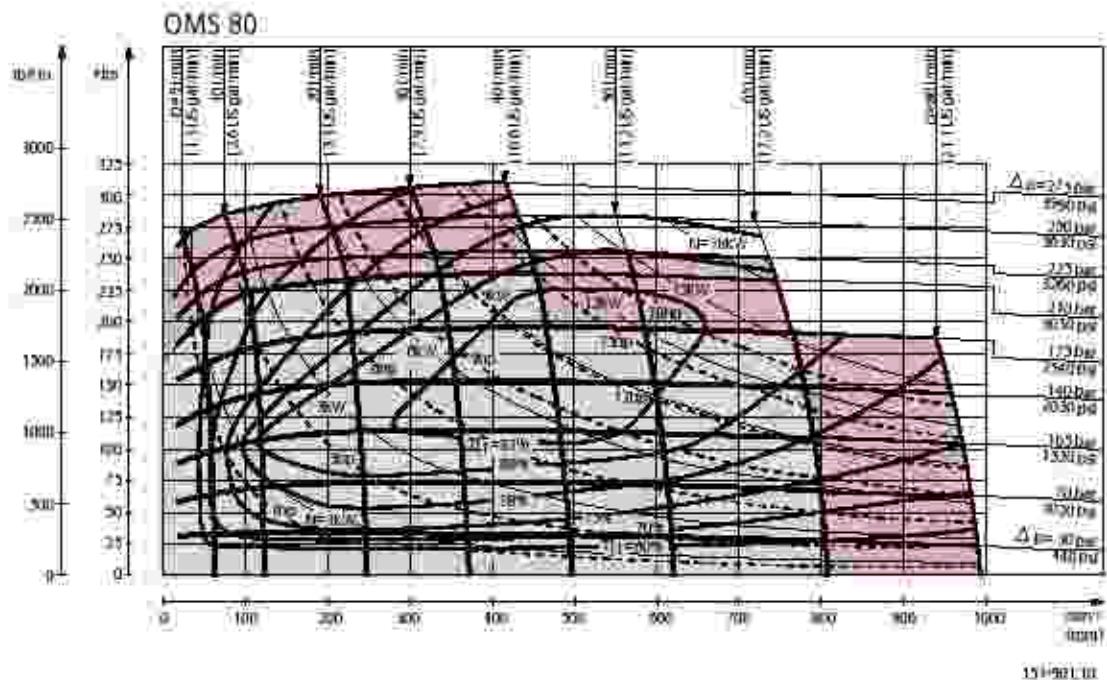
OMS**Function diagrams****Continuous range****Intermittent range (maximum 10% operation every minute)**

OMS



OMS 125

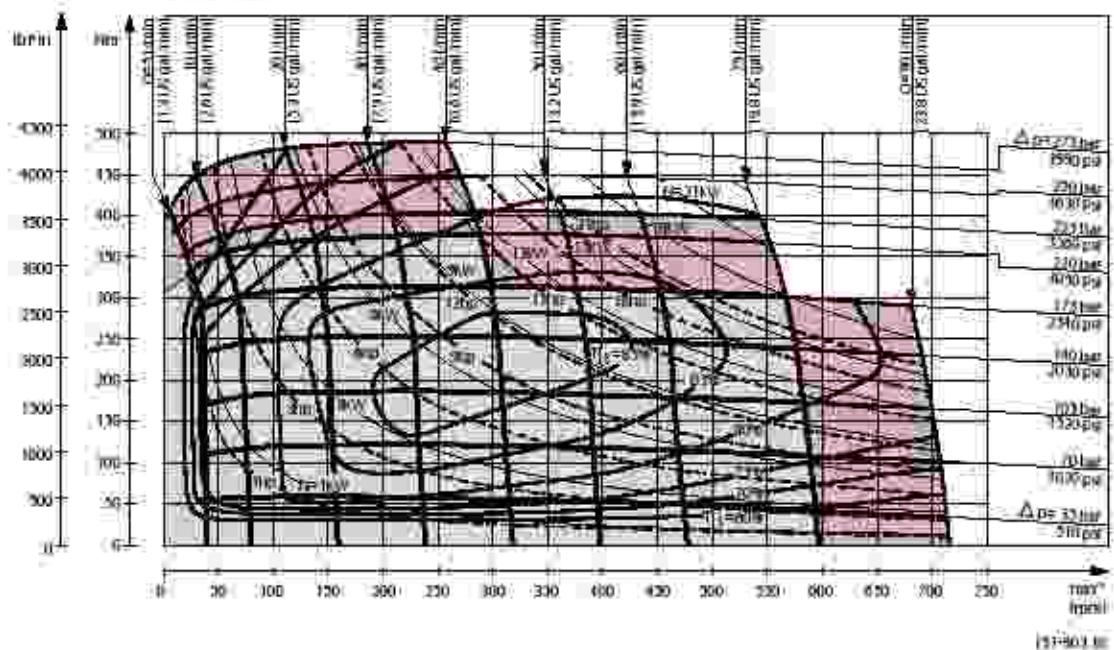

OMS 160

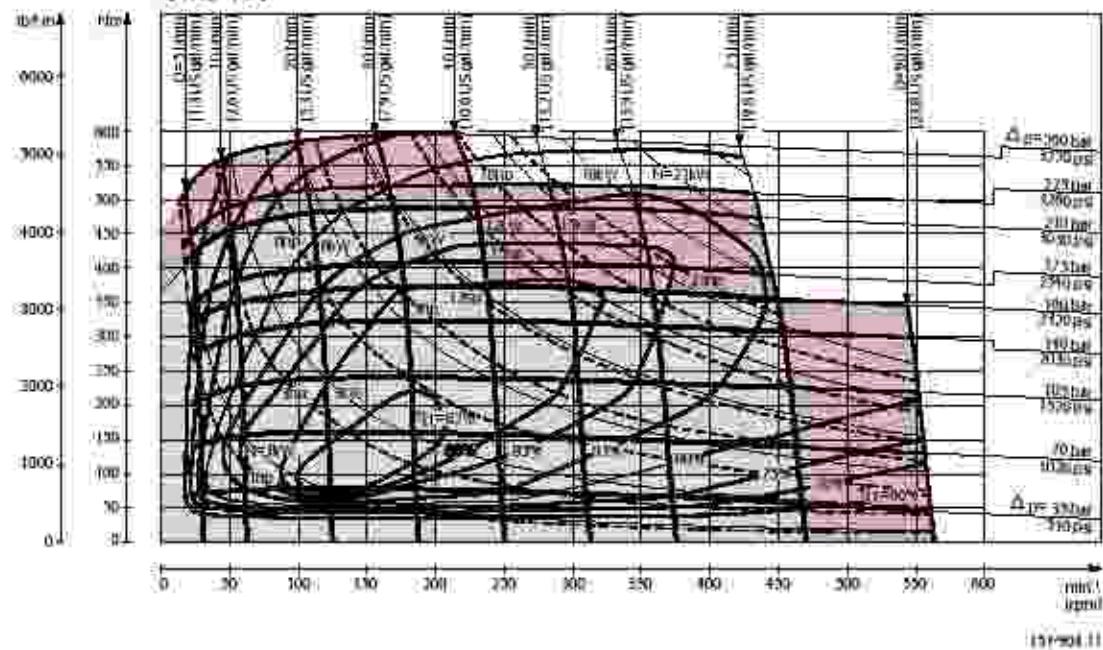


OMS

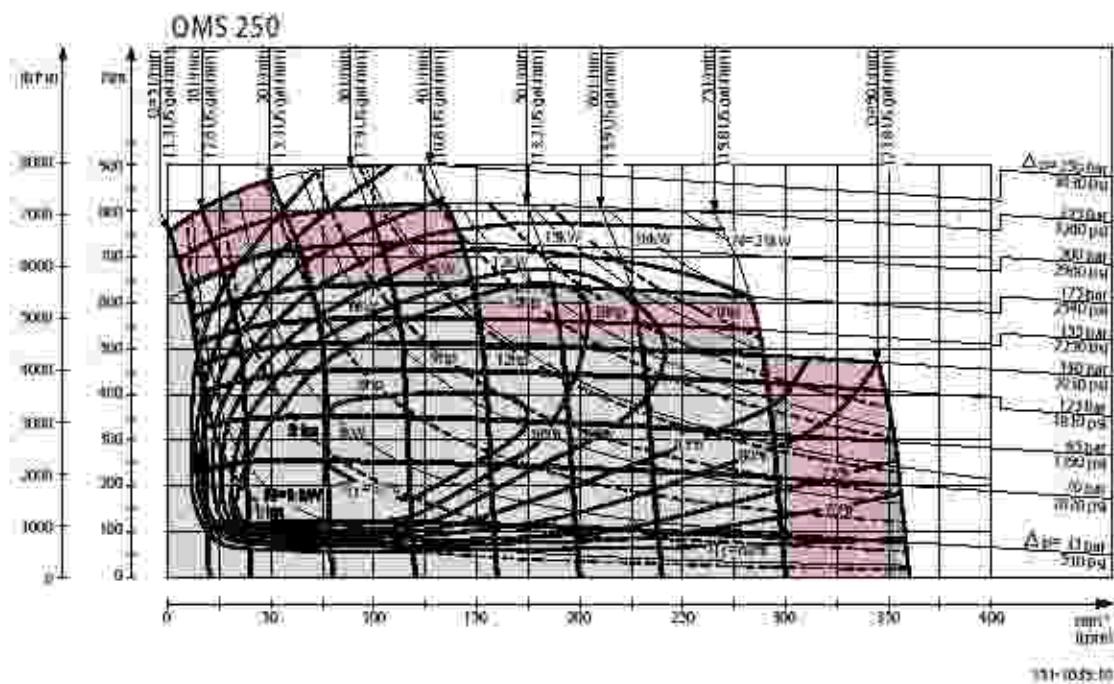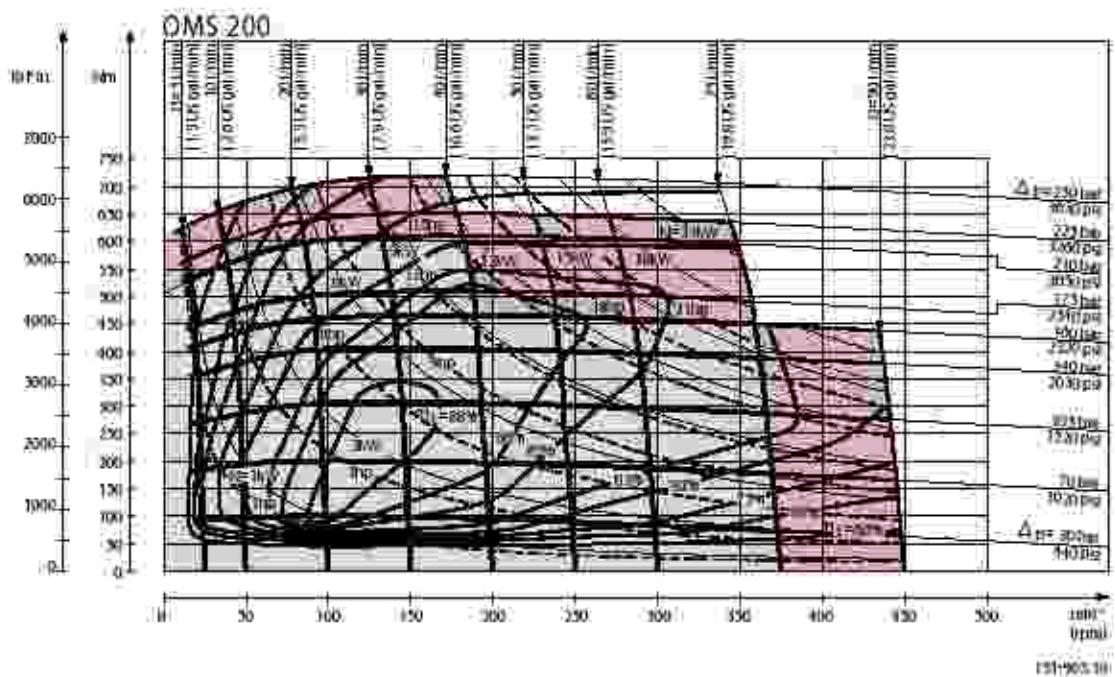


OMS

OMS 315

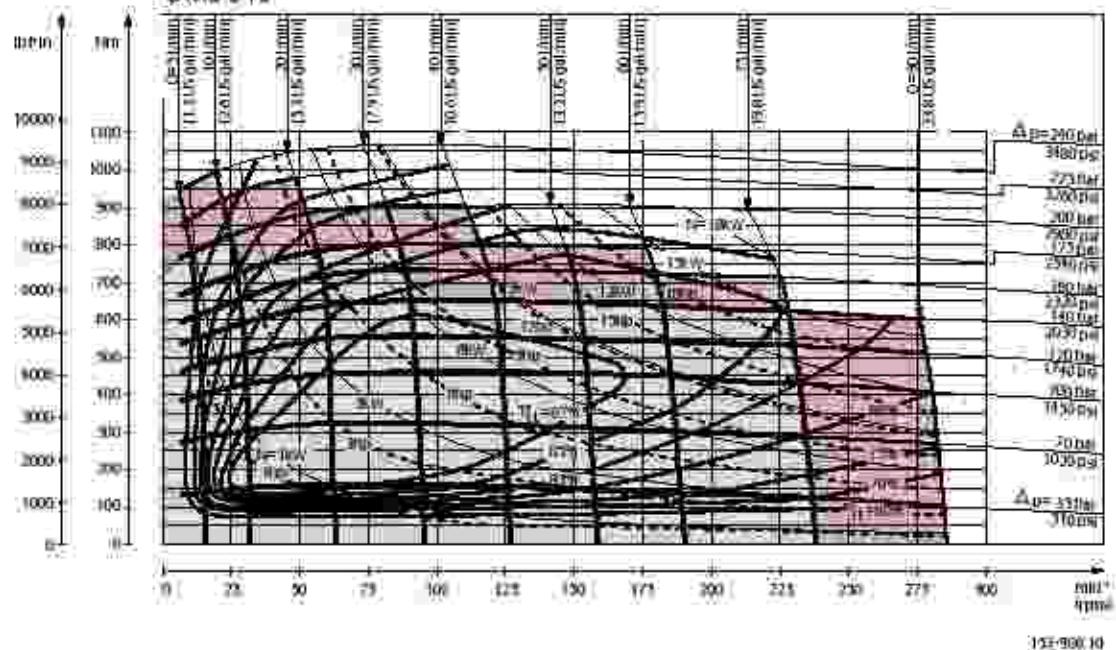


13E-9301.10

OMS 400

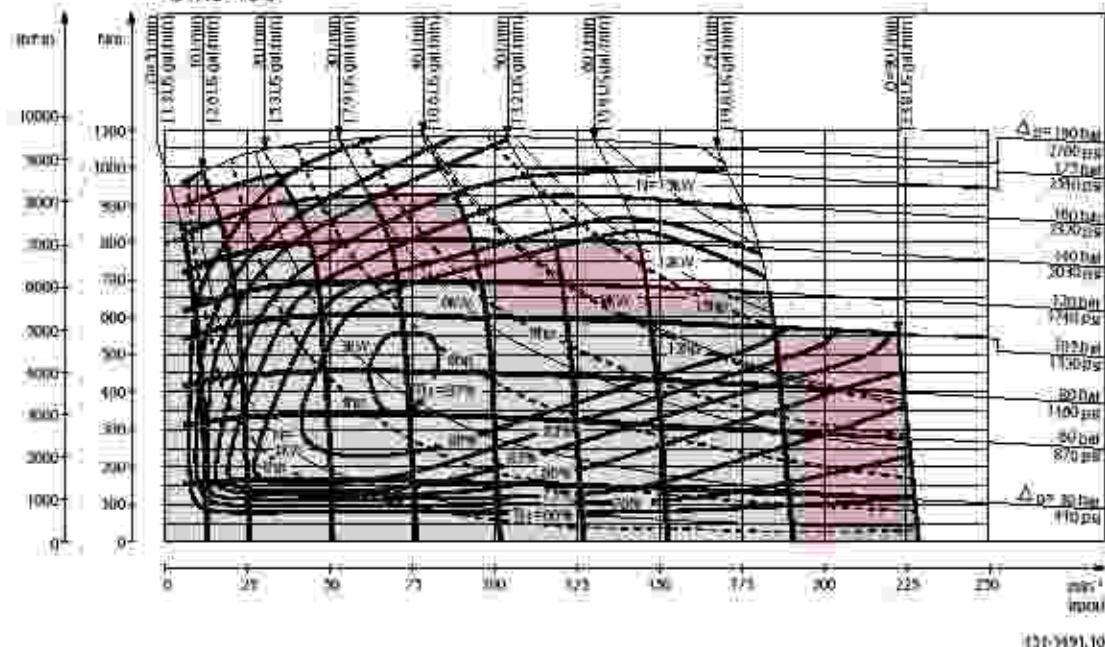

13I-9491.10


OMS

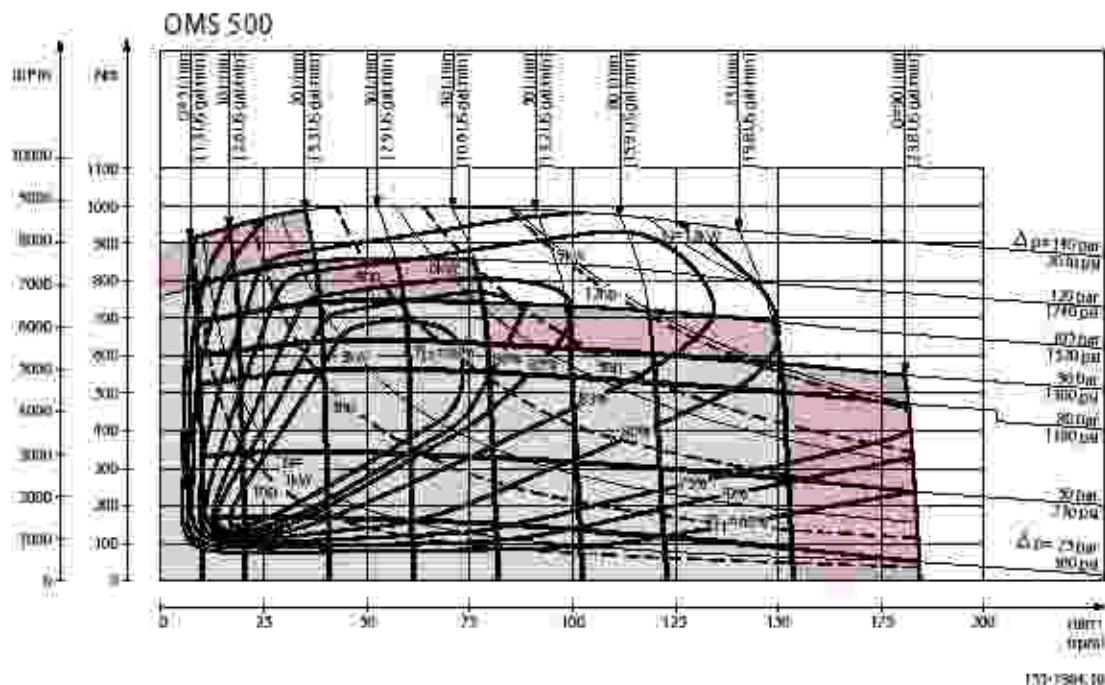**Function diagram use**


Explanation of function diagram use, basis and conditions: see [Speed, torque and output](#) on page 7.

Maximum permissible continuous/intermittent torque for the actual shaft version: see [Technical data](#) on page 11.

[Intermittent pressure drop and oil flow must not occur simultaneously](#)

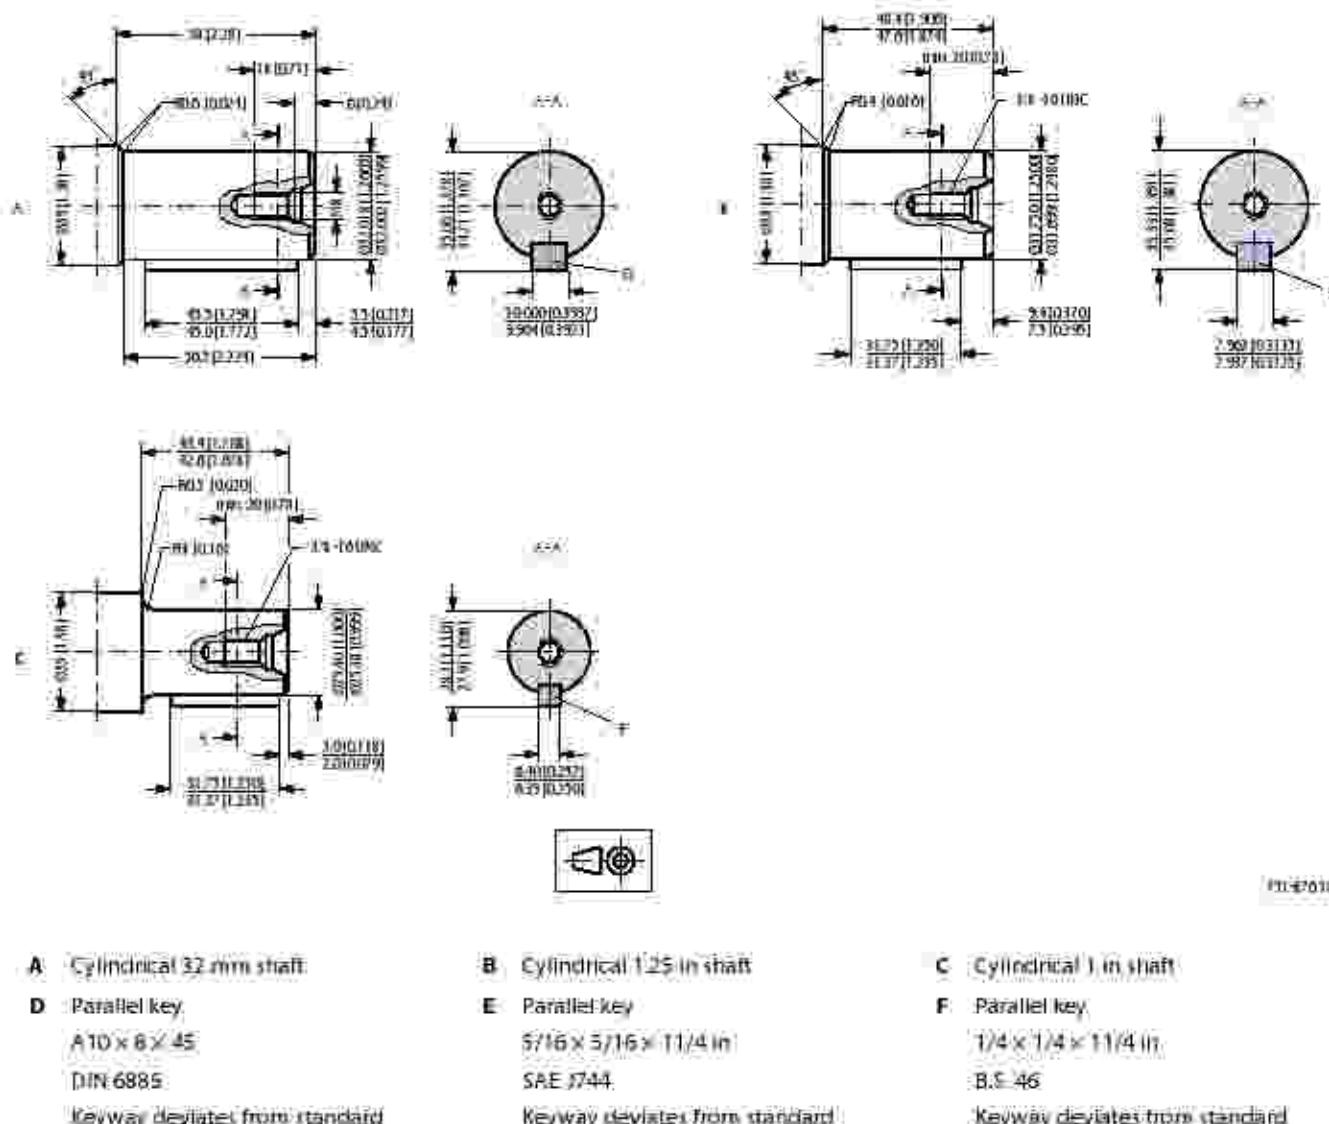OMS**Shaft version**

OMS

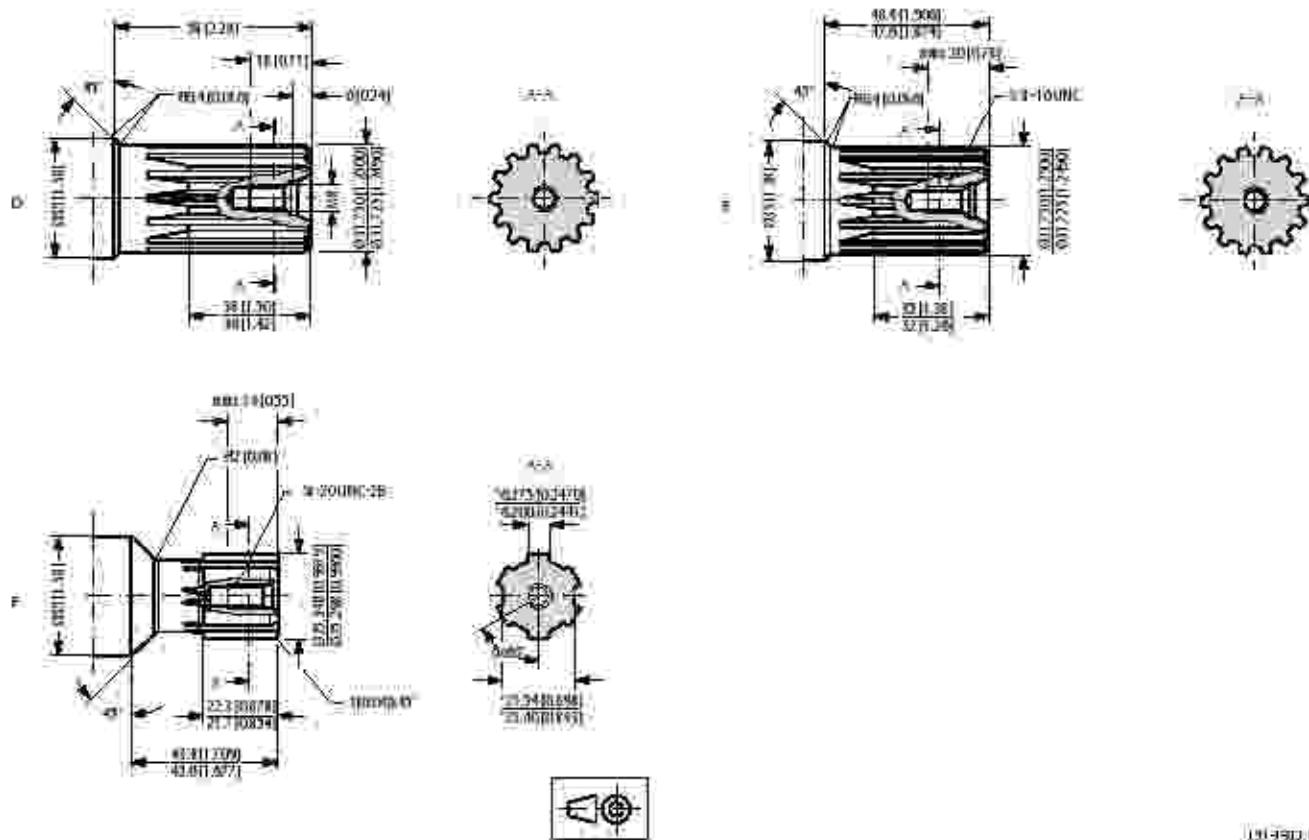


101-950.18

- D Involute splined shaft**
ANS B92.1 - 1970 standard
Flat root side fit
Pitch 12/24
Teeth 14
Major diameter 1.25 in
Pressure angle 30°

- E US version**
Involute splined shaft
ANS B92.1 - 1970 standard
Flat root side fit
Pitch 12/24
Teeth 14
Major diameter 1.25 in
Pressure angle 30°

- F Splined shaft**
SAE 6-B (B.S. 2059)
Straight-sided, bottom fitting, deep
Fit 2
Nominal size 1 in
*Deviates from SAE 6-B (B.S. 2059)

OMS

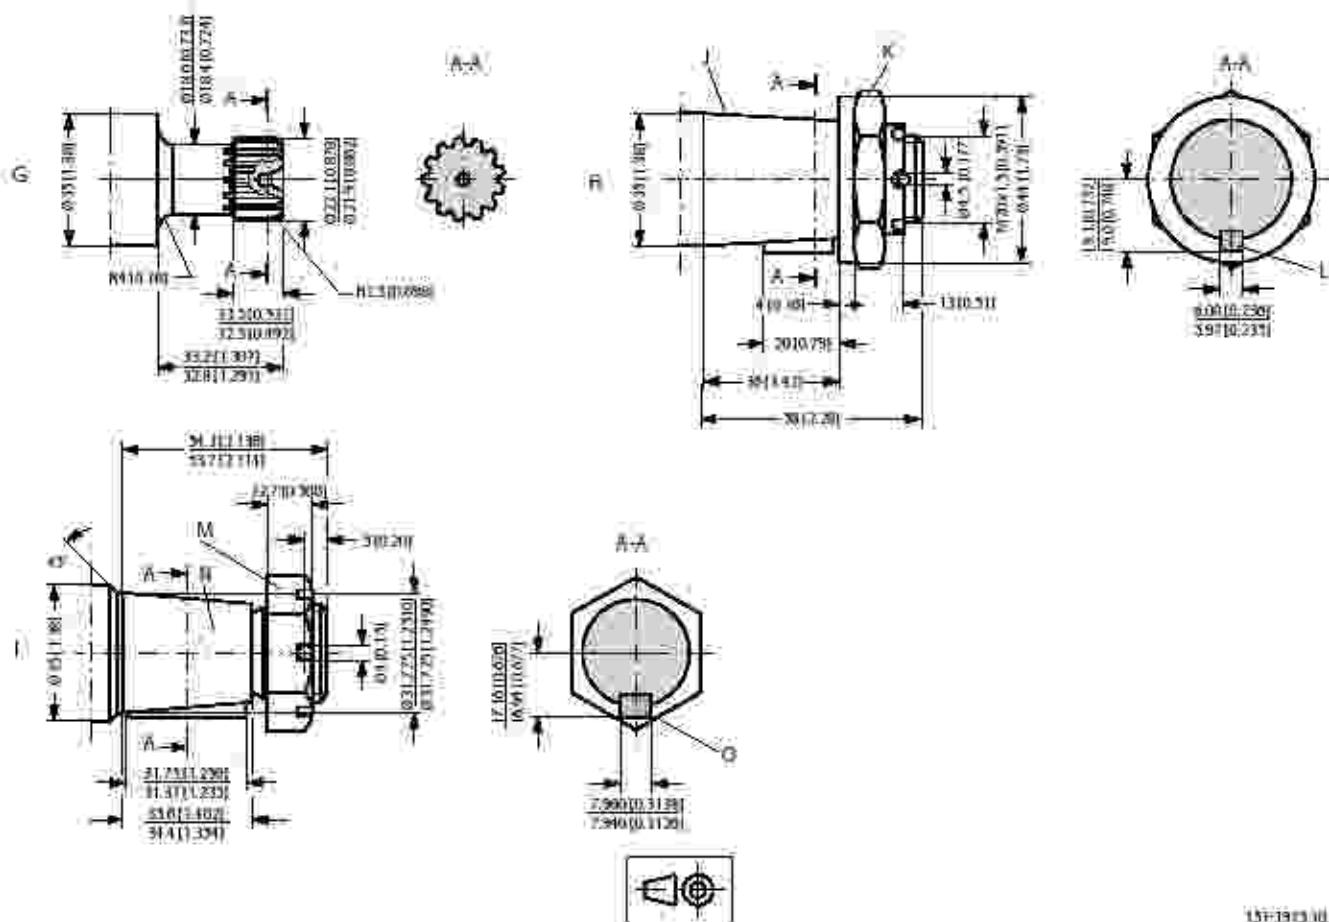


131-1313-10

- G** Involute splined shaft
ANS-B92-T - 1970 standard
Flat root side fit
Pitch 16/32
Teeth 13
Major dia. G8.75 in.
Pressure angle 30°
I Tapered 1 1/4 in shaft

- H** Tapered 35 mm shaft
(ISO/B775)
K DIN 937
Across flats: 41 mm
Tightening torque: 200 ± 10 Nm [1770 ± 85 lbf/in]
J Taper 1:10
L Parallel key
86x6x20
DIN 6885
Keyway deviates from standard

- I** Tapered 1 1/4 in shaft
M 1-20 UNEF
Across flats: 1 7/16 in
Tightening torque: 200 ± 10 Nm (1770 ± 85 lbf/in)
N Cone 1:8
SAE J501
O Parallel key
5/16 x 5/16 x 1 1/4
SAE J501
Keyway deviates from standard


OMS

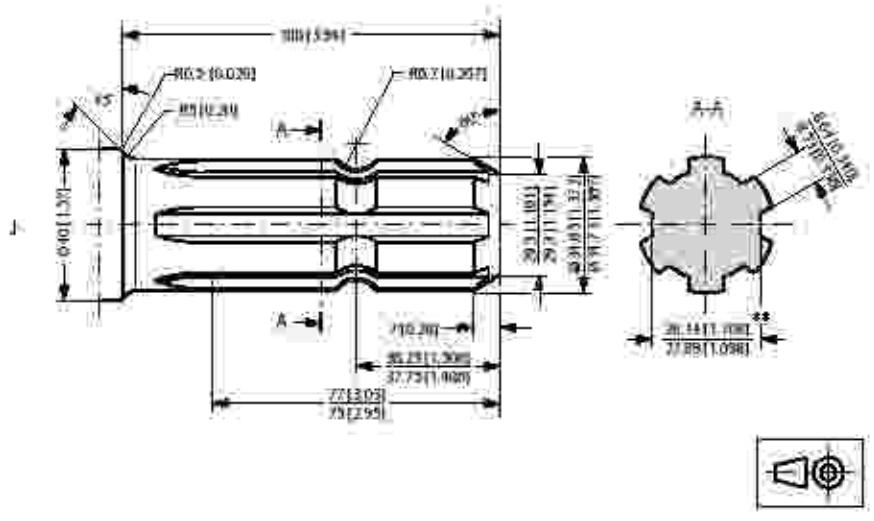

01-1948-10

- J Port shaft
DIN 9511 Form 1
(ISO/R500 without pin hole)
** Deviates from DIN 9511

Port thread versions

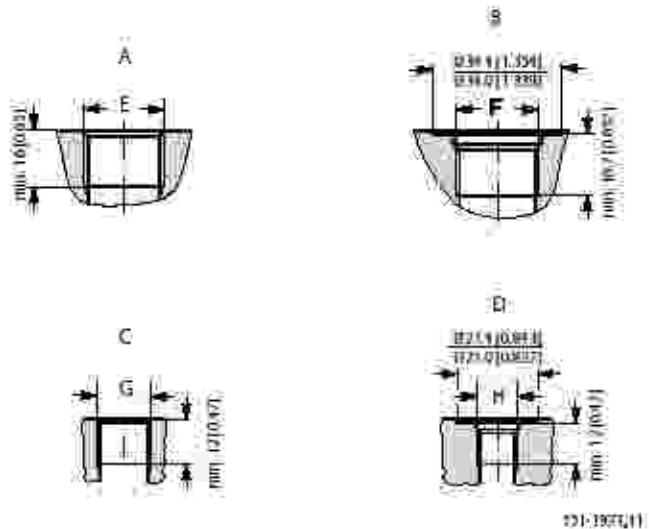

A G main ports
E ISO 228/1 - G1/2 O-ring boss port

B UNF main ports
F 7/8 - 14 UNF


C G drain port
G ISO 228/1 - G1/4 O-ring boss port

D UNF drain port
H 7/16 - 20 UNF

Dimensions

OMS

Standard flange—European version

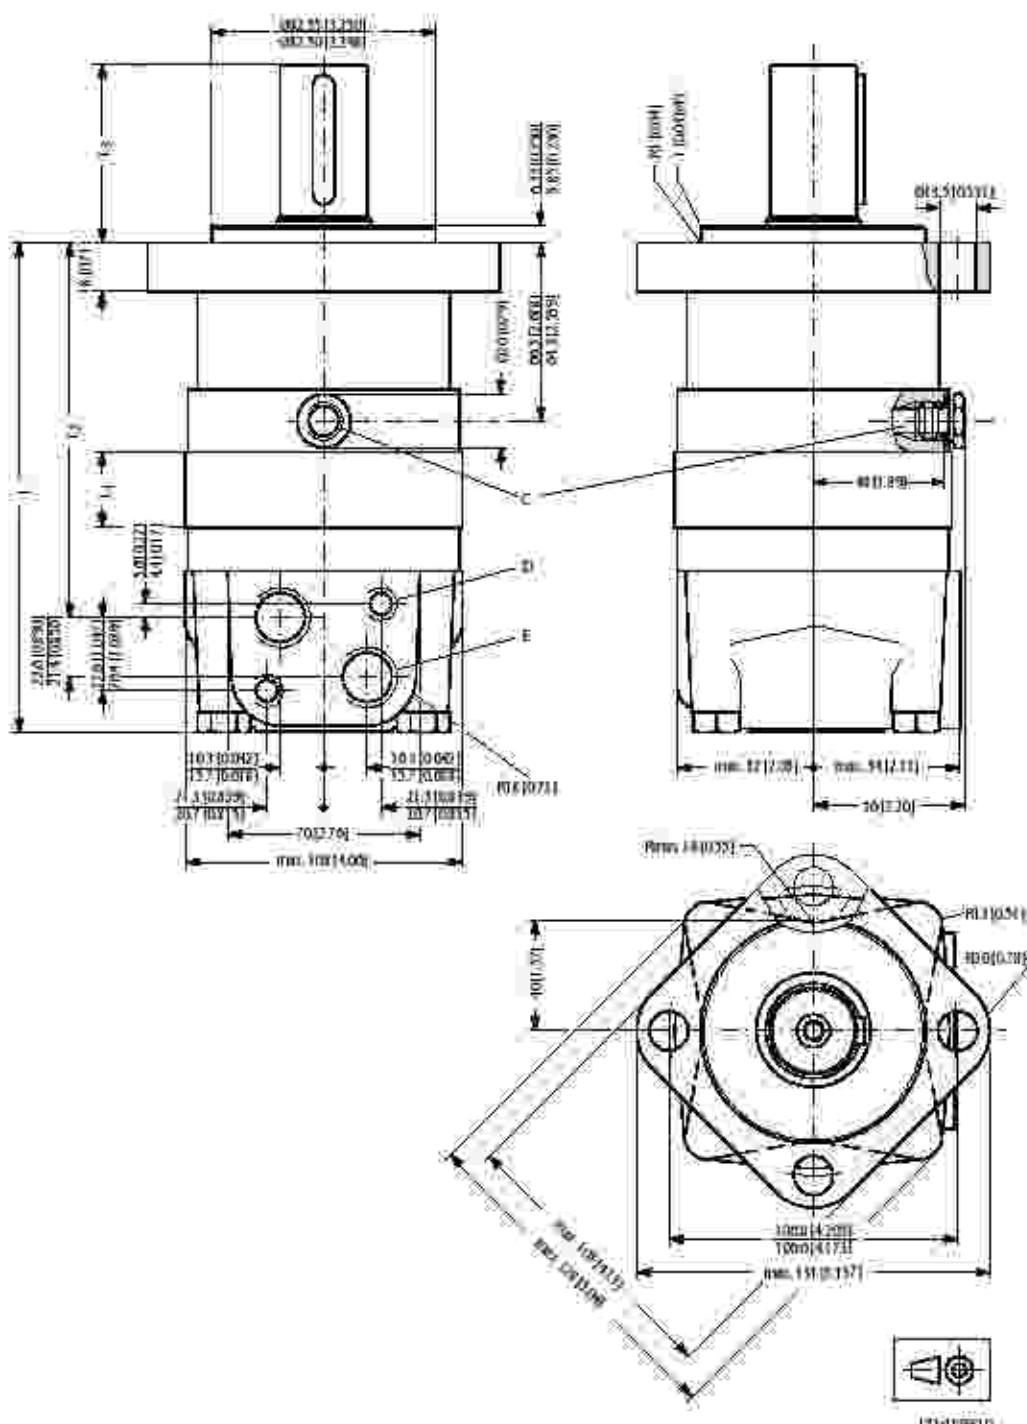

C Drain connection
G 1/4, 12 mm [0.47 in] deep

E G 1/2, 15 mm [0.59 in] deep

D: M10, 13 mm [0.51 in] deep

13-100310

OMS


Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMS 80	167 [6.57]	14.0 [0.551]	124 [4.88]
OMS 100	170 [6.69]	17.4 [0.685]	127 [5.00]
OMS 125	175 [6.89]	21.8 [0.858]	132 [5.20]
OMS 160	181 [7.13]	27.8 [1.094]	138 [5.43]
OMS 200	188 [7.40]	34.8 [1.370]	145 [5.71]
OMS 250	195 [7.72]	43.5 [1.713]	153 [6.02]
OMS 315	208 [8.19]	54.8 [2.157]	165 [6.50]
OMS 400	221 [8.70]	68.4 [2.693]	178 [7.01]

Output shaft	L _o mm [in]	
All shafts except P-to-shaft	max	67 [2.64]
	min	65 [2.56]
P-to-shaft	max	109 [4.29]
	min	107 [4.21]

OMS

Standard flange—US version

Standard flange

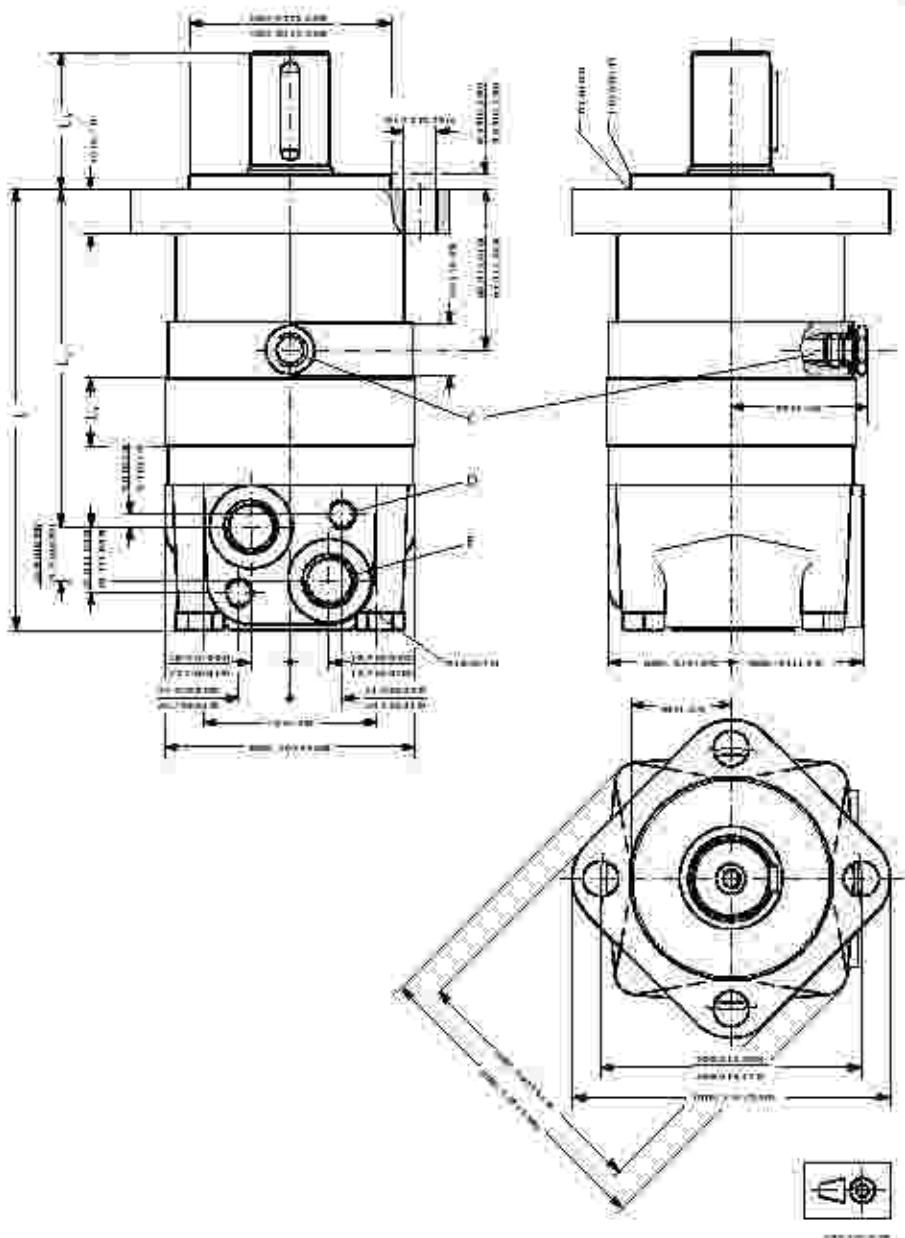

C: Drain connection
3/16 - 20 UNF
12 mm [0.47 in] deep
O-ring boss port

D: M10 x 15 mm [0.51 in] deep

E: 7/8 - 16 UNF
16.7 mm [0.657 in] deep
O-ring boss port

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMS 80	167 [6.57]	14.0 [0.551]	124 [4.88]
OMS 100	170 [6.69]	17.4 [0.685]	127 [5.00]
OMS 125	175 [6.89]	21.8 [0.858]	132 [5.20]


OMS

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMS 160	161 [6.33]	37.8 [1.494]	138 [5.43]
OMS 200	188 [7.40]	34.8 [1.370]	145 [5.71]
OMS 250	196 [7.72]	43.5 [1.713]	153 [6.02]
OMS 315	208 [8.19]	54.8 [2.157]	165 [6.50]
OMS 400	221 [8.70]	68.4 [2.693]	178 [7.01]
OMS 500	221 [8.70]	58.4 [2.693]	178 [7.01]

Output shaft	L ₂ mm [in]
Cyl 1.25 in. Splined 1.25 in	max
	min
Tapered 1.25 in.	max
	min

OMS

Special flange—European version

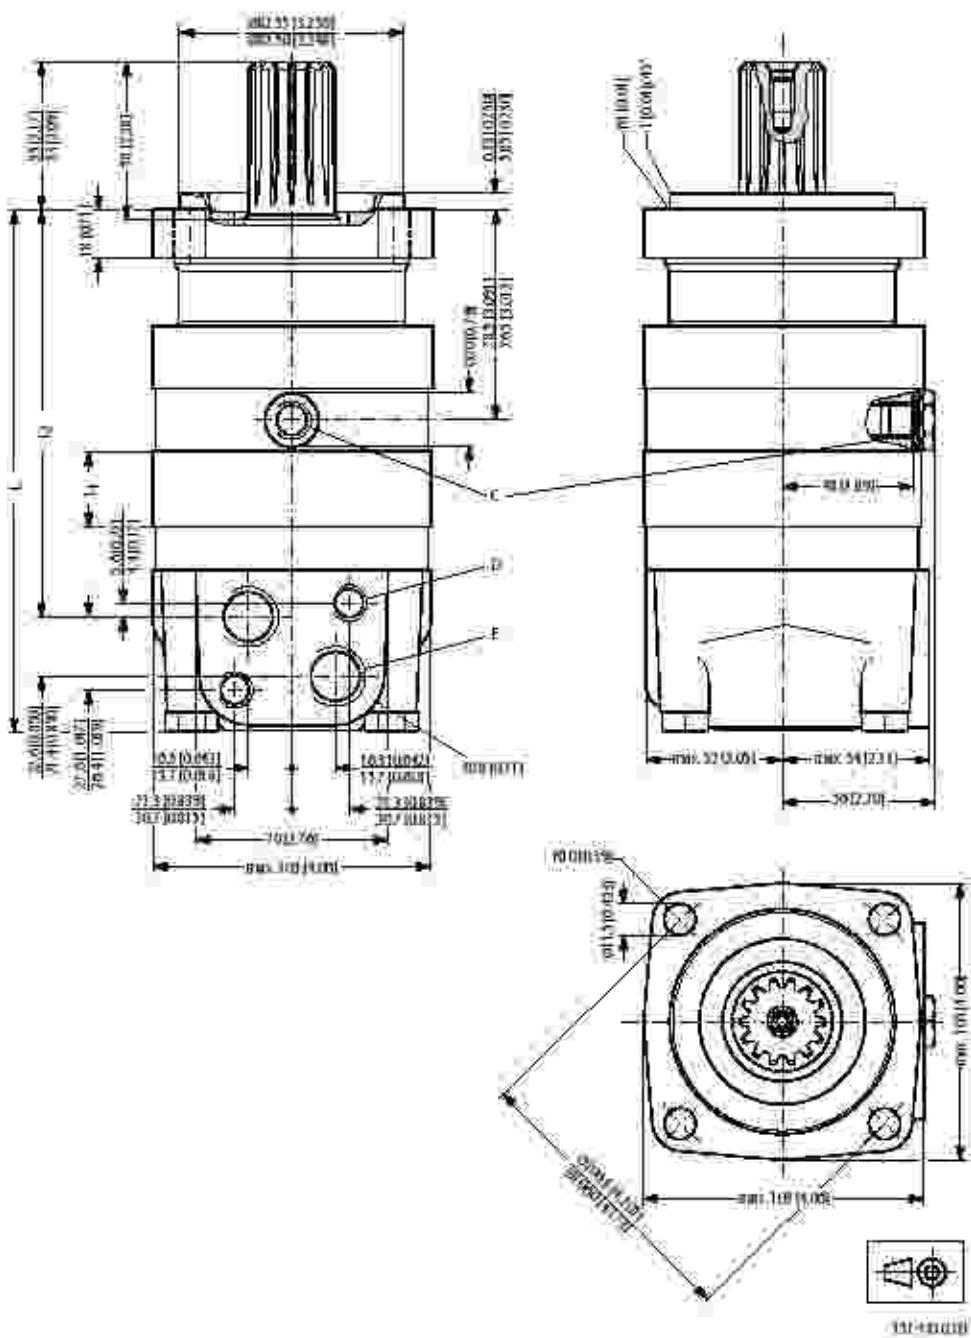

C: Drain connection

G 1/2" 12 mm [0.47 in] deep

E: G 1/2" 15 mm [0.59 in] deep


D: M10; 13 mm [0.51 in] deep

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMS 90	178 [7.01]	14.0 [0.55]	136 [5.35]
OMS 100	182 [7.17]	17.6 [0.685]	140 [5.51]

OMS

Type	L_{\max} mm [in]	L_1 mm [in]	L_2 mm [in]
OMS 125	186 [7.32]	218 [8.58]	144 [5.67]
OMS 160	192 [7.56]	278 [10.94]	150 [5.91]
OMS 200	199 [7.83]	348 [13.70]	157 [6.18]
OMS 250	208 [8.19]	435 [17.13]	166 [6.54]
OMS 315	219 [8.62]	548 [21.57]	177 [6.97]
OMS 400	232 [9.11]	684 [26.93]	190 [7.48]

A-2 flange—US version

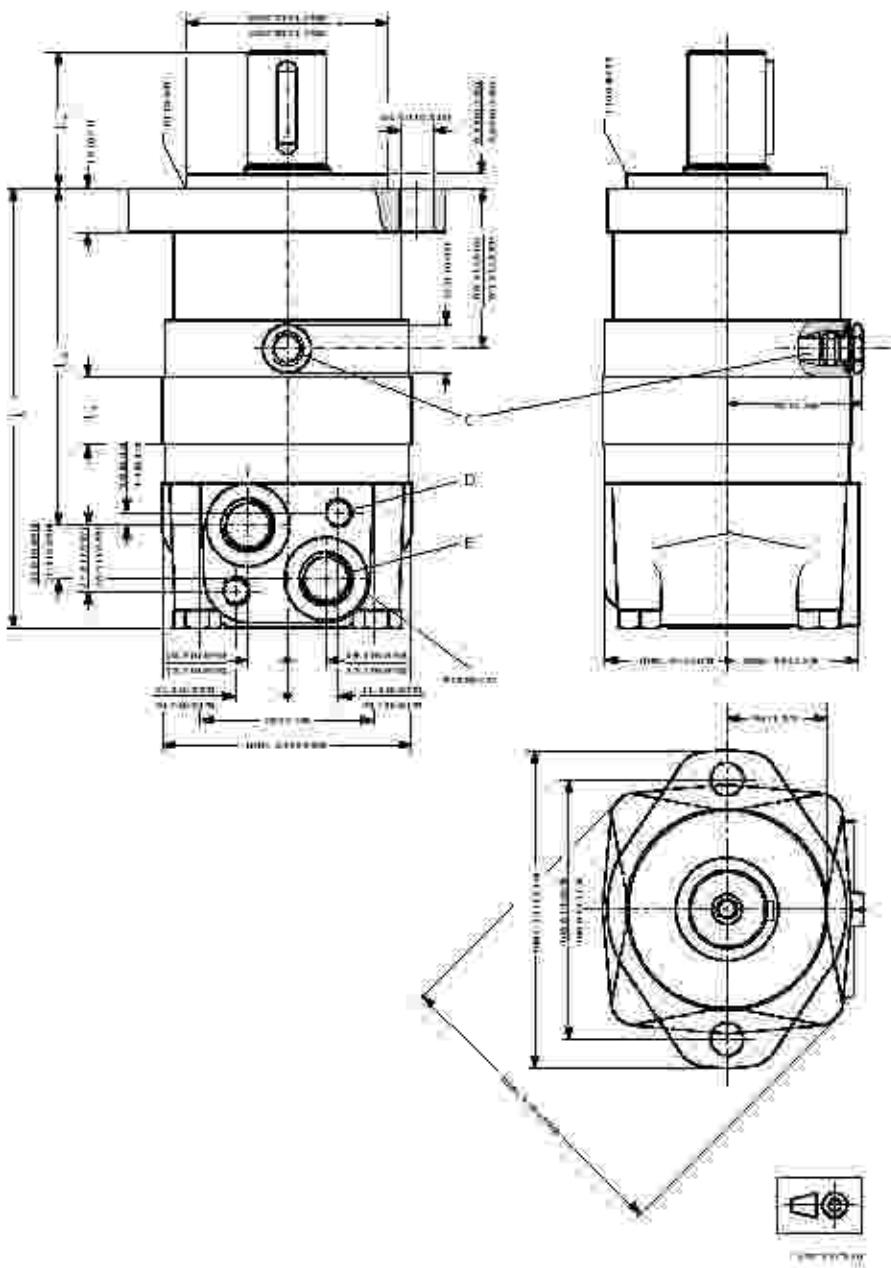

C: Drain connection
1/16 - 20 UNF

D: M10 | 13 mm [0.51 in] deep

OMS


12 mm [0.47 in] deep
O-ring boss port
E 7/8 - 14 UNF
16.7 mm [0.657 in] deep
O-ring boss port

Type	L ₀₀ mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMS 80	162 [6.57]	14.0 [0.551]	124 [4.88]
OMS 100	170 [6.69]	17.4 [0.685]	127 [5.00]
OMS 125	175 [6.89]	21.8 [0.858]	132 [5.20]
OMS 160	181 [7.13]	27.8 [1.094]	138 [5.43]
OMS 200	188 [7.40]	34.8 [1.370]	145 [5.71]
OMS 250	196 [7.72]	43.5 [1.713]	153 [6.02]
OMS 315	208 [8.19]	54.8 [2.157]	165 [6.50]
OMS 400	221 [8.70]	68.4 [2.693]	178 [7.01]
OMS 500	221 [8.70]	68.4 [2.693]	178 [7.01]

Output shaft:	L ₃ mm [in]	
Cyl. 1 in. Splined 1 in.	max	52 [2.05]
	min	50 [1.97]
Cyl 1.25 in. Splined 1.25 in	max	57 [2.24]
	min	55 [2.17]
Tapered 1.25 in.	max	57 [2.24]
	min	55 [2.17]

OMS

Magneto flange—US version

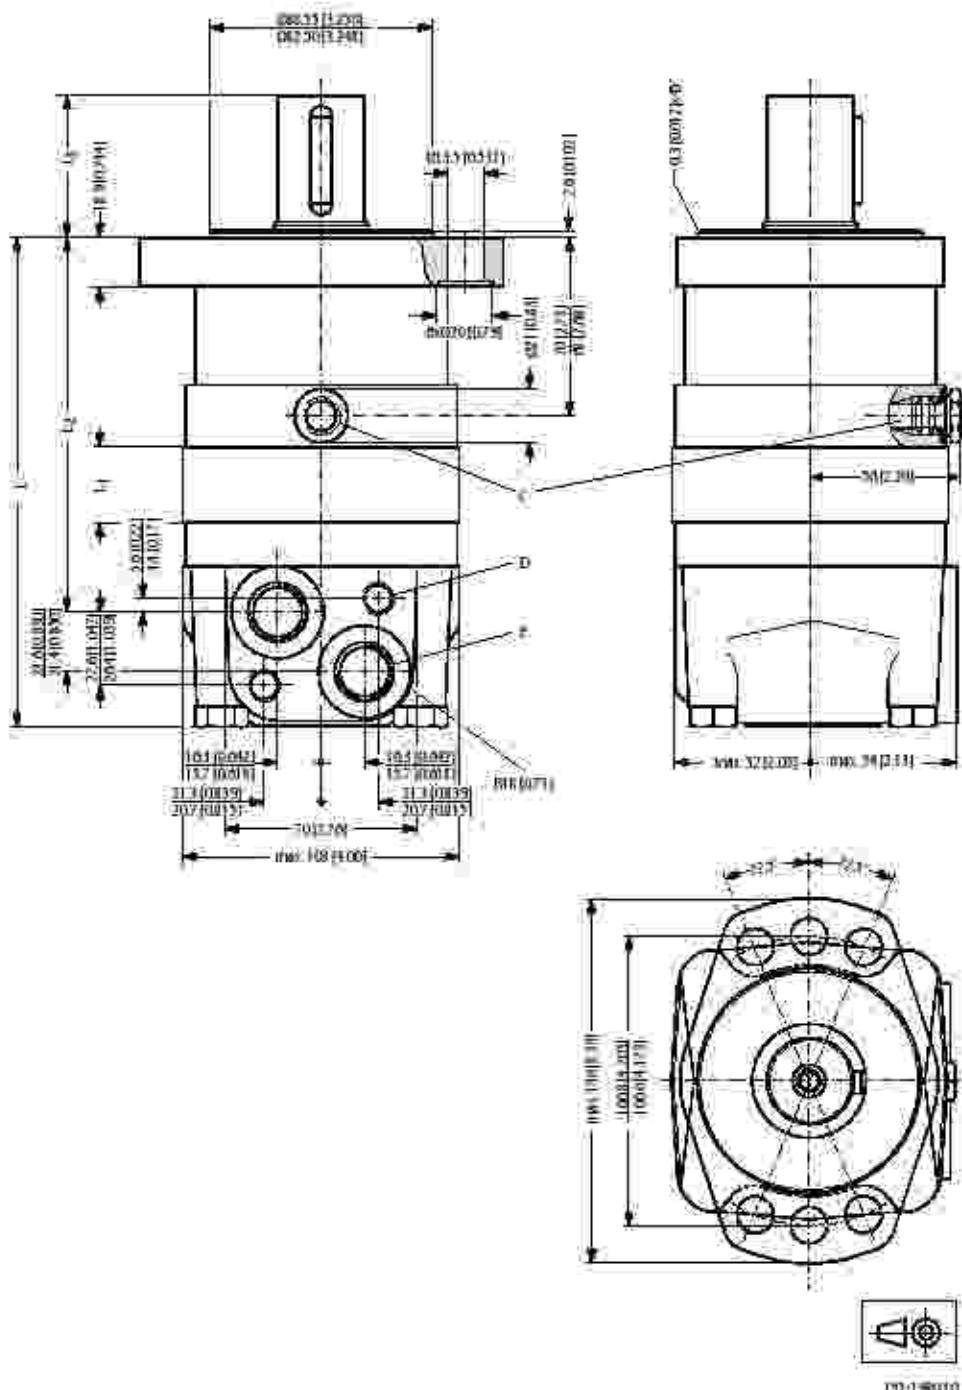


OMS

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMS 80	171 [6.73]	140 [5.51]	128 [5.04]
OMS 100	174 [6.85]	174 [6.85]	131 [5.16]
OMS 125	179 [7.05]	21.8 [0.858]	136 [5.35]
OMS 160	185 [7.28]	27.8 [1.094]	142 [5.59]
OMS 200	192 [7.56]	34.8 [1.370]	149 [5.87]
OMS 250	200 [7.87]	43.5 [1.713]	157 [6.18]
OMS 315	212 [8.35]	54.8 [2.157]	169 [6.65]
OMS 400	225 [8.86]	68.4 [2.693]	182 [7.17]
OMS 500	225 [8.86]	68.4 [2.693]	182 [7.17]

Output shaft	L ₃ mm [in]
Cyl. 1 in Splined 1 in	max: 49 [1.93] min: 47 [1.85]
Cyl. 1.25 in Splined 1.25 in	max: 54 [2.13] min: 52 [2.05]

OMS

SAE-B flange—US version

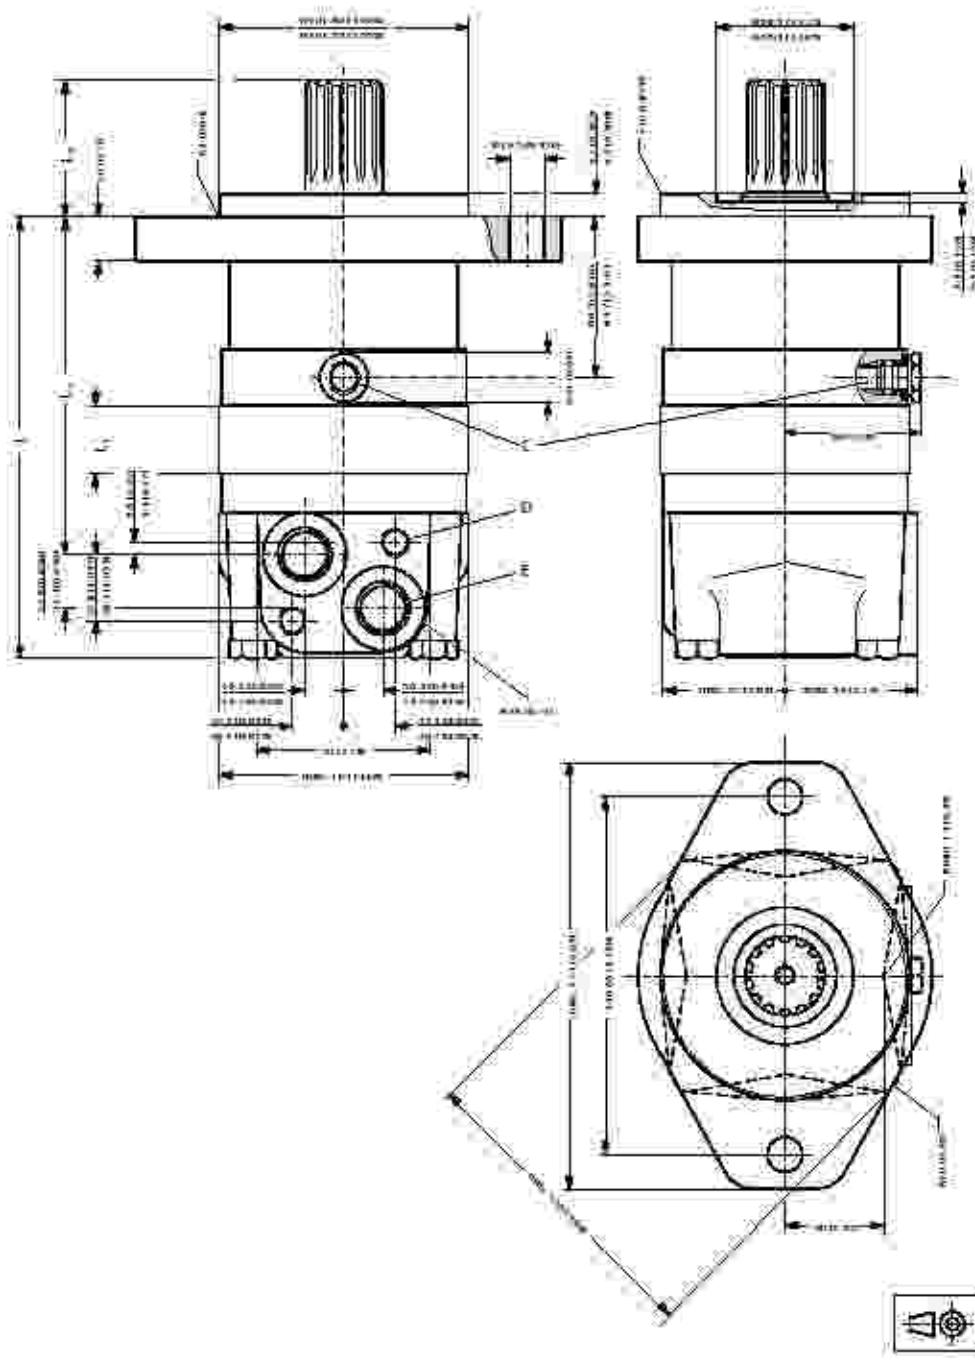

C: Drain connection
7/16-20 UNF
12 mm [0.47 in] deep
G-ring boss port

E: 7/8-14 UNF
16.7 mm [0.657 in] deep
O-ring boss port

D: M10/13 mm [0.51 in] deep


OMS

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMS 80	167 [6.52]	140 [0.551]	124 [4.88]
OMS 100	170 [6.69]	174 [0.685]	127 [5.00]
OMS 125	175 [6.89]	218 [0.858]	132 [5.20]
OMS 160	181 [7.13]	278 [1.094]	138 [5.43]
OMS 200	188 [7.40]	34.8 [1.370]	145 [5.71]
OMS 250	196 [7.71]	43.5 [1.713]	153 [6.02]
OMS 315	208 [8.19]	54.8 [2.157]	165 [6.50]
OMS 400	221 [8.70]	68.4 [2.693]	178 [7.01]
OMS 500	221 [8.70]	68.4 [2.693]	178 [7.01]

Output shaft	L ₃ mm [in]	
Splined 125 mm	max	57 [2.34]
	min	55 [2.17]
Splined 0.875 in	max	42 [1.65]
	min	40 [1.57]

OMS

Wheel—European Version

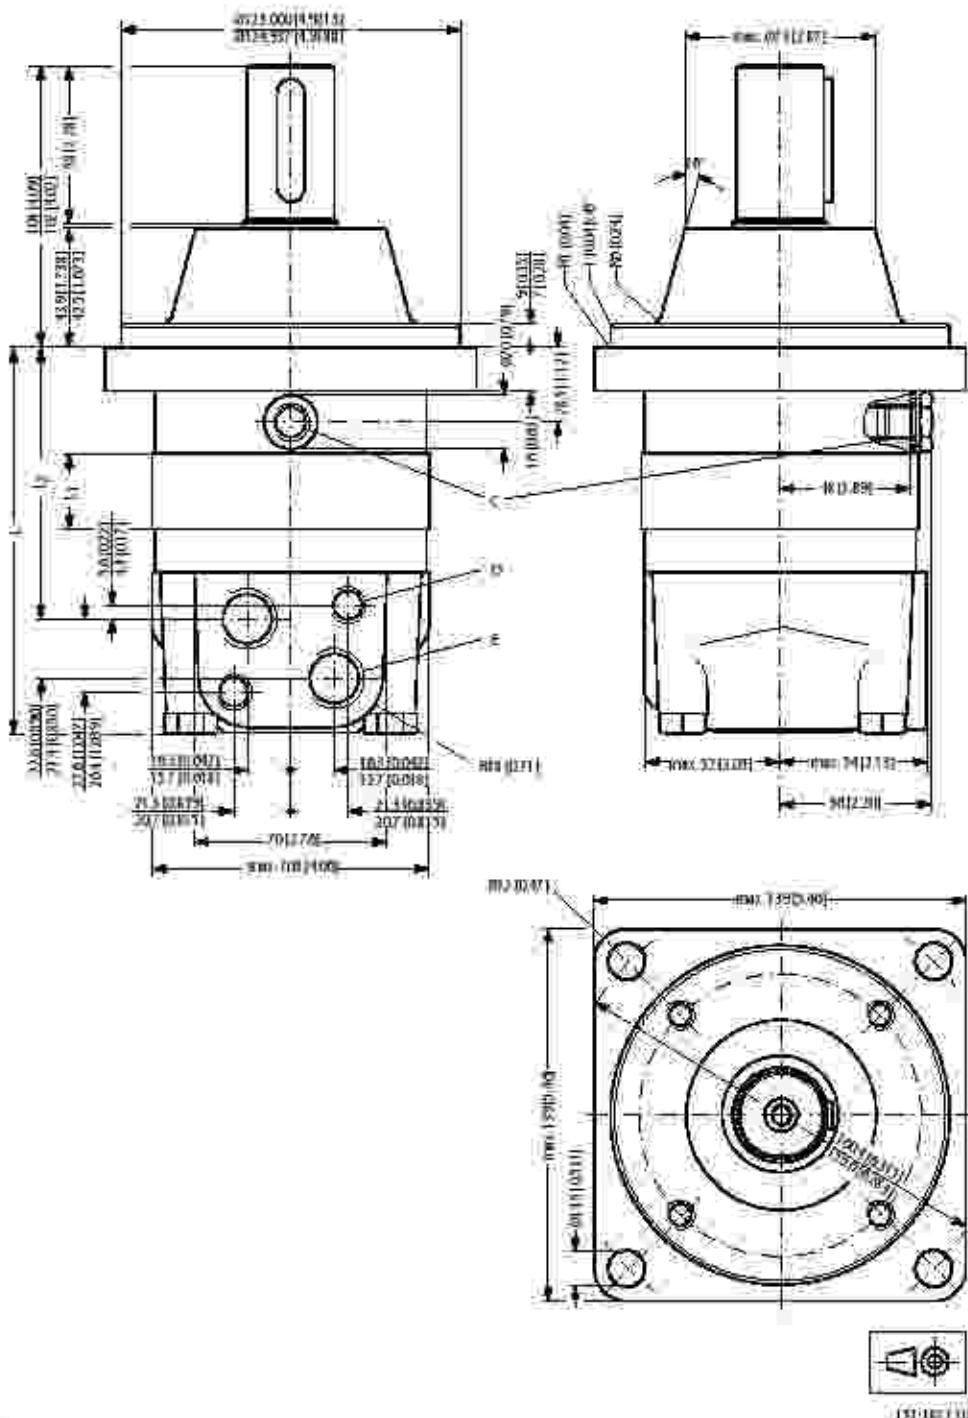

C: Drain connection
G 14; 12 mm [0.47 in] deep

E: G 12; 15 mm [0.59 in] deep


D: M10; 13 mm [0.51 in] deep

OMS

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMSW 80	129 [5.08]	140 [5.51]	87 [3.43]
OMSW 100	132 [5.20]	174 [6.85]	90 [3.54]
OMSW 125	137 [5.39]	218 [8.58]	95 [3.74]
OMSW 160	143 [5.63]	278 [10.94]	101 [3.98]
OMSW 200	150 [5.91]	34.8 [1.370]	108 [4.25]
OMSW 250	158 [6.22]	43.5 [1.713]	116 [4.57]
OMSW 315	170 [6.69]	54.8 [2.157]	128 [5.04]
OMSW 400	183 [7.20]	68.4 [2.693]	142 [5.59]

OMS

Wheel—US version

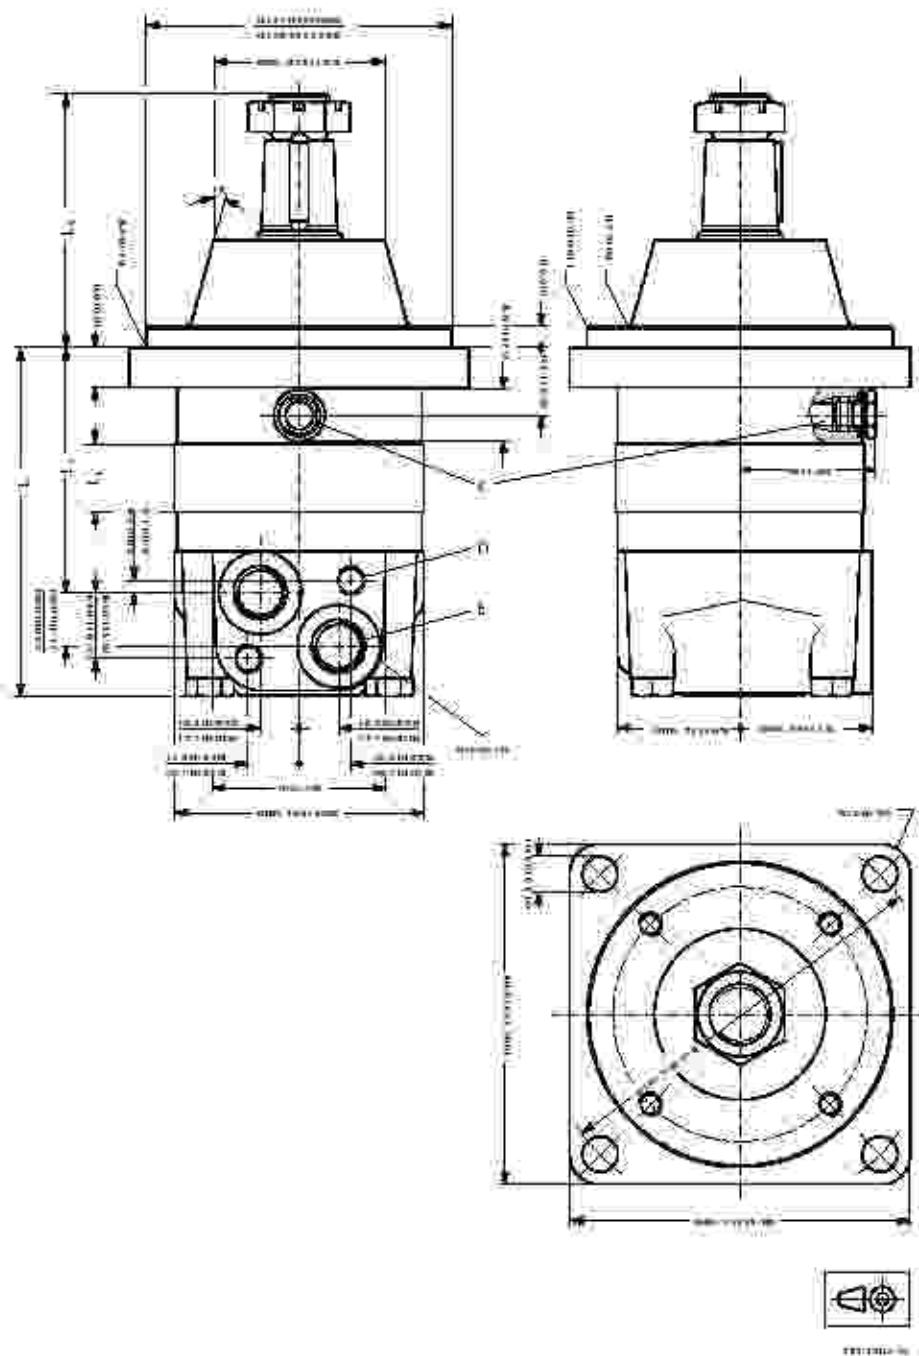

C: Drain connection
7/16 - 20 UNF
12 mm [0.47 in] deep
O-ring boss port

D: M10x1.5 mm [0.51 in] deep

E: 7/8 - 14 UNF
16.7 mm [0.657 in] deep
O-ring boss port

Type	L _{max} , mm [in]	L ₁ , mm [in]	L ₂ , mm [in]
OMSW/80	130 [5.12]	14.0 [0.551]	88 [3.46]
OMSW/100	133 [5.24]	17.4 [0.685]	91 [3.58]


OMS

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMSW 125	136 [5.33]	21.8 [0.858]	96 [3.78]
OMSW 160	144 [5.67]	27.8 [1.094]	102 [4.02]
OMSW 200	151 [5.94]	34.8 [1.370]	109 [4.29]
OMSW 250	159 [6.26]	43.5 [1.713]	117 [4.61]
OMSW 315	171 [6.73]	54.8 [2.157]	129 [5.08]
OMSW 400	184 [7.24]	68.4 [2.693]	142 [5.59]
OMSW 500	184 [7.24]	68.4 [2.693]	142 [5.59]

Output shaft	L ₂ mm [in]	
Cylindrical 1.25 in.	max	94 [3.70]
	min	92 [3.62]
Tapered 1.25 in.	max	104 [4.09]
	min	102 [4.02]

OMS

Short—European version

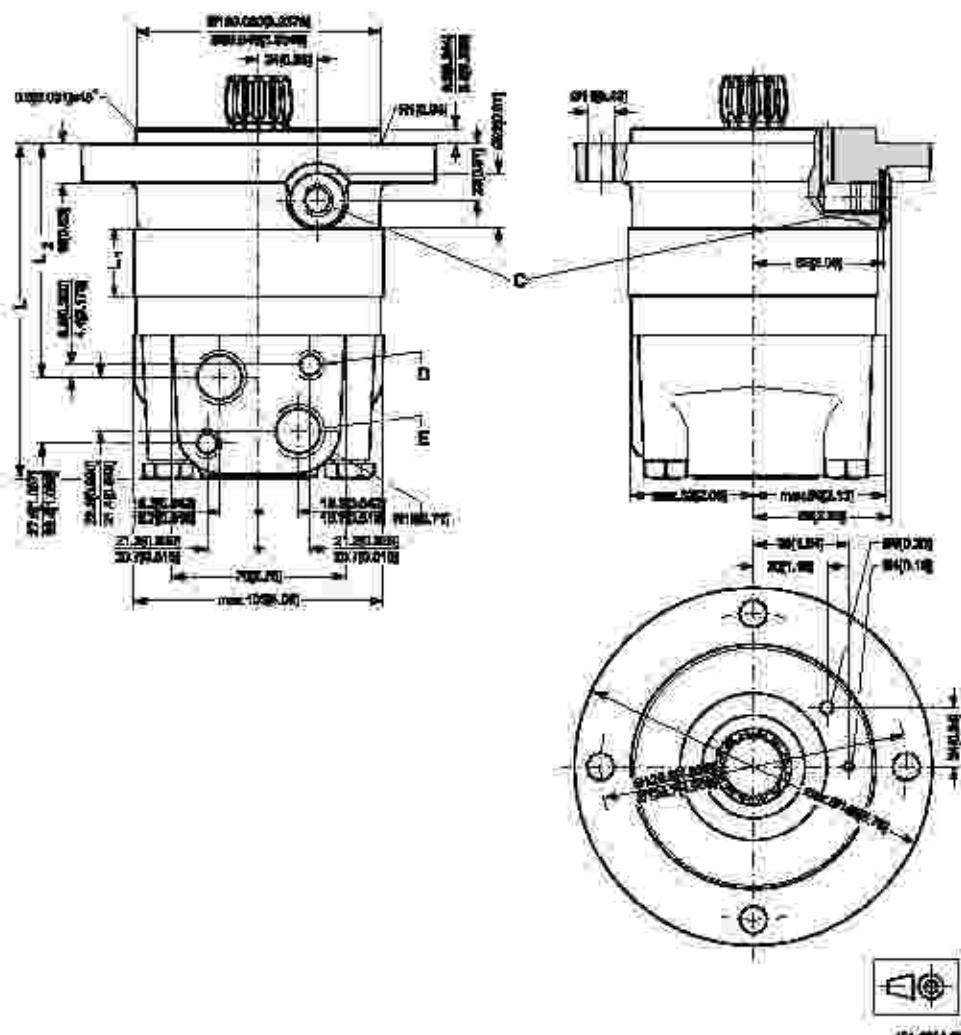

C: Drain connection

G 1/4" 12 mm [0.47 in] deep

D: M10x13 mm [0.51 in] deep

E: G 1/2" 15 mm [0.59 in] deep

Type	t_{min} mm [in]	t_2 mm [in]	t_3 mm [in]
OMSS80	124 [4.88]	14.0 [0.551]	63 [3.22]
OMSS 100	128 [5.04]	17.4 [0.685]	86 [3.39]
OMSS 125	132 [5.20]	21.8 [0.858]	90 [3.54]
OMSS 160	138 [5.43]	27.8 [1.094]	96 [3.78]
OMSS 200	145 [5.71]	34.8 [1.370]	103 [4.06]
OMSS 250	154 [6.06]	43.5 [1.713]	112 [4.41]
OMSS 315	163 [6.53]	54.8 [2.157]	123 [4.84]
OMSS 400	179 [7.05]	68.4 [2.693]	137 [5.39]

OMS**OMSS****Installing the OMSS**

The cardan shaft of the OMSS motor acts as an "output shaft". Because of the movement of the shaft no seal can be fitted at the shaft output.

Internal oil leakage from the motor will therefore flow into the attached component.

During start and operation it is important that the spline connection and the bearings in the attached component receive oil and are adequately lubricated. To ensure that the spline connection receives sufficient oil, a conical sealing ring between the shaft of the attached component and the motor intermediate plate is recommended. This method is used in the OMS.


The conical sealing ring (code no. 633B9023) is supplied with the motor.

To ensure that oil runs to the bearings and other parts of the attached component, the stop plate must have a hole in it (see fig. below).

We recommend an O-ring between motor and attached component. The O-ring (code no. 15TE1032) is supplied with the motor. If motor and attached component have been separated, remember to refill before starting up. Fill the oil through the drain connection.

Attached component dimensions

OMSS dimensions of the attached component in millimeter [inches].

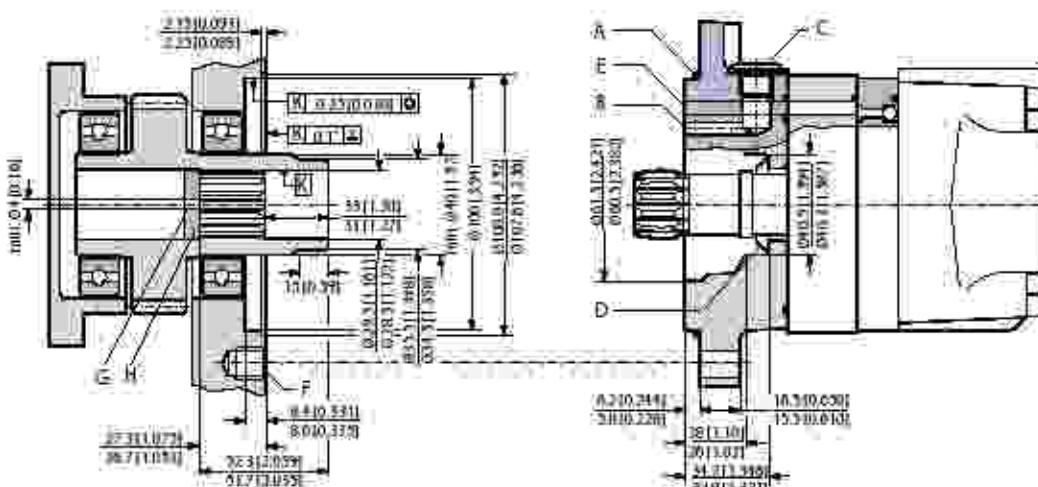

A O-ring: 100 x 3 mm

B External drain channel

C Drain connection G 1/4; 12 mm [0.47 in] deep

D Conical seal ring

E Internal drain channel

F M10; min. 15 mm [0.59 in] deep

G Oil circulation hole

H Hardened stop plate

Internal spline data for the component to be attached

The attached component must have internal splines corresponding to the external splines on the motor cardan shaft (see drawing below).

OMS

Material:

Case hardening steel with a tensile strength corresponding at least to 20 MoCr4 (900 N/mm²) or SAE 8620.


Hardening specification:

- On the surface: HV = 750 ± 50
- 0.7 ± 0.2 mm under the surface: HV = 560

(internal involute spline data) Standard ANSI 892.1-1970, class S (corrected m: X = 0.8; m = 2.1166)

Flat root side fit		mm	in
Number of teeth	z	12	12
Pitch	DP	12/24	12/24
Pressure angle		30°	30°
Pitch dia.	D _p	25.4	1.0
Major dia.	D _m	28.00 ^{+0.01} _{-0.01}	1.100 ^{+0.004} _{-0.004}
Form dia. (min.)	D _f	27.6	1.09
Minor dia.	D _i	23.0 ^{+0.01} _{-0.01}	0.9055 ^{+0.0015} _{-0.0015}
Space width (circular)	L _s	4.308 ^{+0.020} _{-0.020}	0.1696 ^{+0.0008} _{-0.0008}
Tooth thickness (circular)	S _t	2.381	0.09217
Fillet radius	R _{min}	0.2	0.008
Max. meas. ment between pins ^a		17.620 ^{+0.13} _{-0.06}	0.700 ^{+0.006} _{-0.006}
Pin dia.	d	4.835 ^{+0.001} _{-0.001}	0.1903 ^{+0.0004} _{-0.0004}

^a Finished dimensions (when hardened).

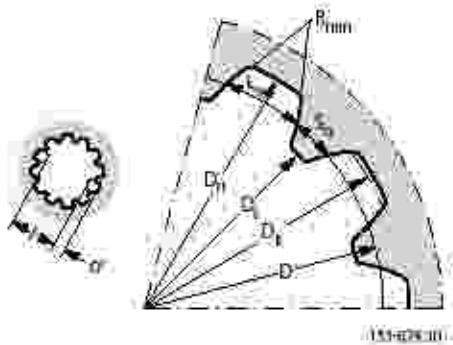

155-02630

Motor or attached component drain connection

Use the drain line when pressure in the return line exceeds the permissible pressure on the shaft seal of the attached component.

Connect the drain line either at the:

- Motor drain connection
- Drain connection of the attached component

If a drain line is fitted to the attached component, it must be possible for oil to flow freely between motor and attached component.

OMS

The drain line must be led to the tank in such a way that there is no risk of the motor and attached component being drained of oil when at test.

The maximum pressure in the drain line is limited by the attached component and its shaft seal.

OMT

Versions

OMT versions

Mounting flange	Shaft	Portsize	European version	US version	Drain connection	Check valve	Low pressure release	High pressure release	Main type designation
Standard flange	Cyl. 40 mm	G 3/4	X		Yes	Yes			OMT
	Cyl. 1.5 in.	1 1/16-12 UN		X	Yes	Yes			OMT
	Spined 1.5 in	G 3/4	X		Yes	Yes			OMT
		1 1/16-12 UN		X	Yes	Yes			OMT
	Tapered 45 mm	G 3/4	X		Yes	Yes			OMT
	Tapered 1.75 in	1 1/16-12 UN		X	Yes	Yes			OMT
P.t.c.	G 3/4	X			Yes	Yes			OMT
Wheel	Cyl. 40 mm	G 3/4	X		Yes	Yes			OMTW
	Tapered 45 mm	G 3/4	X		Yes	Yes			OMTW
	Tapered 1.75 in	1 1/16-12 UN		X	Yes	Yes			OMTW
Brake-Wheel	Wheel bolt flange	G 3/4	X		Yes	No	X		OMTFX
	Thread hole flange	G 3/4	X		Yes	No	X		OMTFX
Brake-standard	Cyl. 40 mm	G 3/4	X		Yes	No	X		OMTF
	Spined 1.5 in	G 3/4	X		Yes	No	X		OMTF
	Cyl. 40 mm	G 3/4	X		Yes	No	X		OMTFH
	Spined 1.5 in	G 3/4	X		Yes	No	X		OMTFH
Short	No output shaft	G 3/4	X		Yes	Yes			OMTS

Features

Features available (options)

- Speed sensor
- Motor with tacho connection
- Viton shaft seal
- Painted
- Ultra short

Code numbers

OMT code numbers

Code Numbers	Displacement [cm³]					
	160	200	250	315	400	500
1515	3000	3001	3002	3003	3004	3005
1518	2050	2051	2052	2053	2054	2055
1515	3006	3007	3008	3009	3010	3011
1518	2056	2057	2058	2059	2060	2061
1515	3012	3013	3014	3015	3016	3017
1518	2062	2063	2064	2065	2066	2067

OMT

OMT code numbers (continued)

Code Numbers	Displacement [cm ³]					
	160	200	250	315	400	500
151B	3018	3019	3020	3021	3022	3023
151B	3024	3025	3026	3027	3028	3029
151B	3030	3031	3032	3033	3034	3035
151B	2080	2081	2082	2083	2084	2085
151B	3207	3208	3209	3210	3211	3212
151B	3203	3201	3202	3203	3204	3205
151B	4000	4001	4002	4003	4004	4005
151B	4002	4006	4009	4010	4011	4012
151B	4021	4022	4023	4024	4025	4026
151B	4028	4029	4030	4031	4032	4033
151B	3036	3037	3038	3039	3040	3041

Ordering

Add the four digit prefix "151B" to the four digit numbers from the chart for complete code number.


Example:

151B3002 for an OMT 250 with standard flange, cyl. 40 mm shaft and port size G 3/4"

Orders will not be accepted without the four digit prefix.

Technical data**Maximum permissible shaft seal pressure****Motor with check valves and without use of drain connection**

The pressure on the shaft seal never exceeds the pressure in the return line.



321-300-10


Motor with check valves and with drain connection

The shaft seal pressure equals the pressure on the drain line.

OMT FX, OMT PL and OMT FH must always be fitted with drain line.

Maximum pressure in drain line is 5 bar [75 psi].

OMT

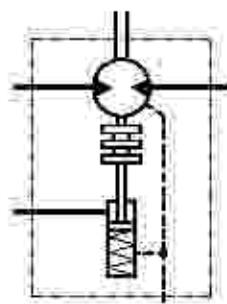


1311445.30

Maximum return pressure

The shaft seal pressure equals the pressure on the drain line.

Maximum return pressure without drain line or maximum pressure in the drain line

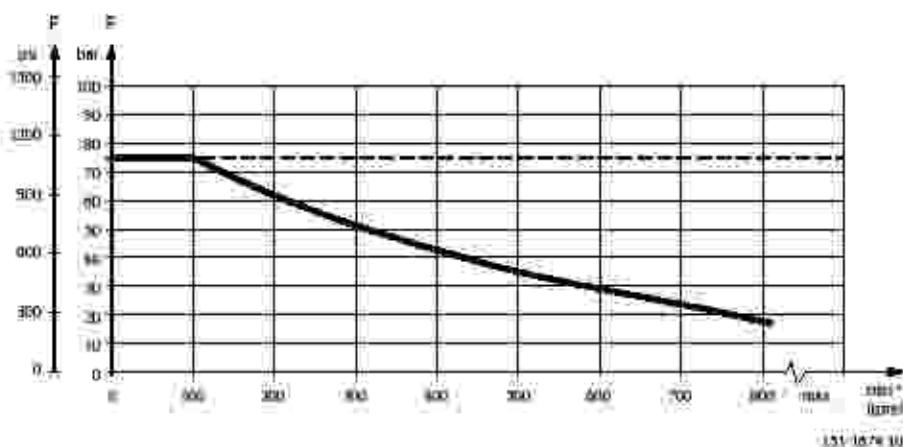

---- Intermittent operation: the permissible values may occur for max. 10% of every minute.

— Continuous operation

OMT, OMTW, OMTS, OMT FX, OMT FL and OMT FH

Technical data for OMT, OMTW, OMTS, OMT FX, OMT FL and OMT FH

Type	OMT	OMT	OMT	OMT	OMT	OMT
Motor size	160	200	250	315	400	500
Geometric displacement cm³ [in³]	161.1 [9.83]	201.4 [12.29]	251.8 [15.37]	326.3 [20.91]	410.9 [25.07]	523.6 [31.95]
Maximum speed min⁻¹ [min⁻¹]	cont. 625; 780	525; 750	500; 600	380; 460	365; 465	240; 285

OMT

Technical data for OMT, OMTW, OMTS, OMT FX, OMT FL and OMT FH (continued)

Type	OMT	OMTW	OMTS	OMT FX	OMT FL	OMT FH	OMT	OMTW	OMTS	OMT FX	OMT FL	OMT FH
Motor size	160	200	250	315	400	500	160	200	250	315	400	500
Maximum torque Nm [lb/in]	cont.	470 [160]	590 [220]	730 [260]	950 [340]	1080 [380]	1220 [460]	1370 [500]	1520 [550]	1700 [600]	1860 [650]	2020 [700]
	int. ¹⁾	560 [1960]	740 [280]	930 [330]	1140 [390]	1260 [410]	1370 [470]	1500 [530]	1680 [580]	1800 [630]	1950 [680]	2100 [730]
Maximum output kW [hp]	cont.	26.5 [35.5]	33.5 [44.9]	33.5 [44.9]	33.5 [44.9]	39.0 [49.2]	39.0 [49.2]	39.0 [49.2]	39.0 [49.2]	39.0 [49.2]	39.0 [49.2]	39.0 [49.2]
	int. ²⁾	32.0 [42.9]	40.0 [53.5]	40.0 [53.5]	40.0 [53.5]	45.0 [56.9]	45.0 [56.9]	45.0 [56.9]	45.0 [56.9]	45.0 [56.9]	45.0 [56.9]	45.0 [56.9]
Maximum pressure drop bar [psi]	cont.	200 [2900]	200 [2900]	200 [2900]	200 [2900]	180 [2610]	160 [2320]	180 [2610]	160 [2320]	180 [2610]	160 [2320]	180 [2610]
	int. ³⁾	240 [3480]	240 [3480]	240 [3480]	240 [3480]	210 [3050]	180 [2610]	210 [3050]	180 [2610]	210 [3050]	180 [2610]	210 [3050]
	peak ⁴⁾	280 [4060]	280 [4060]	280 [4060]	280 [4060]	240 [3480]	210 [3050]	240 [3480]	210 [3050]	240 [3480]	210 [3050]	240 [3480]
Maximum oil flow l/min [USgall/min]	cont.	100 [26.4]	125 [33.0]	125 [33.0]	125 [33.0]	125 [33.0]	125 [33.0]	125 [33.0]	125 [33.0]	125 [33.0]	125 [33.0]	125 [33.0]
	int. ⁵⁾	125 [33.0]	150 [39.5]	150 [39.5]	150 [39.5]	150 [39.5]	150 [39.5]	150 [39.5]	150 [39.5]	150 [39.5]	150 [39.5]	150 [39.5]
Maximum starting pressure with unloaded shaft	bar [psi]		10 [145]	10 [145]	10 [145]	10 [145]	10 [145]	10 [145]	10 [145]	10 [145]	10 [145]	10 [145]
Minimum starting torque at maximum pressure drop cont. Nm [lb/in]	at maximum pressure drop cont. Nm [lb/in]	340 [3610]	430 [4610]	530 [5550]	740 [7430]	840 [8410]	950 [9410]	1060 [10580]	1170 [11650]	1280 [12750]	1390 [13850]	1500 [14950]
	at maximum pressure drop int. ⁶⁾ Nm [lb/in]	410 [4630]	520 [5600]	630 [6580]	860 [8880]	970 [8590]	1080 [9380]	1190 [10370]	1300 [12560]	1410 [13550]	1520 [14540]	1630 [15530]

1) Intermittent operation: the permissible values may occur for max. 10% of every minute.

2) Peak load: the permissible values may occur for max. 1% of every minute.

For maximum permissible combination of flow and pressure see function diagram for actual motor.


Type			Maximum inlet pressure	Maximum return pressure with drain line
OMT, OMTW, OMTS, OMT FX, OMT FL, OMT FH	bar [psi]	cont.	210 [3050]	140 [2030]
	bar [psi]	int. ⁶⁾	250 [3630]	175 [2510]
	bar [psi]	peak ⁴⁾	300 [4350]	210 [3050]

OMT**Brake motors**

Type	Maximum pressure in drain line ³⁾	Holding torque ⁴⁾	Brake-release pressure ⁵⁾	Maximum pressure in brake line
OMT FX, OMT FL	5 bar [70 psi]	1300 Nm [10620 lbf.in]	12 bar [170 psi]	30 bar [440 psi]
OMT FH	5 bar [70 psi]	1200 Nm [10620 lbf.in]	30 bar [440 psi]	280 bar [4060 psi]

- 1) Intermittent operation: the permissible values may occur for maximum 10% of every minute.
- 2) Peak load: The permissible values may occur for maximum 1% of every minute.
- 3) Brake motors must always have a drain line. The brake-release pressure is the difference between the pressure in the brake line and the pressure in the drain line.
- 4) For the supply of motors with holding torques higher than those stated, please contact the Danfoss sales organization.

For maximum permissible combination of flow and pressure, see function diagram for actual motor.

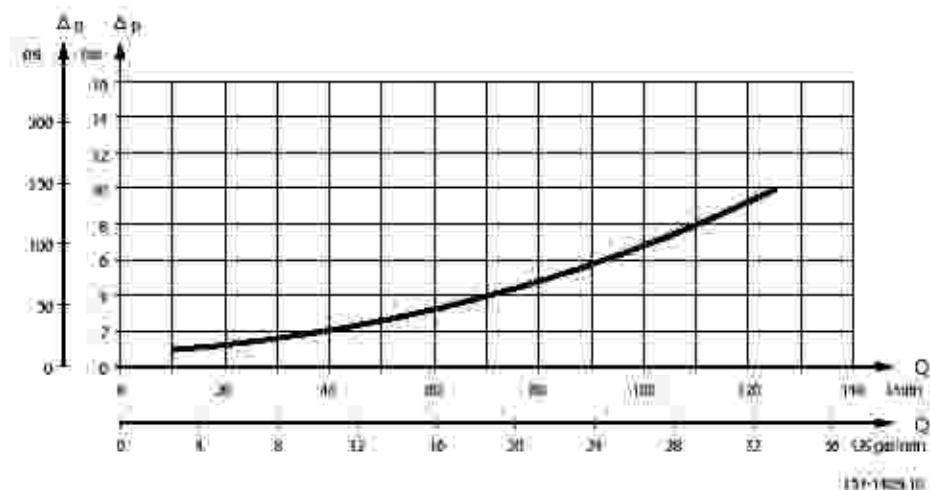
Pressure drop in motor

The curve applies to an unloaded motor shaft and an oil viscosity of 35 mm²/s [165 SUS].

Oil flow in drain line

Maximum oil flow in the drain line at a return pressure less than 5-10 bar [75-150 psi]

Pressure drop bar (psi)	Viscosity mm ² /s [SUS]	Oil flow in drain line l/min [US gal/min]
140 (2030)	20 [100]	2.5 [0.66]
	35 [165]	1.5 [0.40]
210 (3050)	20 [100]	5.0 [1.32]
	35 [165]	3.0 [0.79]

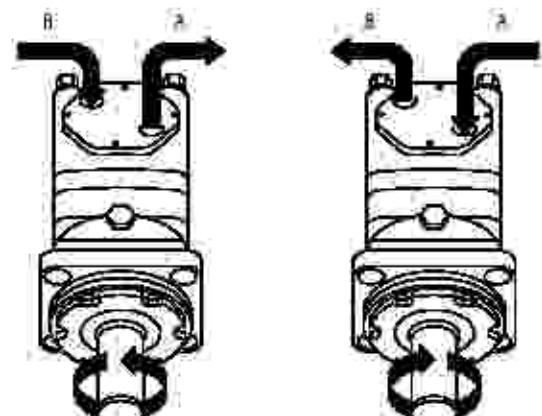OMT**Direction of shaft rotation**


E31-1150-10

Permissible shaft loads for OMT***Mounting flange:***

Standard

Shaft:

All shaft types

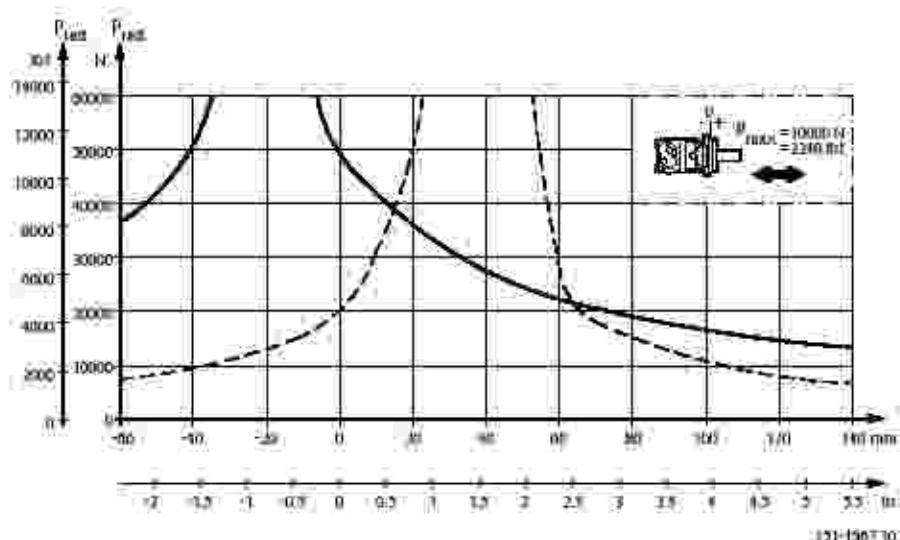
***Mounting flange:***

Wheel

Shaft:

All shaft types

OMT

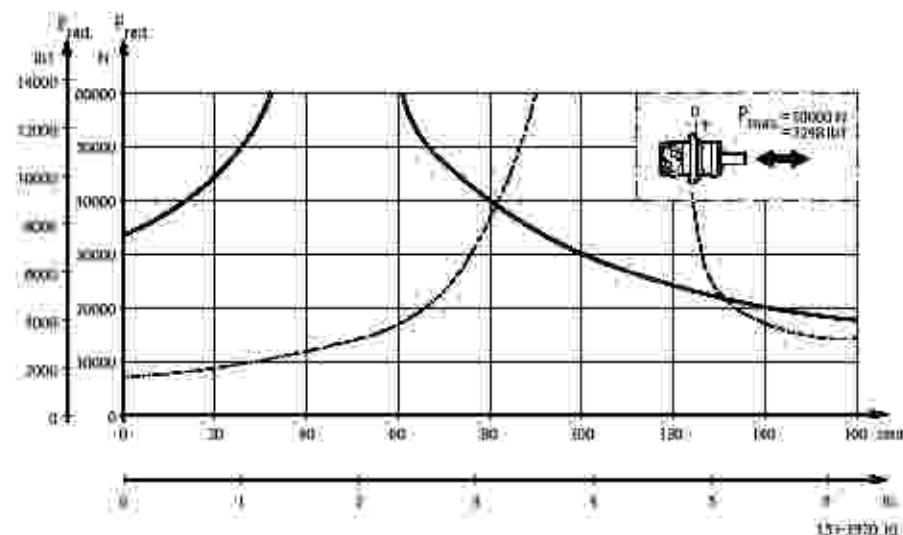

The output shaft runs in tapered roller bearings that permit high axial and radial forces.

The permissible radial load on the shaft is shown for an axial load of 0 N as a function of the distance from the mounting flange to the point of load application.

The curve is based on B10 bearing life (2000 hours or 12,000,000 shaft revolutions at 100 min^{-1}) at rated output torque, when mineral-based hydraulic oil with a sufficient content of anti-wear additives, is used.

For 3,000,000 shaft revolutions or 500 hours – increase these shaft loads with 52%.

The dash curve shows maximum radial shaft load. Any shaft load exceeding the values shown in the curve will involve a risk of breakage.

Bearing life calculations can be made using the explanation and formulae provided in the chapter "Bearing dimensioning" in the technical information "General Orbital motors" 520L0232.


Mounting flange:

Brake-wheel

Shaft:

All shaft types


OMT

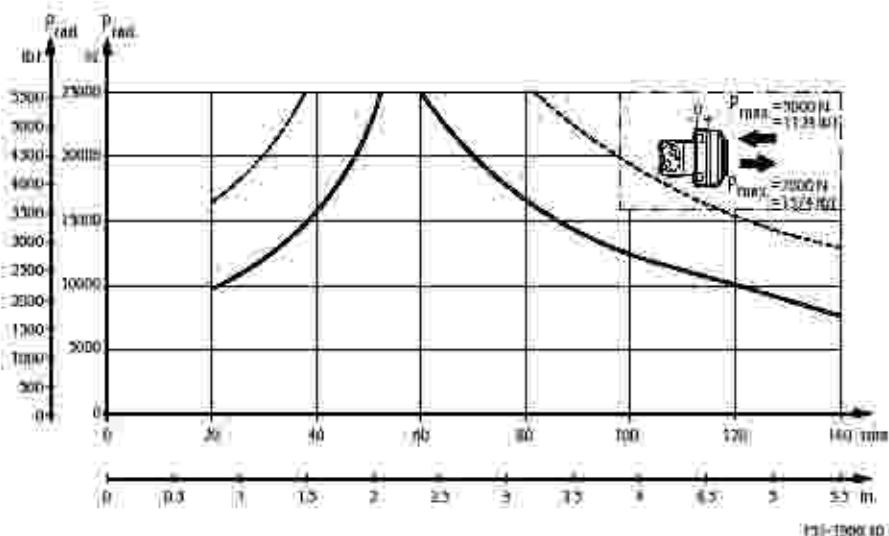**Mounting flange:**

Brake-standard

Shaft:

All shaft types

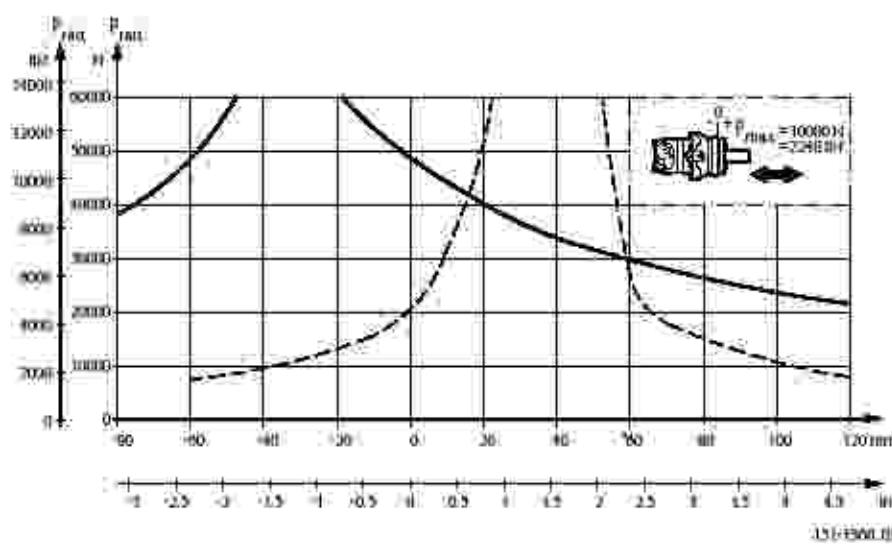

The output shaft runs in tapered roller bearings that permit high axial and radial forces.

The permissible radial load on the shaft is shown for an axial load of 0 N as a function of the distance from the mounting flange to the point of load application.

The curve is based on 810 bearing life (2,000 hours or 12,000,000 shaft revolutions at 100 min⁻¹) at rated output torque, when mineral-based hydraulic oil with a sufficient content of anti-wear additives, is used.

For 3,000,000 shaft revolutions or 500 hours - increase these shaft loads with 52%.

The dash curve shows max. radial shaft load. Any shaft load exceeding the values shown in the curve will involve a risk of breakage.



OMT

Bearing life calculations can be made using the explanation and formula provided in the chapter "Bearing dimensioning" in the technical information "General Orbital motors" 520L0232.



Function diagrams

Continuous range



Intermittent range (maximum 10% operation every minute)

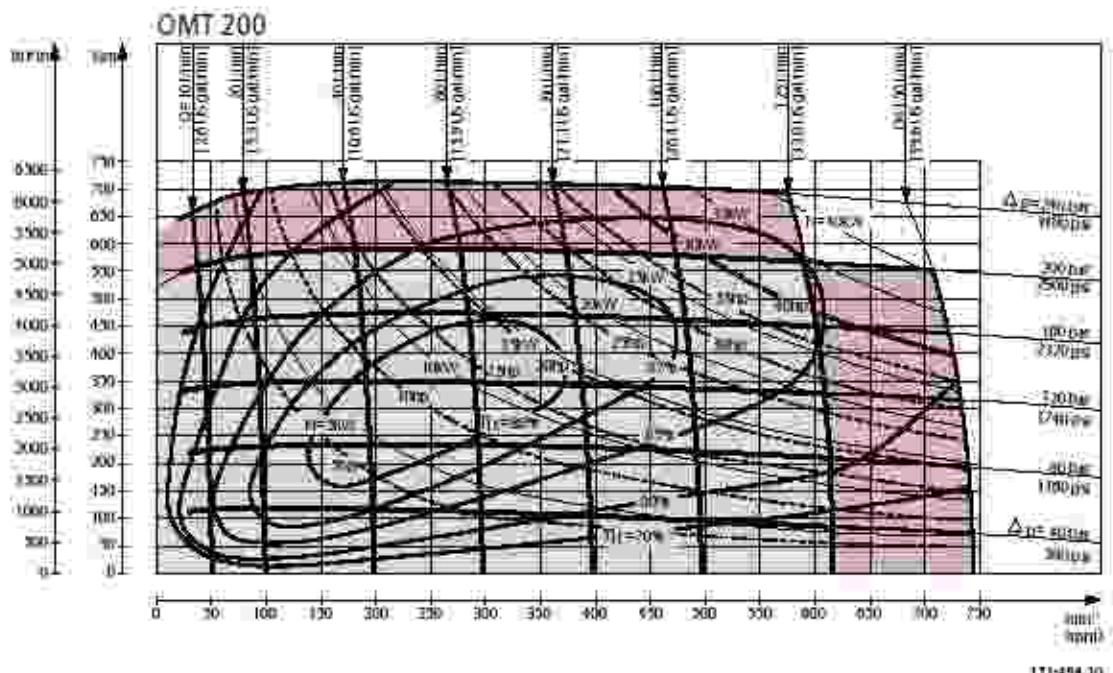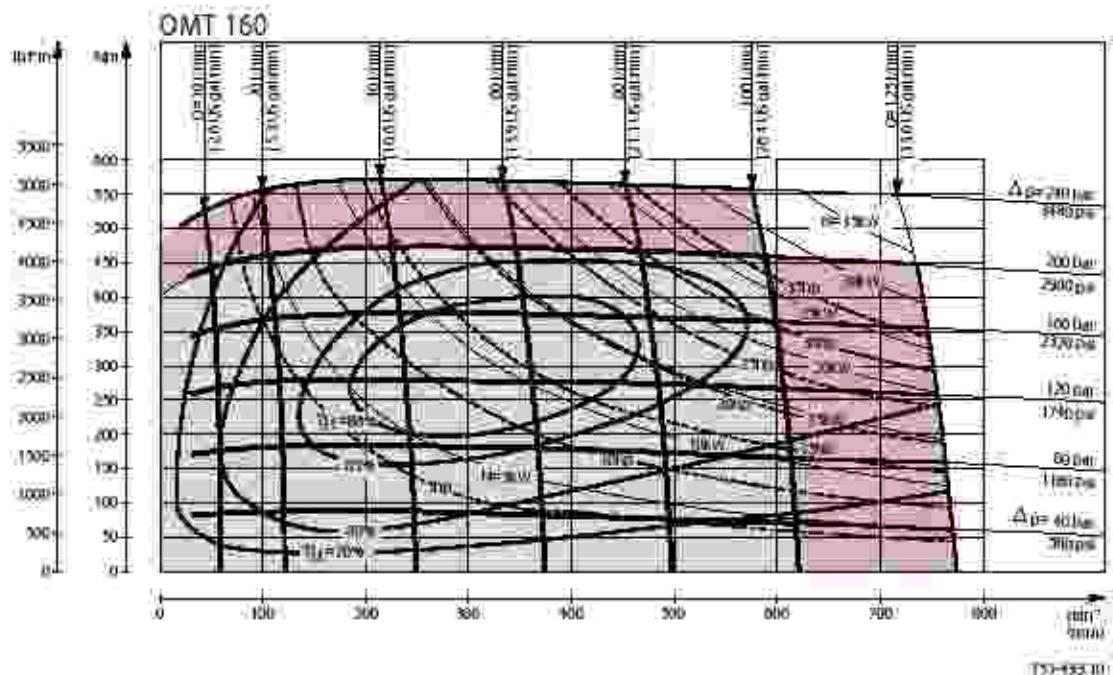

OMT

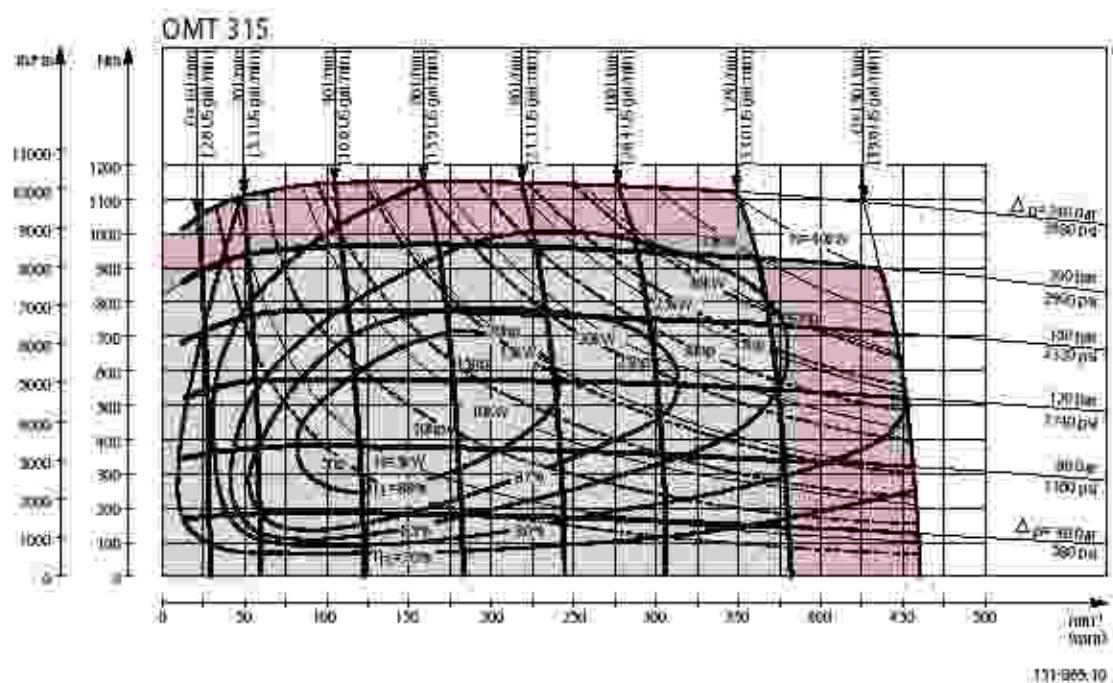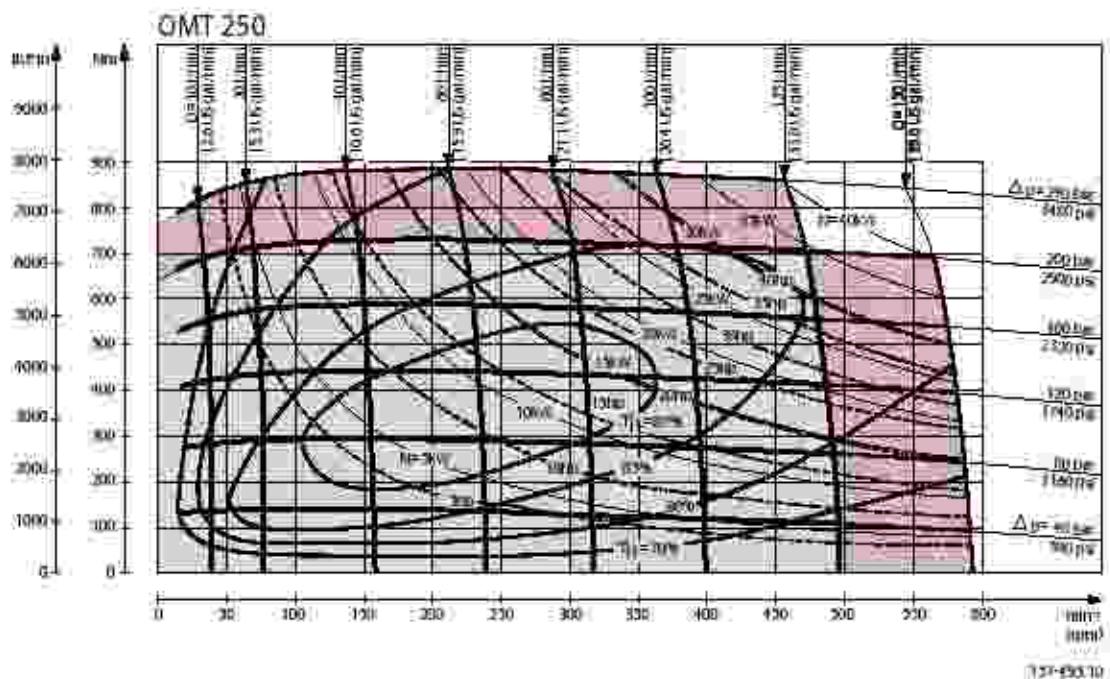

OMT

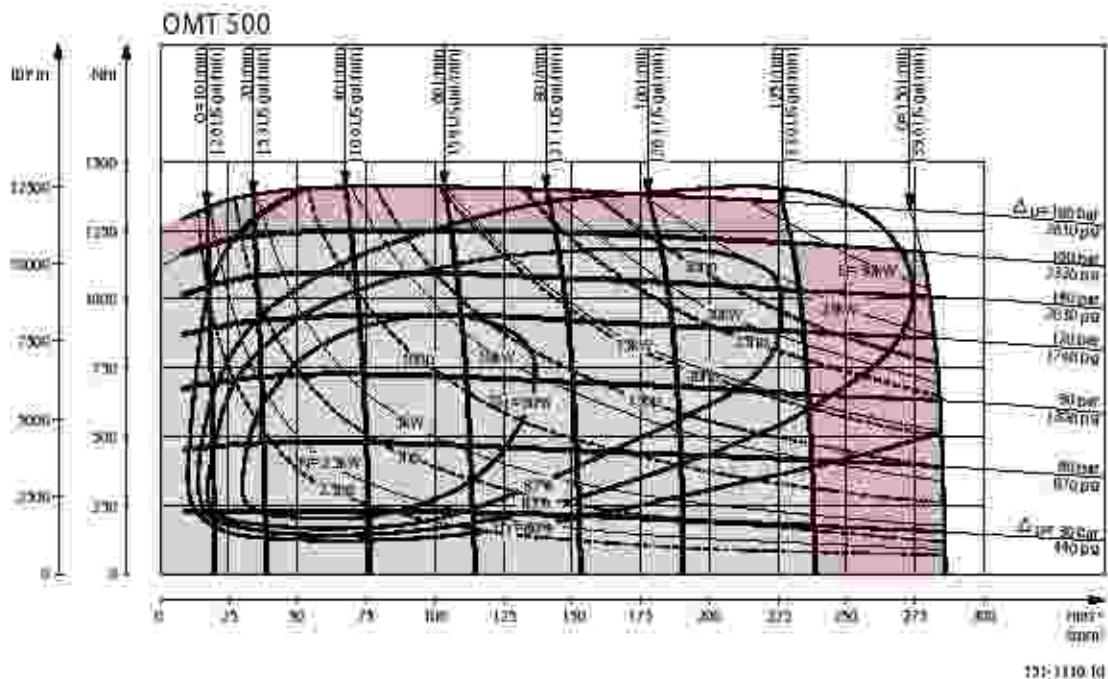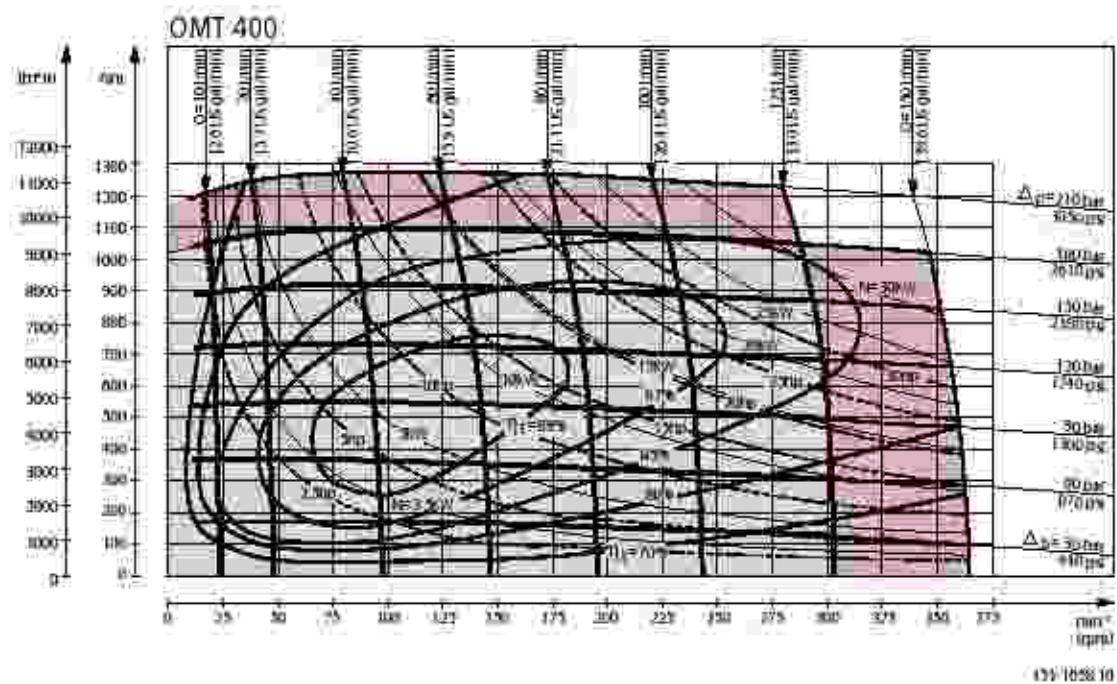
**Function diagram use**

Explanation of function diagram use, basis and conditions: see [Speed, torque and output](#) on page 7.

Intermittent pressure drop and oil flow must not occur simultaneously.

OMT

Shaft version

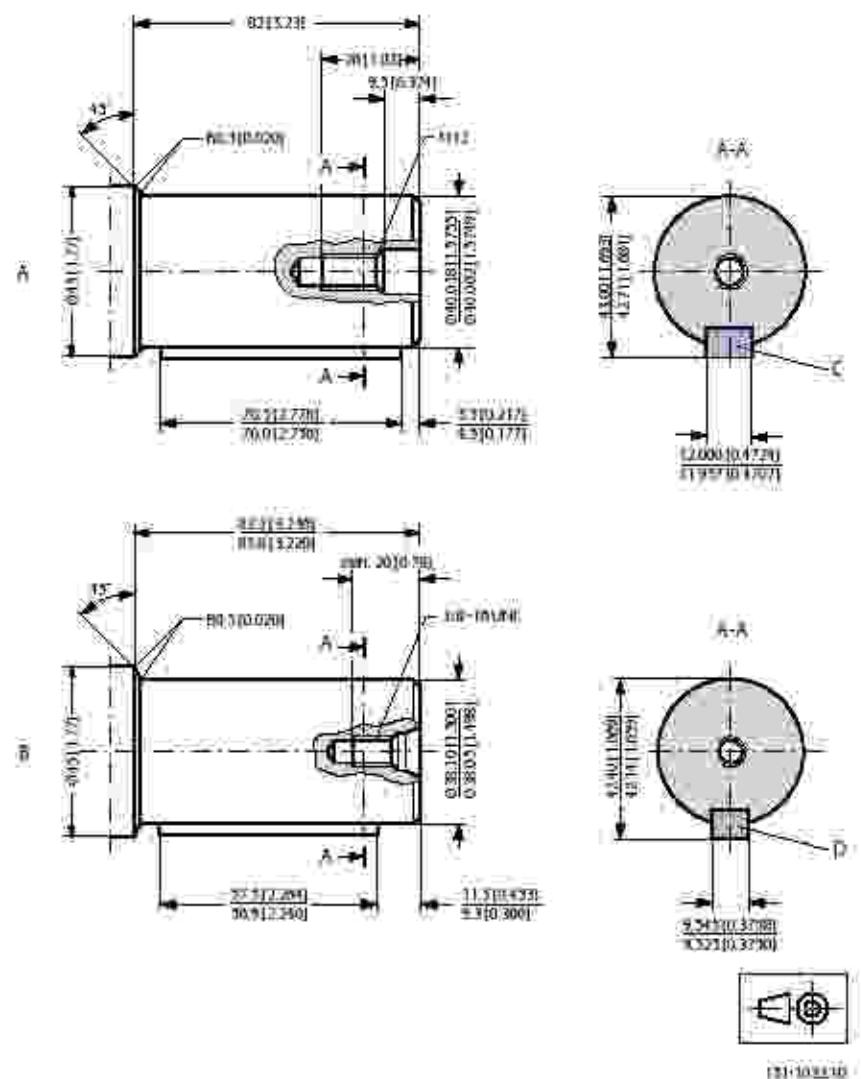**A** Cylindrical 40 mm shaft:**C** Parallel key

A12 x 8 x 70

DIN 6885

Keyway deviates from standard.


B Cylindrical 1.5 in shaft:**D** Parallel key

3/8 x 3/8 x 2 1/4 in

B.S.46

Keyway deviates from standard


OMT

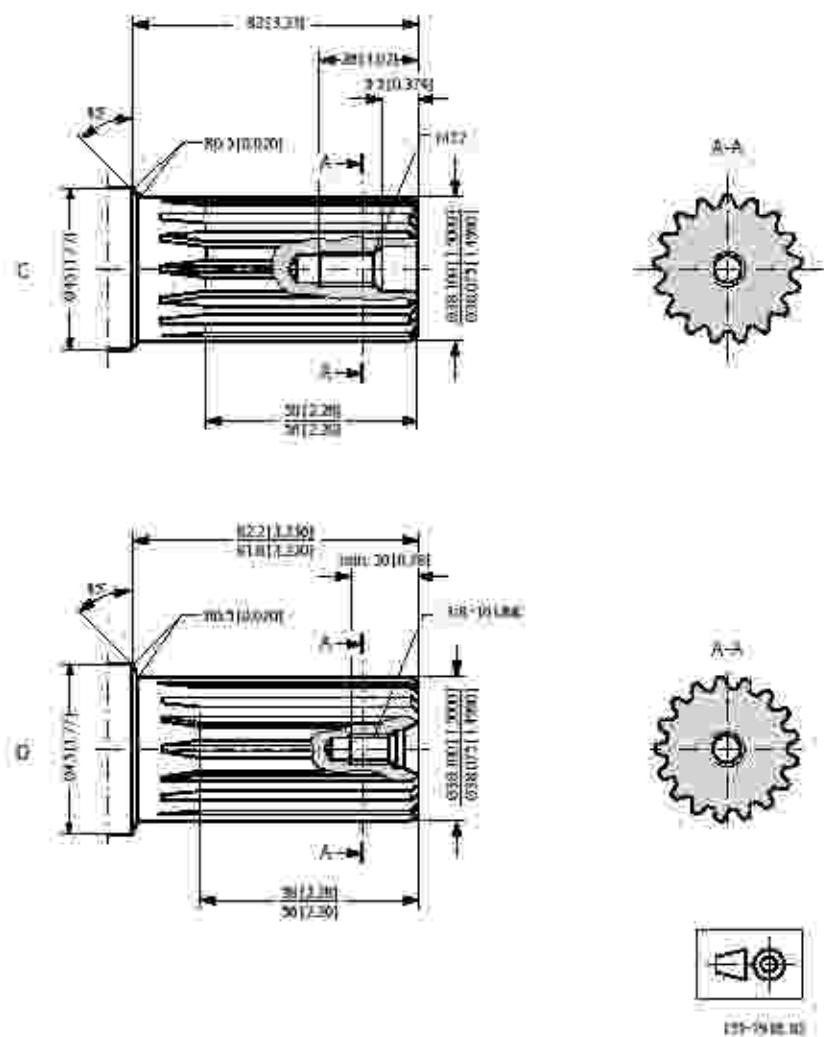

C Involute splined shaft
ANS B92.1- 1970 standard:
Flat root side fit
Pitch 12/24
Teeth 17
Major diameter 1.50 in
Pressure angle 30°

D US version
Involute splined shaft
ANS B92.1- 1970 standard
Flat root side fit
Pitch 12/24
Teeth 17
Major diameter 1.50 in
Pressure angle 30°

OMT

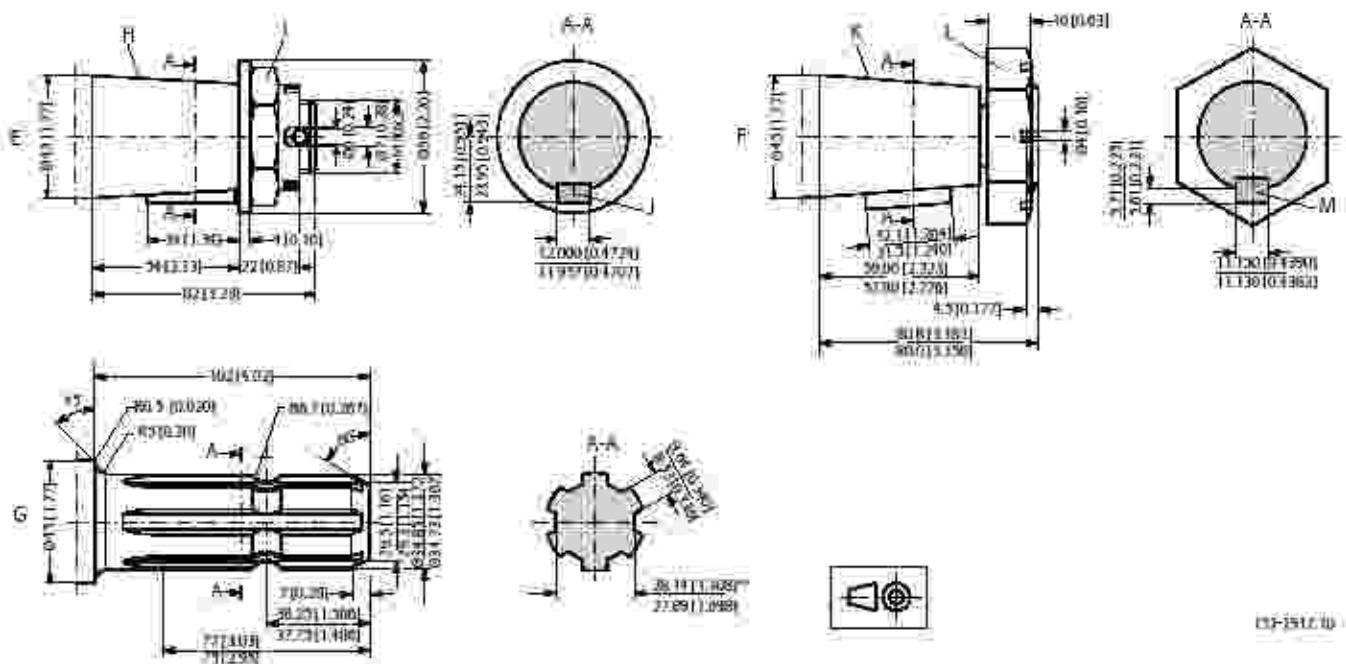**E** Tapered 45 mm shaft (ISO/R775)**I** DIN 932

Across flats: 46 mm

Tightening torque: 500 ± 30 Nm (4430 ± 270 lbft)

H Taper 1:10**J** Parallel key

812 × 8 × 28

DIN 6885

Keyway deviates from standard

F Tapered 1.75 in shaft**K** Cone 1:8

SAE J501

L 1 1/4 - 18 UNEF

Across flats 2 3/16 in

Tightening torque: 500 ± 10 Nm (4425 ± 90 lbft)

M Parallel key

7/16 × 7/16 × 1 1/4

B.S.46

Keyway deviates from standard


G P.t.o. shaft

DIN 9611 Form 't' (ISO/R500 without pin hole)

* Deviates from DIN 9611

OMT

Port thread versions

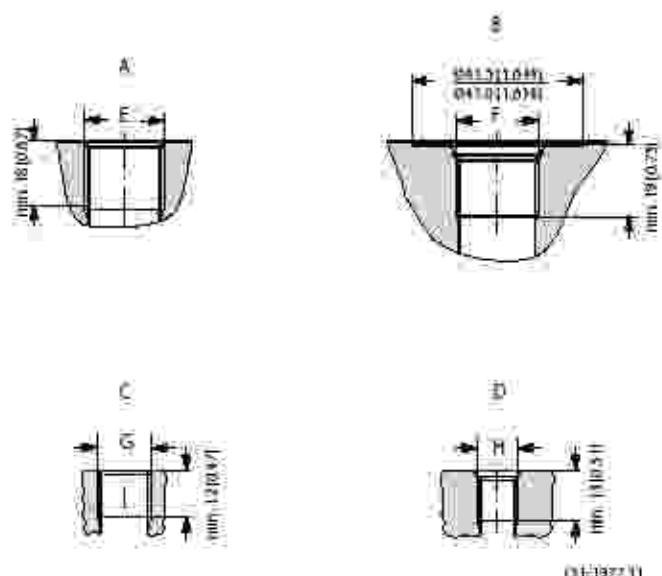


- A** G main ports:
E ISO 228/1 - G3/4
O-ring boss port
- C** G:drain port:
G ISO 228/1 - G1/4
O-ring boss port:

- B** UN main ports:
F 1 1/16 - 12 UN
- D** UNF:drain port:
H 9/16 - 18 UNF

OMT

Dimensions

Standard flange—European version

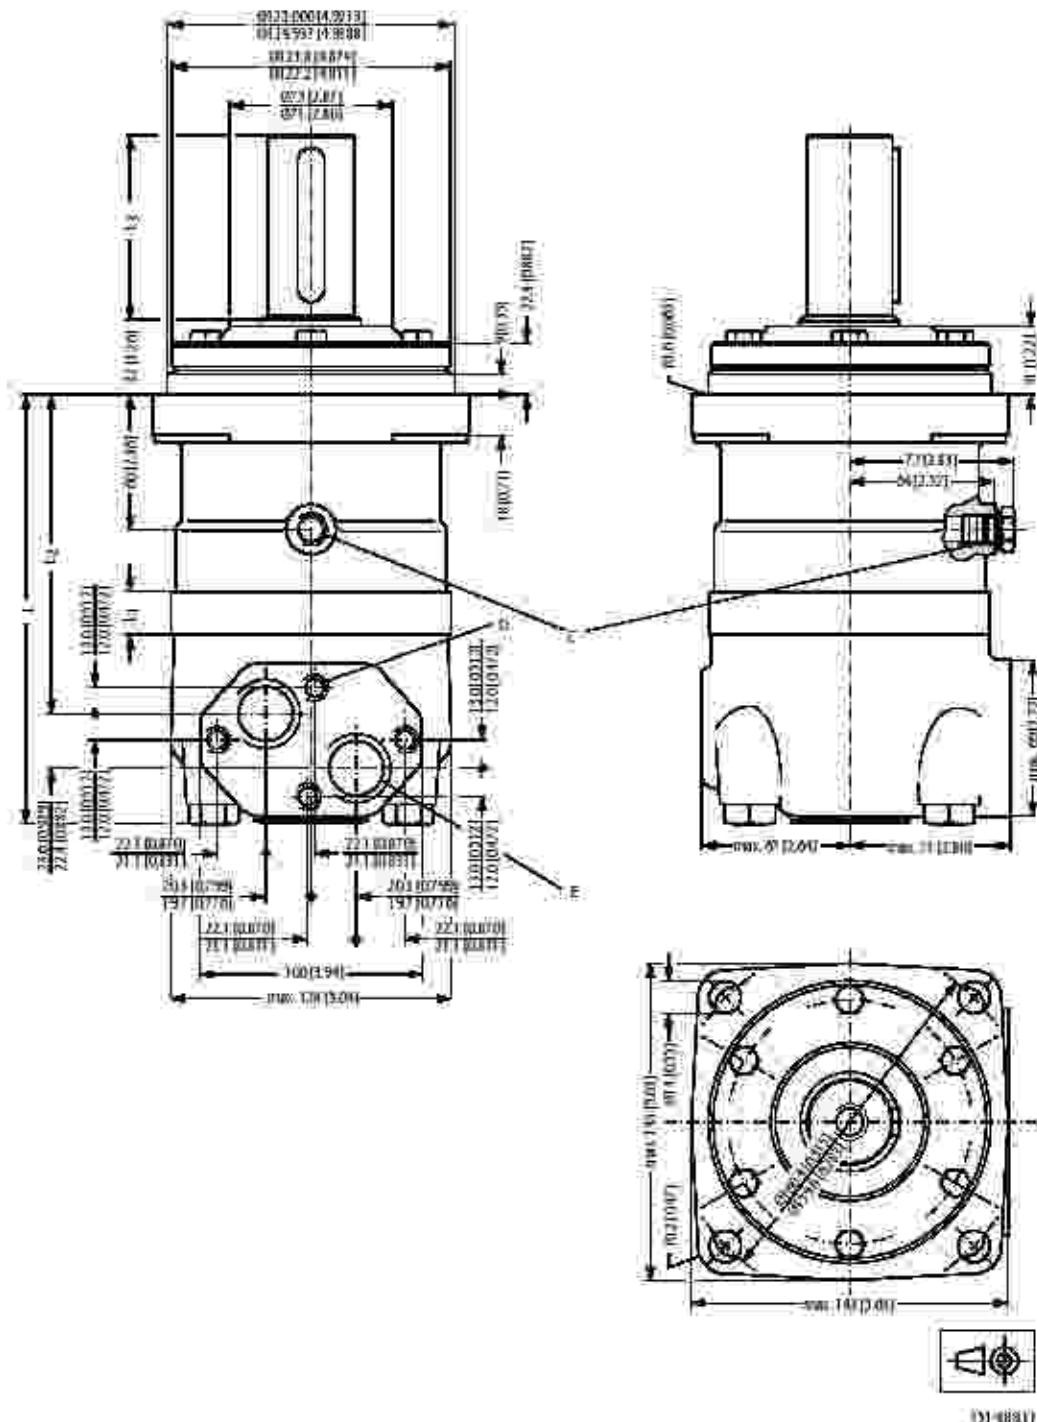

C Drain connection
G 1/4: 12 mm [0.47 in] deep

D: M10x1.00 mm [0.39 in] deep

E: G 3/4 T7 mm [0.67 in] deep

OMT


Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMT 160	190 [7.48]	165 [6.50]	140 [5.51]
OMT 200	195 [7.68]	215 [8.46]	145 [5.71]
OMT 250	201 [7.91]	278 [1.094]	151 [5.94]
OMT 315	211 [8.31]	37.0 [1.457]	161 [6.34]
OMT 400	221 [8.70]	47.5 [1.870]	171 [6.73]
OMT 500	235 [9.25]	51.5 [2.021]	185 [7.28]

* The gearwheel set is 3.5 mm [0.138 in] wider across the rollers than the L1 dimensions.

Output shaft	L ₃ mm [in]
All shafts except P.t.o. shaft	max 82 [3.23]
P.t.o. shaft	max 102 [4.02]

OMT

Standard flange—US version

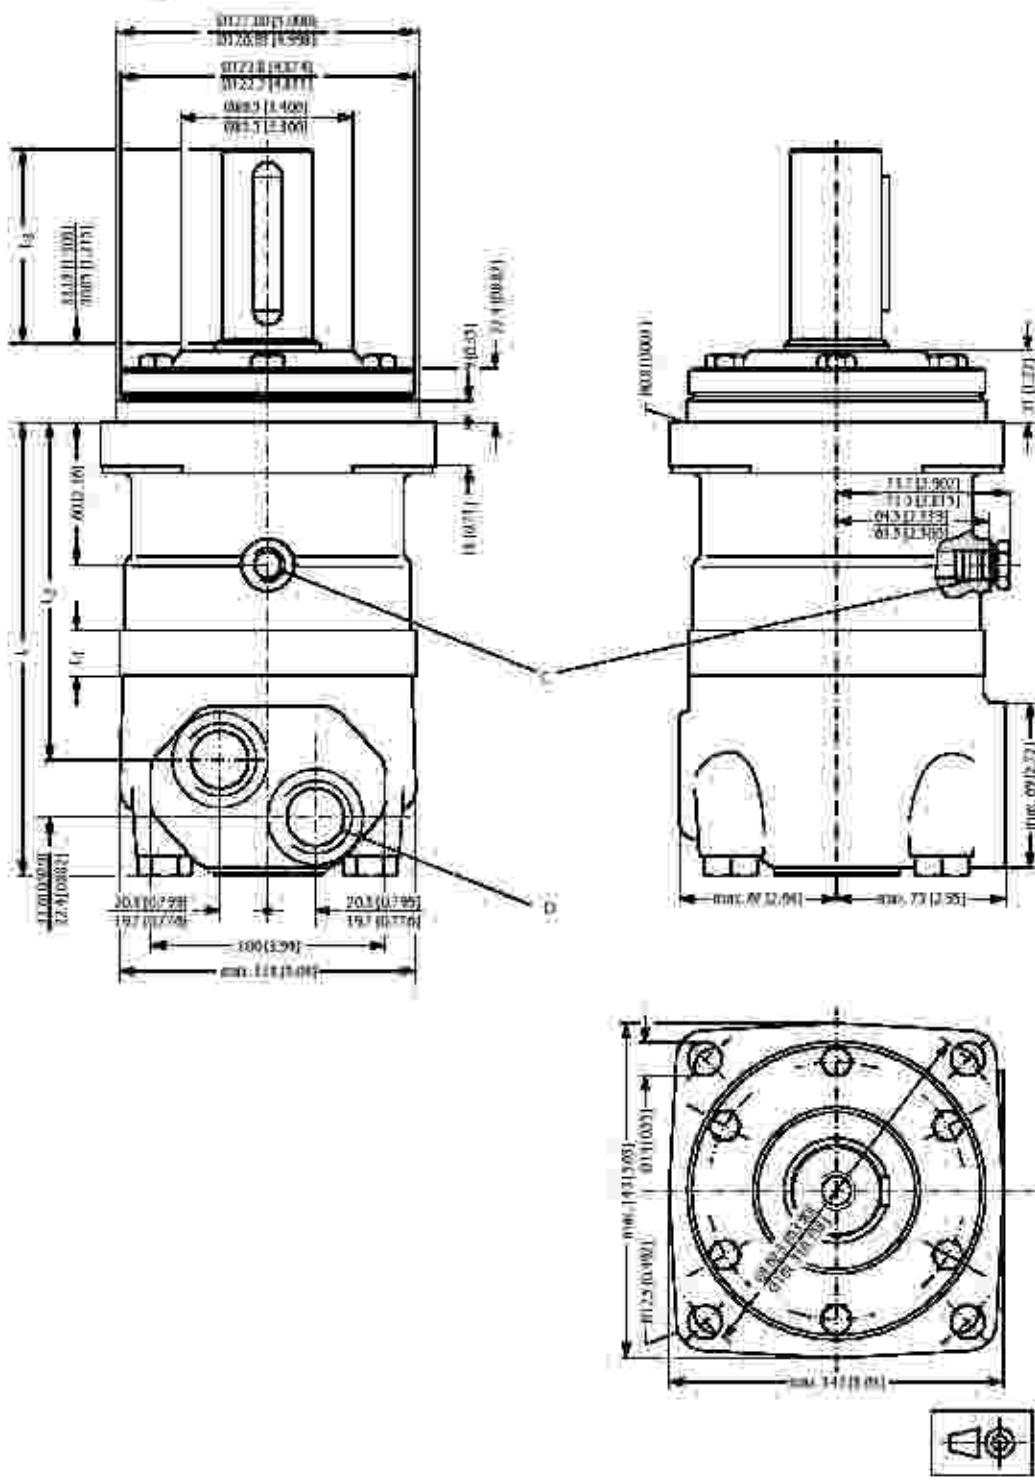

C: Drain connection 9/16-18 UNF; 13 mm [0.51 in] deep O-ring boss port

D: 1 1/16-12 UN; 19 mm [0.75 in] deep O-ring boss port

151-049122

OMT


Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMT 160	190 [7.48]	165 [6.50]	140 [5.51]
OMT 200	195 [7.68]	215 [8.46]	145 [5.71]
OMT 250	201 [7.91]	278 [10.94]	151 [5.94]
OMT 315	211 [8.31]	37.0 [1.457]	161 [6.34]
OMT 400	221 [8.70]	47.5 [1.870]	171 [6.73]
OMT 500	235 [9.25]	51.5 [2.021]	185 [7.28]

* The gearwheel set is 3.5 mm [0.138 in] wider across the rollers than the L1 dimensions.

Output shaft	L ₃ mm [in]
Cyl. 1.5 in Spline 1.5 in	82 [3.23]
Tapered 1.75 in	80.4 [3.17]

OMT

Wheel—European version

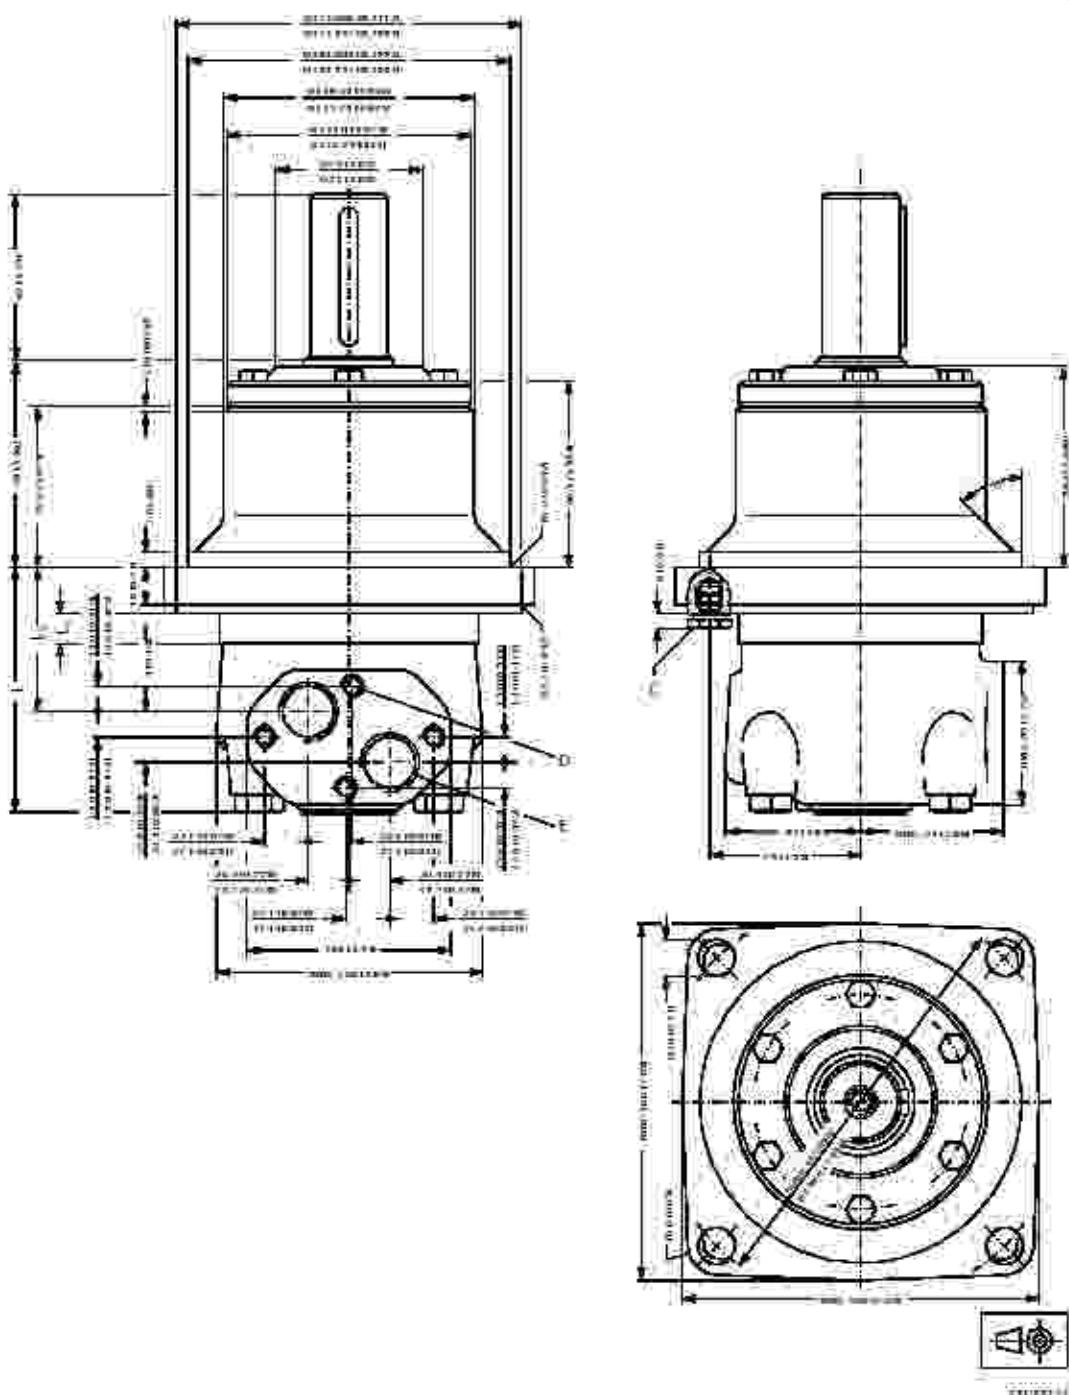

C: Drain connection
G 1/4" 12 mm [0.47 in] deep

D: M10, 10 mm [0.39 in] deep

E: G 3/4" 17 mm [0.67 in] deep

Type	$L_{max} \text{ mm [in]}$	$L_1 \text{ mm [in]}$	$L_2 \text{ mm [in]}$
OMTW 160	123 [4.84]	16.5 [0.650]	73 [2.97]
OMTW 200	128 [5.04]	21.5 [0.846]	78 [3.07]


OMT

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMTW 250	134 [5.26] [*]	37.8 [1.494]	84 [3.31]
OMTW 315	144 [5.67]	37.0 [1.457]	94 [3.70]
OMTW 400	154 [6.06]	47.5 [1.870]	104 [4.09]
OMTW 500	168 [6.61]	61.5 [2.421]	118 [4.65]

^{*}The gearwheel set is 3.5-mm [0.138-in] wider across the rollers than the L1 dimensions.

OMT

Wheel—US version

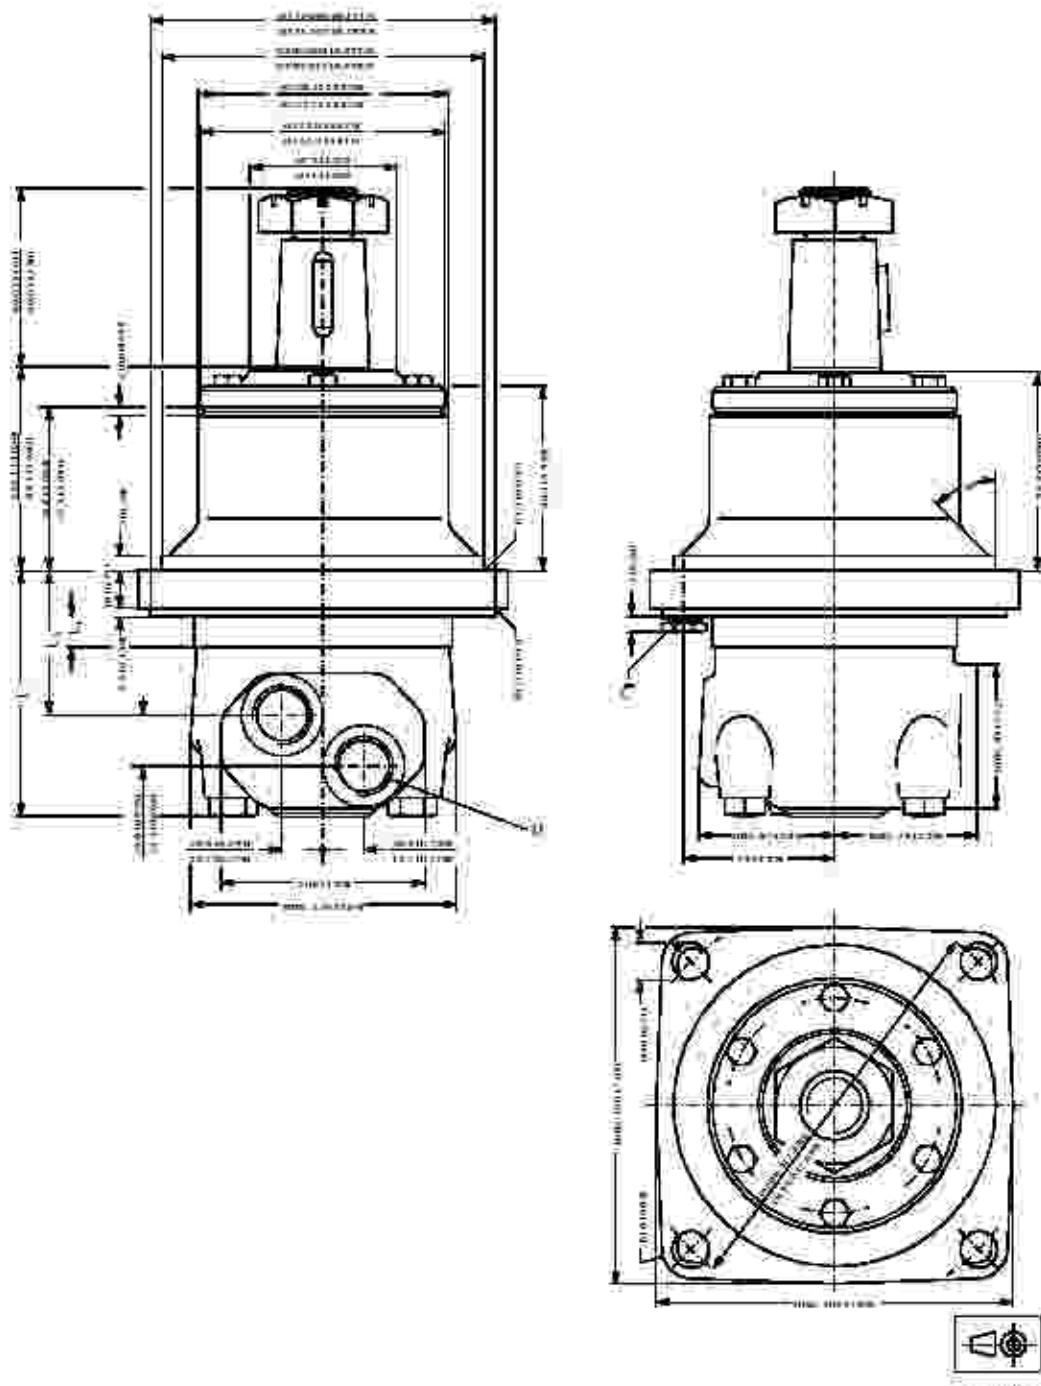

C: Drain connection
9/16-18 UNF
13 mm [0.51 in] deep
O-ring boss port

D: 1 116-12 UN
19 mm [0.75 in] deep
O-ring boss port


OMT

Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMTW 160	123 [4.84]	56.5 [2.250]	73 [2.87]
OMTW 200	128 [5.04]	71.5 [2.846]	78 [3.07]
OMTW 250	134 [5.28]	77.8 [3.094]	84 [3.31]
OMTW 315	144 [5.67]	97.0 [3.857]	94 [3.70]
OMTW 400	154 [6.06]	117.5 [4.620]	104 [4.09]
OMTW 500	168 [6.61]	151.5 [5.942]	118 [4.65]

* The gearwheel set is 3.5-mm [0.138-in] wider across the rollers than the L1 dimensions.

OMT

Brake-wheel—European version

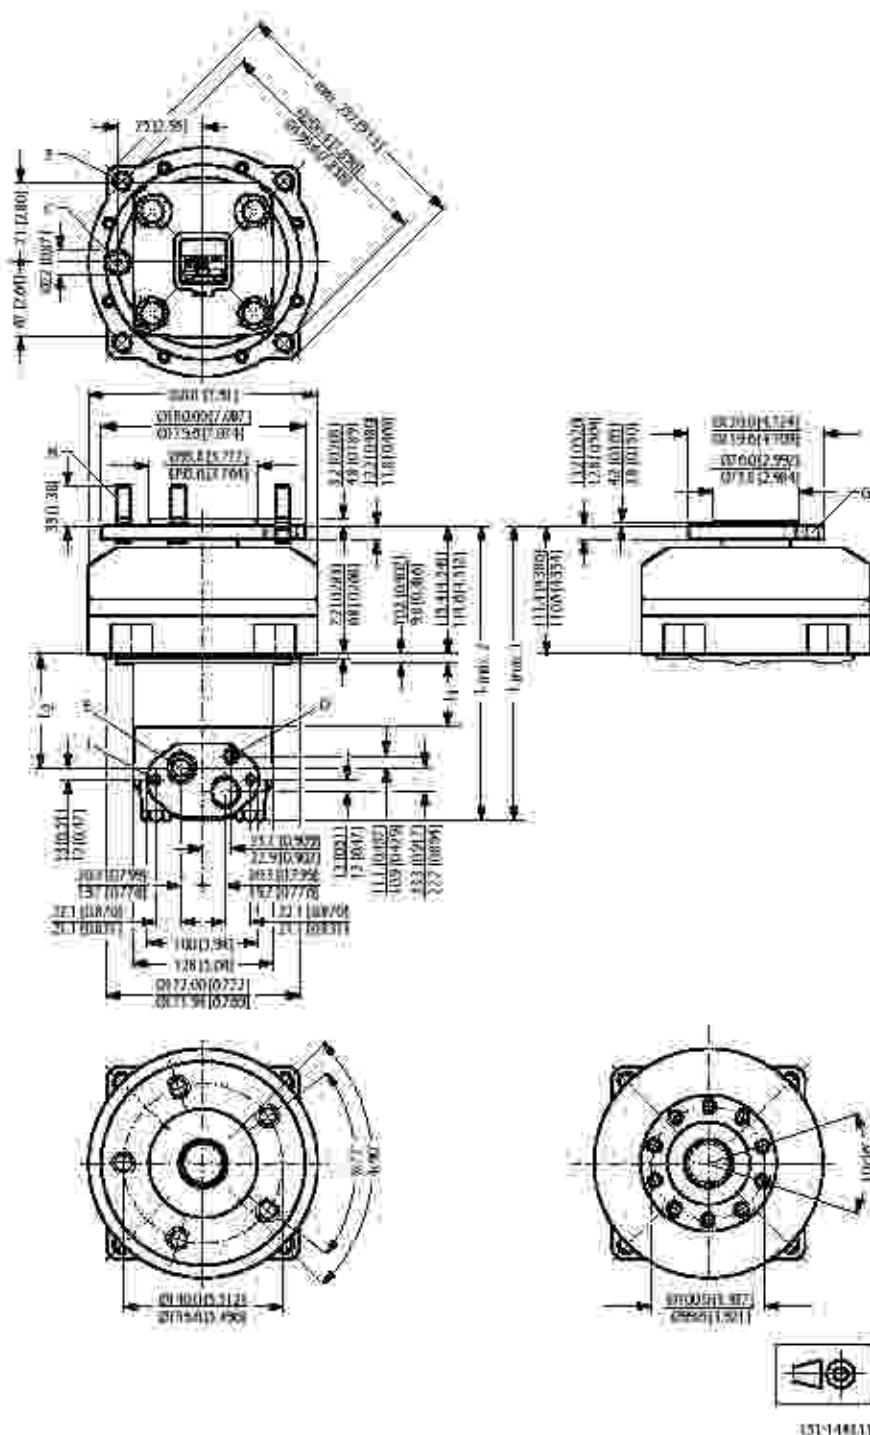

C: Brake-release port G 1/4; 12 mm
(0.47 in) deep (EN ISO 228/1)

G: 10 x M12

D: Drain connection G 1/4; 12 mm
(0.47 in) deep

H: Wheel bolts 5 x M14 x 15

E: G 3/4; 17 mm (0.67 in) deep

I: M10; 10 mm (0.39 in) deep

F: 4 x M12; 27 mm (1.06 in) deep


OMT

Type	L _{max1} mm [in]	L _{max2} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMT 160-FX	223 [8.78]	227 [8.94]	16.5 [0.650]	62 [2.45]
OMT 200-FX	239 [9.38]	232 [9.13]	21.5 [0.846]	67 [2.65]
OMT 250-FX	234 [9.21]	238 [9.37]	27.8 [1.094]	74 [2.89]
OMT 315-FX	243 [9.57]	247 [9.72]	37.0 [1.457]	83 [3.26]
OMT 400-FX	254 [10.00]	258 [10.16]	47.5 [1.870]	93 [3.67]
OMT 500-FX	268 [10.55]	272 [10.71]	51.5 [2.423]	107 [4.22]

* The gearwheel set is 3.5 mm [0.138 in] wider across the roller(s) than the L₁ dimensions.

OMT

Brake-standard—European version

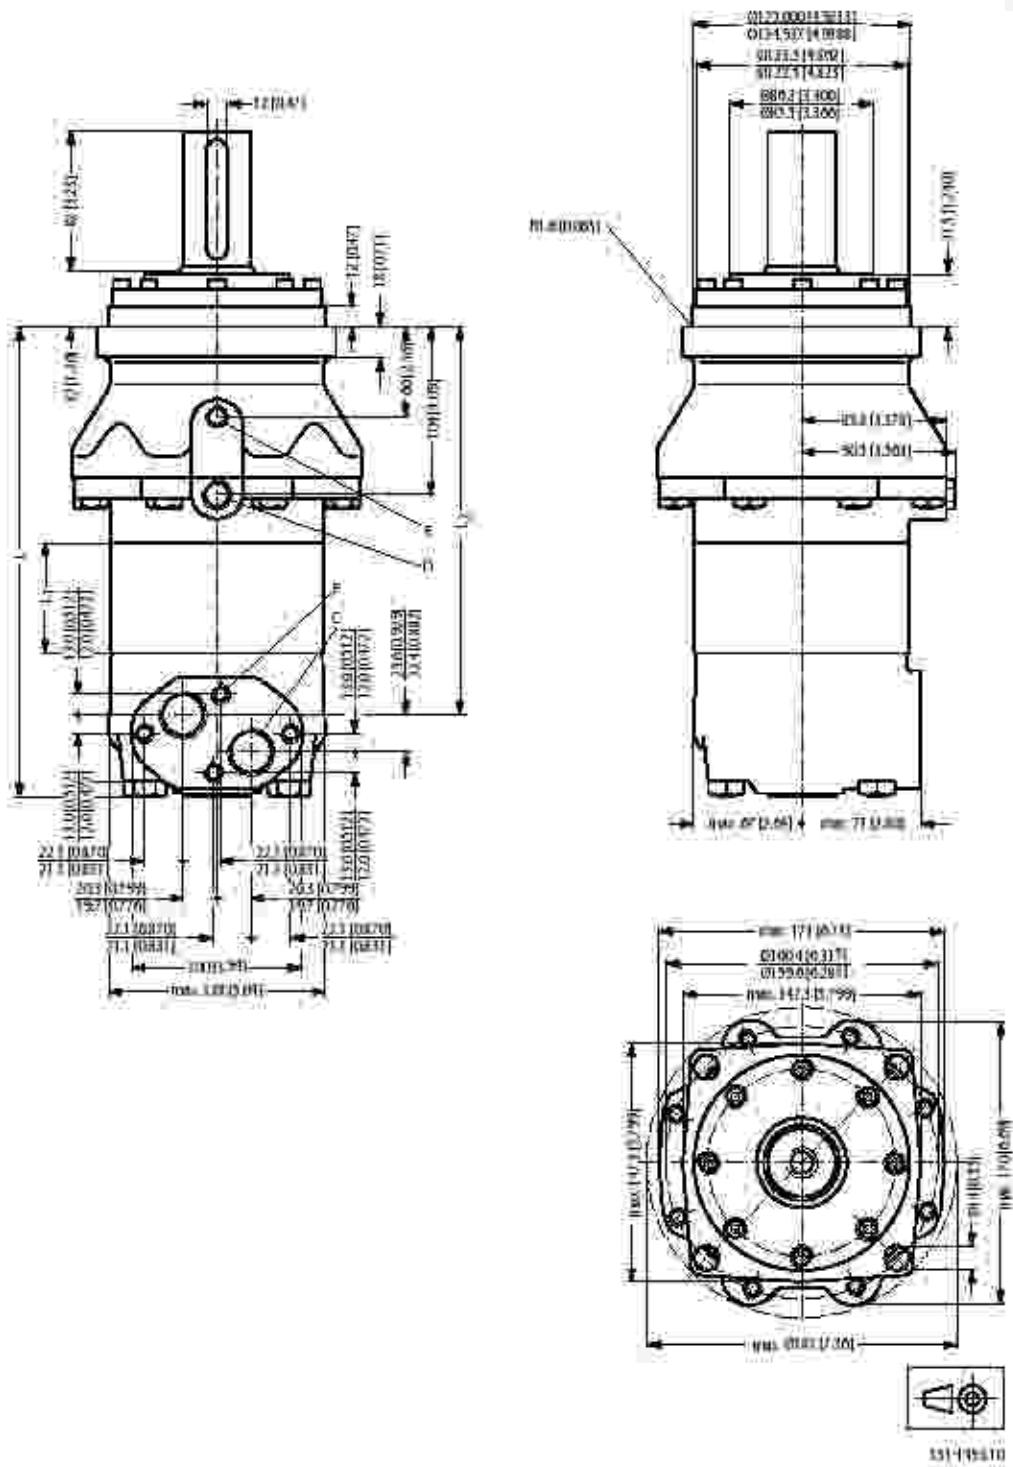

C: G 3/8; 17 mm [0.67 in]
deep (BS/ISO 228/1)

D: Drain connection G 3/8;
14 mm [0.55 in] deep

E: Brake-release port G 1/4;
12 mm [0.47 in] deep


F: M10; 10 mm [0.39 in]
deep

OMT

Type	L_{max} mm [in]	L_1 mm [in]	L_2 mm [in]
OMT 160 FL/FH	228 [9.00]	165 [6.50]	128 [5.01]
OMT 200 FL/FH	233 [9.17]	215 [8.46]	183 [7.20]
OMT 250 FL/FH	239 [9.41]	278 [10.94]	189 [7.44]
OMT 315 FL/FH	248 [9.76]	370 [14.57]	192 [7.53]
OMT 400 FL/FH	259 [10.20]	475 [18.70]	209 [8.23]
OMT 500 FL/FH	273 [10.73]	515 [20.21]	223 [8.78]

* The gearwheel set is 3.5 mm [0.138 in] wider across the rollers than the L_1 dimensions.

Short—European version

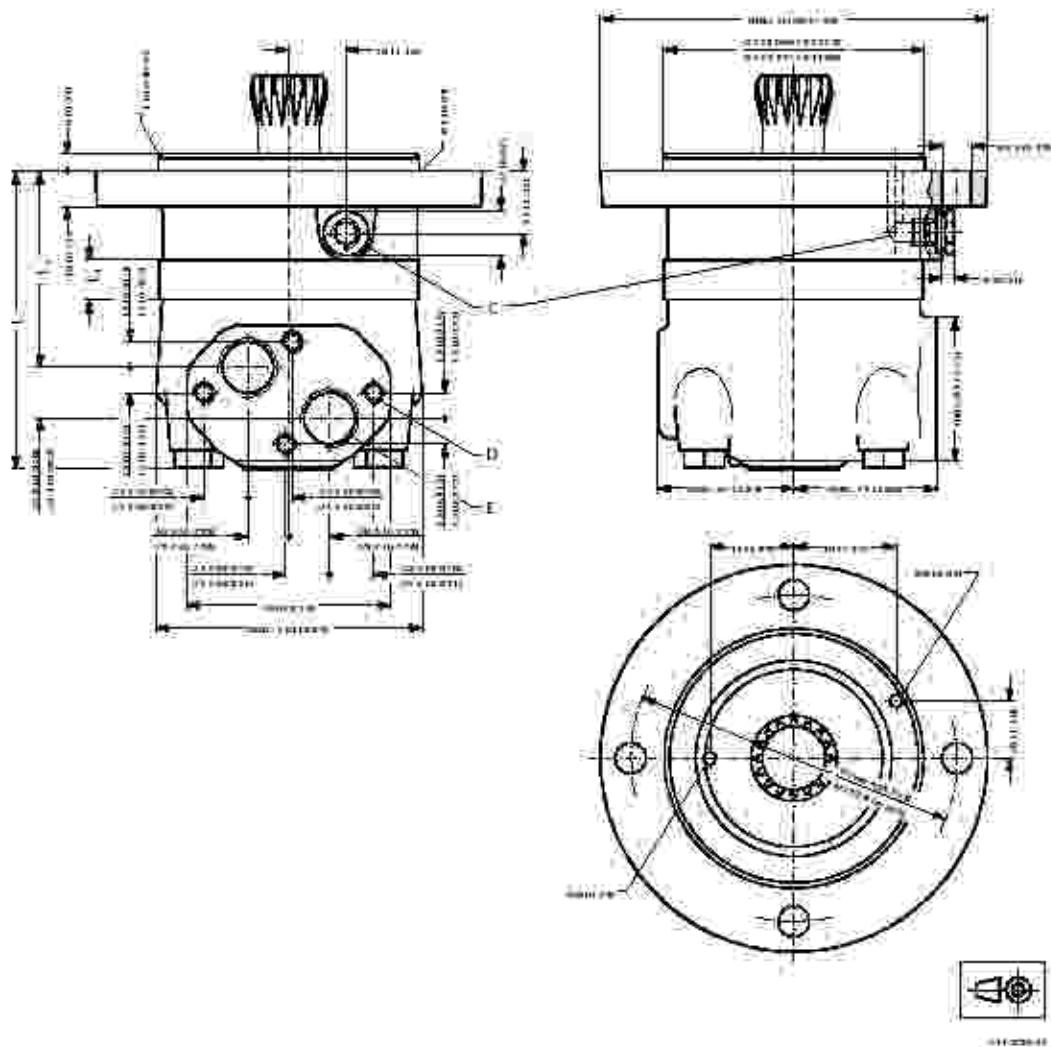

C: Drain connection G 1/4; 12 mm [0.47 in] deep

D: M10x10 mm [0.39 in] deep E: G 3/4; 17 mm [0.67 in] deep

Type	L_{max} mm [in]	L_1 mm [in]	L_2 mm [in]
OMTS 160	146 [5.75]	103 [0.650]	96 [3.78]
OMTS 200	151 [5.94]	215 [8.46]	101 [3.98]

OMT

Type	L_{max} mm [in]	L_1 mm [in]	L_2 mm [in]
OMTS-250	157 [6.18]	27.8 [1.094]	107 [4.21]
OMTS-315	166 [6.54]	37.0 [1.457]	116 [4.57]
OMTS-400	177 [6.97]	47.5 [1.870]	127 [5.00]
OMTS-500	191 [7.52]	61.5 [2.421]	142 [5.59]

* The gearwheel set is 3.5 mm [0.138 in] wider across the rollers than the L1 dimensions.

OMTS**Installation**

The cardan shaft of the OMTS motor acts as an "output shaft". Because of the movement of the shaft, no seal can be fitted at the shaft output.

Internal oil leakage from the motor will therefore flow into the attached component.

During start and operation it is important that the spline connection and the bearings in the attached component receive oil and are adequately lubricated. To ensure that the spline connection receives sufficient oil, a conical sealing ring between the shaft of the attached component and the motor intermediate plate is recommended. This method is used in the OMT.


The conical sealing ring (code no. 63389022) is supplied with the motor.

To ensure that oil runs to the bearings and other parts of the attached component, the stop plate must have a hole in it (see fig. below).

We recommend an O-ring between motor and attached component. The O-ring (code no. 15181040) is supplied with the motor. If motor and attached component have been separated, remember to refill before starting up. Fill the oil through the drain connection.

Attached component dimensions

OMTS dimensions of the attached component in millimeter [inches]

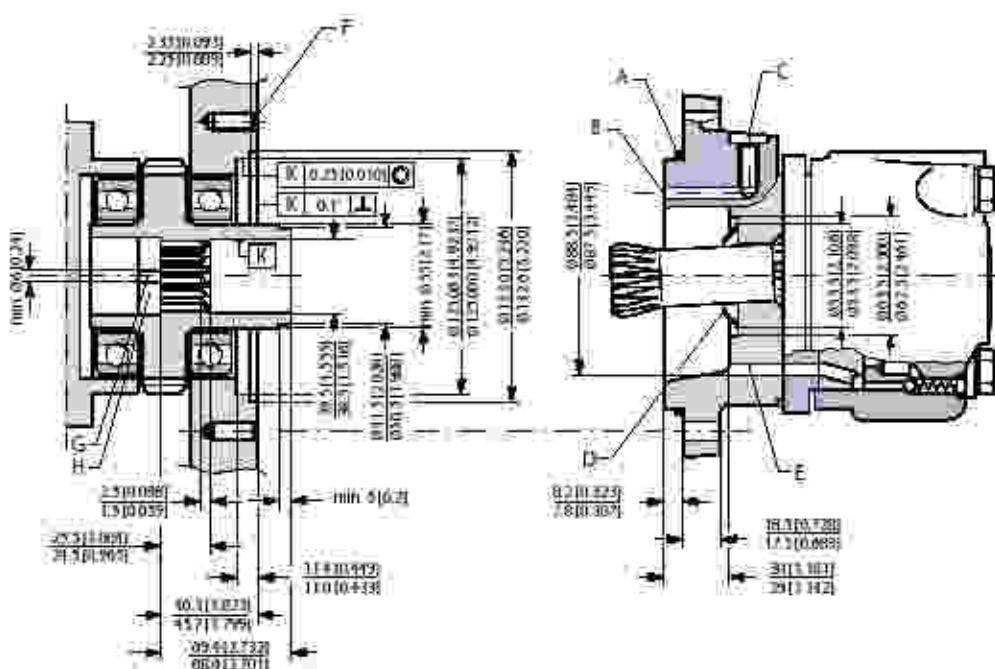

OMT

A	Dring: 125 x 3 mm	B	External drain channel
C	Drain connection: G 1/4; 12 mm [0.47 in] deep	D	Conical seal ring
E	Internal drain channel	F	M12; min. 18 mm [0.71 in] deep
G	Oil circulation hole	H	Hardened stop plate

Attached component internal splines

The attached component must have internal splines corresponding to the external splines on the motor cardan shaft (see the following drawing).

Material:

Case hardening steel with a tensile strength corresponding at least to 20 MCr4 (900 N/mm²) or SAE 8620.


Hardening specification:

- On the surface: HV = 750 ± 50
- 0.7 ± 0.2 mm under the surface: HV = 560

Internal involute spline data: Standard ANSI 892.1-1970, class 5 (corrected m · X = 7; m = 2.1156)

Flat root side fit	mm	in
Number of teeth	z	16
Pitch	DP	12/24
Pressure angle		30°
Pitch dia.	D	33.8656
Major dia.	D ₀	38.4 _{-0.04} ^{+0.04}
Form dia. (min.)	D ₁	37.6
Minor dia.	D ₂	32.150 _{-0.04} ^{+0.04}
Space width (circular)	L ₀	4.516 _{-0.003} ^{+0.003}
Tooth thickness (circular)	S ₀	2.100
Fillet radius	R _{fillet}	0.5
Max. measurement between pins [†]	t	26.9 _{-0.1} ^{+0.1}
Pin dia.	d	4.834 _{-0.001} ^{+0.001}

[†] Finished dimensions (when hardened).

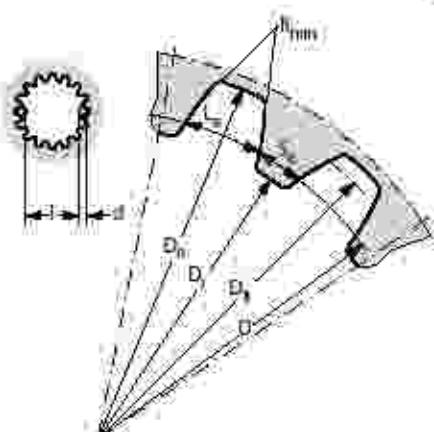OMT

131-111-10.

Motor or attached component drain connection

Use the drain line when pressure in the return line exceeds the permissible pressure on the shaft seal of the attached component.

Connect the drain line either at the:

- * Motor drain-connection
- * Drain-connection of the attached component

If a drain line is fitted to the attached component, it must be possible for oil to flow freely between motor and attached component.

The drain line must be led to the tank in such a way that there is no risk of the motor and attached component being stained of oil when at rest.

The maximum pressure in the drain line is limited by the attached component and its shaft seal.

OMV

Versions

OMV versions

Mounting flange	Shaft	Port size	European version	US version	Drain connection	Check valve	Main type designation
Standard flange	Cyl. 50 mm	G1	X		Yes	Yes	OMV
	Cyl. 225 mm	1 5/16-12 UN		X	Yes	Yes	OMV
	Splined 2.125 in	G1	X		Yes	Yes	OMV
		1 5/16-12 UN		X	Yes	Yes	OMV
	Tapered 60 mm	G1	X		Yes	Yes	OMV
SAE-C flange	Tapered 2.25 in	1 5/16-12 UN		X	Yes	Yes	OMV
	Cyl. 2.25 in	1 5/16-12 UN		X	Yes	Yes	OMV
	Splined 2.125 in	1 5/16-12 UN		X	Yes	Yes	OMV
Wheel	Cyl. 50 mm	G1	X		Yes	Yes	OMVW
	Tapered 60 mm	G1	X		Yes	Yes	OMVW
	Tapered 2.25 in	1 5/16-12 UN		X	Yes	Yes	OMVW
Short	No output shaft	G1	X		Yes	Yes	OMVS

Features

Features available (options):

- Speed sensor
- Motor with tacho connection
- Vibron shaft seal
- Painted
- Ultra short

Code numbers

OMV code numbers

Code Numbers	Displacement [cm³]				
	315	400	500	630	800
1518	3100	3101	3102	3103	3104
1518	2150	2151	2152	2153	2154
1518	3105	3106	3107	3108	3109
1518	2155	2156	2157	2158	2159
1518	3110	3111	3112	3113	3114
1518	2160	2161	2162	2163	2164
1518	2183	2184	2185	2186	2187
1518	2188	2189	2190	2191	2192
1518	3115	3116	3117	3118	3119
1518	3120	3121	3122	3123	3124
1518	2170	2171	2172	2173	2174
1518	3125	3126	3127	3128	3129

OMV**Ordering**

Add the four digit prefix "1518" to the four digit numbers from the chart for complete code number.

Example:

15183101 for an OMV 400 with standard flange, cyl. 50 mm shaft and port size G 1

Orders will not be accepted without the four digit prefix.

Technical data

Technical data for OMV, OMVW and OMVS

Type	OMV OMVW OMVS	OMV OMVW OMVS	OMV OMVW OMVS	OMV OMVW OMVS	OMV OMVW OMVS
Motor size	315	400	500	630	800
Geometric displacement cm ³ [in ³]	314.5 [19.19]	400.9 [24.46]	499.6 [30.49]	629.1 [38.39]	801.8 [48.93]
Max. speed: min ⁻¹ [rpm]	cont. int ^a	510 630	500 480	400 380	315 300
Max. torque: Nm [lbf.in]	cont. int ^b	920 [8140] 1110 [9820]	1180 [10440] 1410 [12480]	1480 [12920] 1760 [15580]	1560 [14690] 1940 [17170]
Max. output: kW [hp]	cont. int ^b	42.5 [57.0] 51.0 [68.4]	53.5 [71.7] 64.0 [85.8]	53.5 [71.7] 64.0 [85.8]	48.0 [64.4] 56.0 [75.1]
Max. pressure drop: bar [psi]	cont. int ^b peak ^c	200 [2900] 240 [3480] 280 [4060]	200 [2900] 240 [3480] 280 [4060]	200 [2900] 240 [3480] 280 [4060]	180 [2610] 210 [3050] 210 [3050]
Max. oil flow: l/min [US gal/min]	cont. int ^b	160 [42.3] 200 [52.8]	200 [52.8] 240 [63.4]	200 [52.8] 240 [63.4]	200 [52.8] 240 [63.4]
Max. starting pressure with unloaded shaft	bar [psi]	8 [116]	8 [116]	8 [116]	8 [116]
Min. starting torque: Nm [lbf.in]	at max. press. drop cont. at max. press. drop int. ^b	710 [6280] 850 [7520]	910 [8050] 1090 [9650]	1130 [10000] 1360 [12040]	1330 [11770] 1550 [13720]
OMV OMVW OMVS	bar [psi]	cont. int. ^b peak ^c	210 [3050] 250 [3630] 300 [4350]	140 [2030] 175 [2540] 210 [3050]	

^a Intermittent operation; the permissible values may occur for max. 10% of every minute.


^b Peak load; The permissible values may occur for max. 1% of every minute.

^c For max. permissible combination of flow and pressure, see function diagram for actual motor.

Maximum permissible shaft seal pressure**Motor with check valves and without use of drain connection**

The pressure on the shaft seal never exceeds the pressure in the return line.



OMV



(155-320.10)

Maximum return pressure

The shaft seal pressure equals the pressure on the drain line.

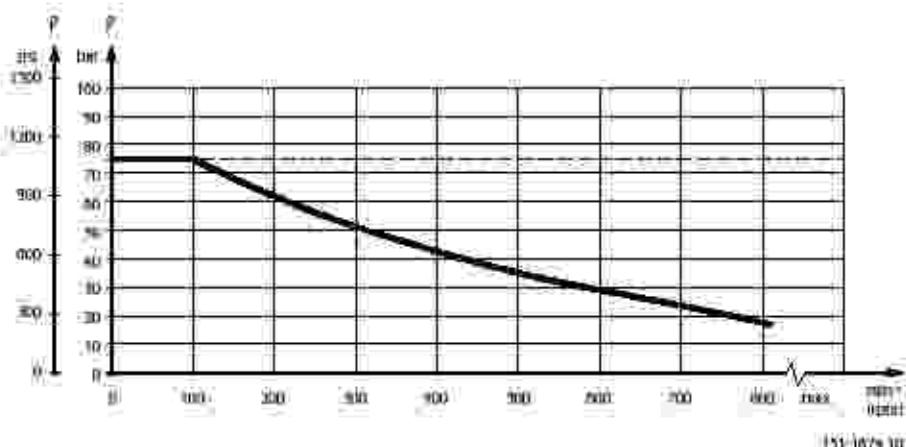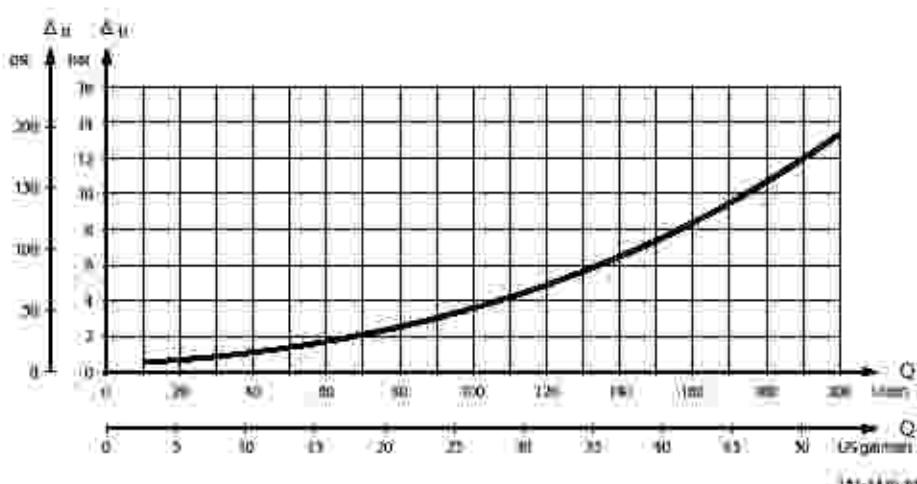
Maximum return pressure without drain line or maximum pressure in the drain line*— Intermittent operation; the permissible values may occur for max. 10% of every minute**— Continuous operation***Pressure drop in motor**

The curve applies to an unloaded motor (shaft) and an oil viscosity of 35 mm²/s [165-505]

OMV**Oil flow in drain line**

Maximum oil flow in the drain line at a return pressure less than 5-10 bar [75-150 psi]

Pressure drop bar [psi]	Viscosity mm ² /s [SUS]	Oil flow in drain line l/min [US gal/min]
140 [2030]	20 [100]	3.0 [0.79]
	35 [165]	2.0 [0.53]
210 [3050]	20 [100]	6.0 [1.59]
	35 [165]	4.0 [1.06]

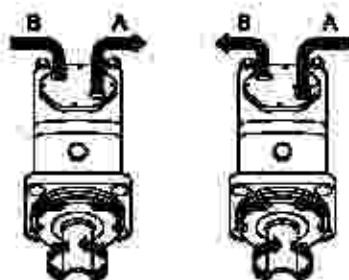Direction of shaft rotation


1DF-384.10

Permissible shaft loads for OMV**Mounting flange:**

Standard

Shaft:

All shaft types

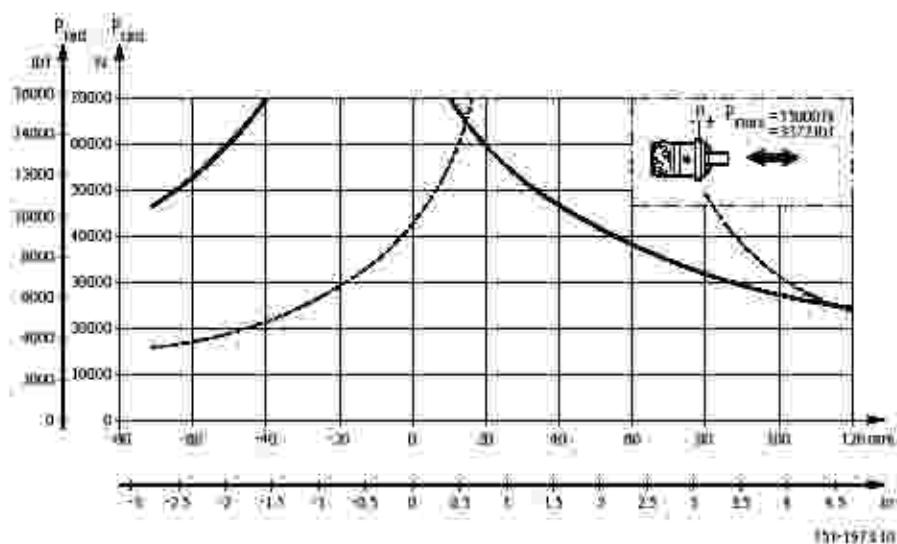


OMV***Mounting flange:***

Wheel

Shaft:

All shaft types

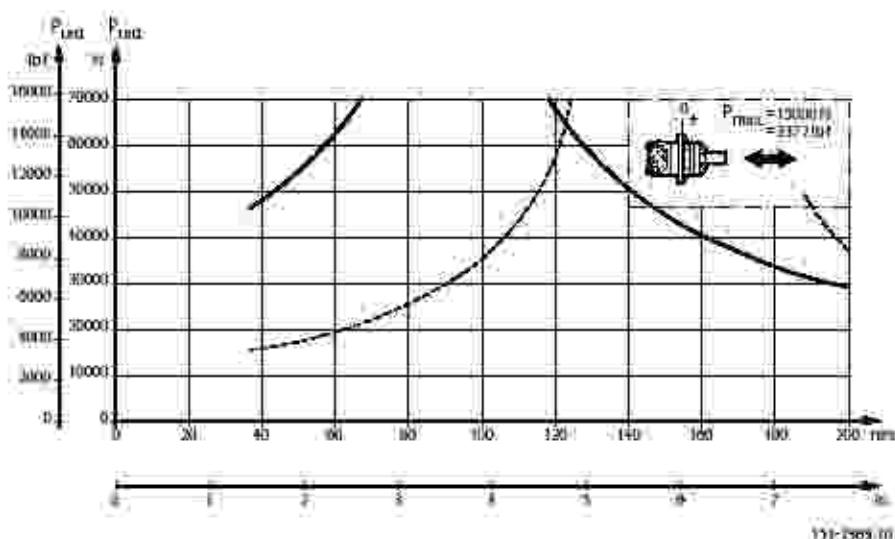

The output shaft runs in tapered roller bearings that permit high axial and radial forces.

The permissible radial load on the shaft is shown for an axial load of 0 N as a function of the distance from the mounting flange to the point of load application.

The curve is based on 810 bearing life (2000 hours or 12 000 000 shaft revolutions at 100 min⁻¹) at rated output torque, when mineral-based hydraulic oil with a sufficient content of anti-wear additives, is used.

For 3 000 000 shaft revolutions or 500 hours – increase these shaft loads with 52%.

The dash curve shows maximum radial shaft load. Any shaft load exceeding the values shown in the curve will involve a risk of breakage.

Bearing life calculations can be made using the explanation and formula provided in the chapter "Bearing dimensioning" in the technical information "General Orbital motors" 520L0232.


Mounting flange:

SAE-C

Shaft:

All shaft types

OMV

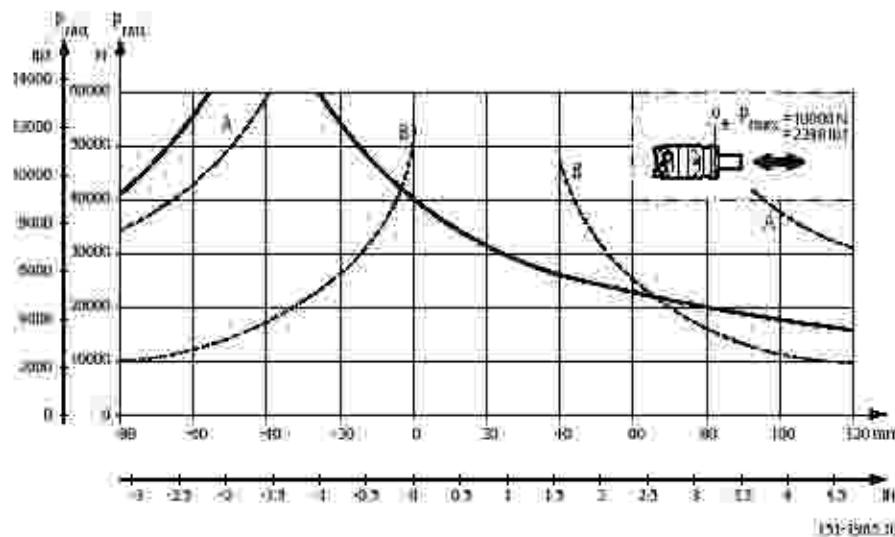

A Cyl. 2.25 in shaft

B Splined 2.125 in shaft

The output shaft runs in tapered roller bearings that permit high axial and radial forces.

The permissible radial load on the shaft is shown for an axial load of 0 N as a function of the distance from the mounting flange to the point of load application.

The curve is based on 810 bearing life (2,000 hours or 12,000,000 shaft revolutions at 100 min⁻¹) at rated output torque. When mineral-based hydraulic oil with a sufficient content of anti-wear additives is used for 3,000,000 shaft revolutions or 500 hours – increase these shaft loads with 52%.

The dash curve shows max. radial shaft load. Any shaft load exceeding the values shown in the curve will involve a risk of breakage.



Bearing life calculations can be made using the explanation and formula provided in the chapter "Bearing dimensioning" in the technical information "General Orbital motors" S20L0232.

Function diagrams



Continuous range

Intermittent range (maximum 10% operation every minute)


OMV

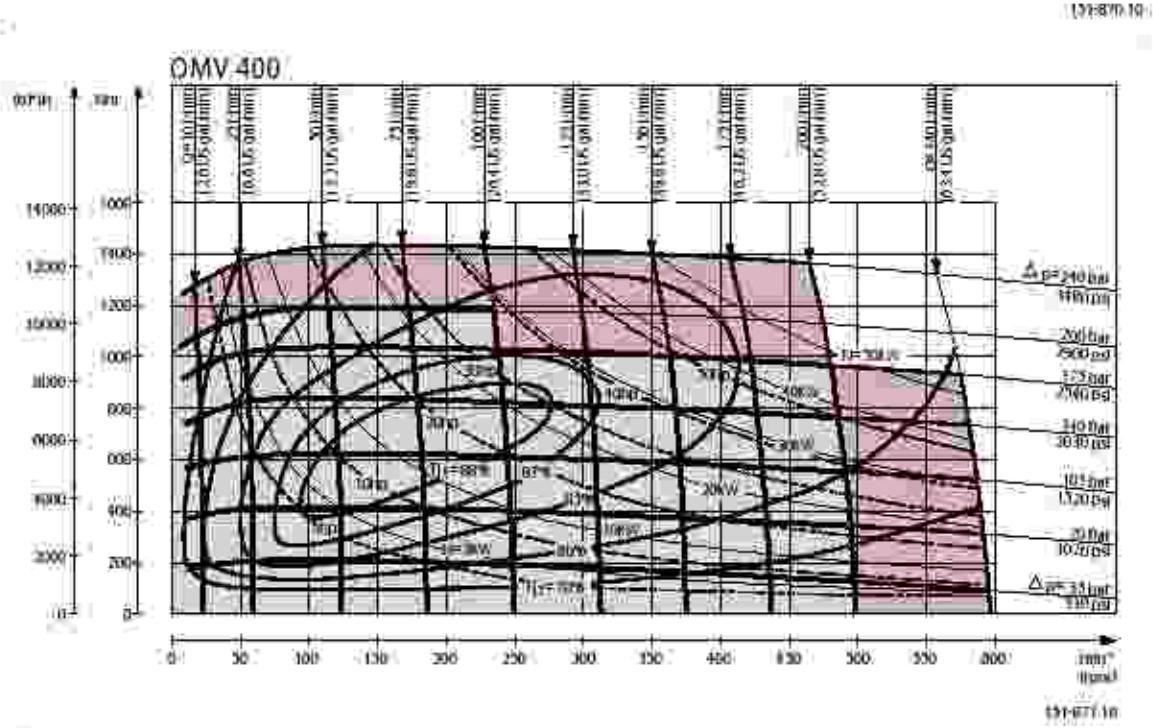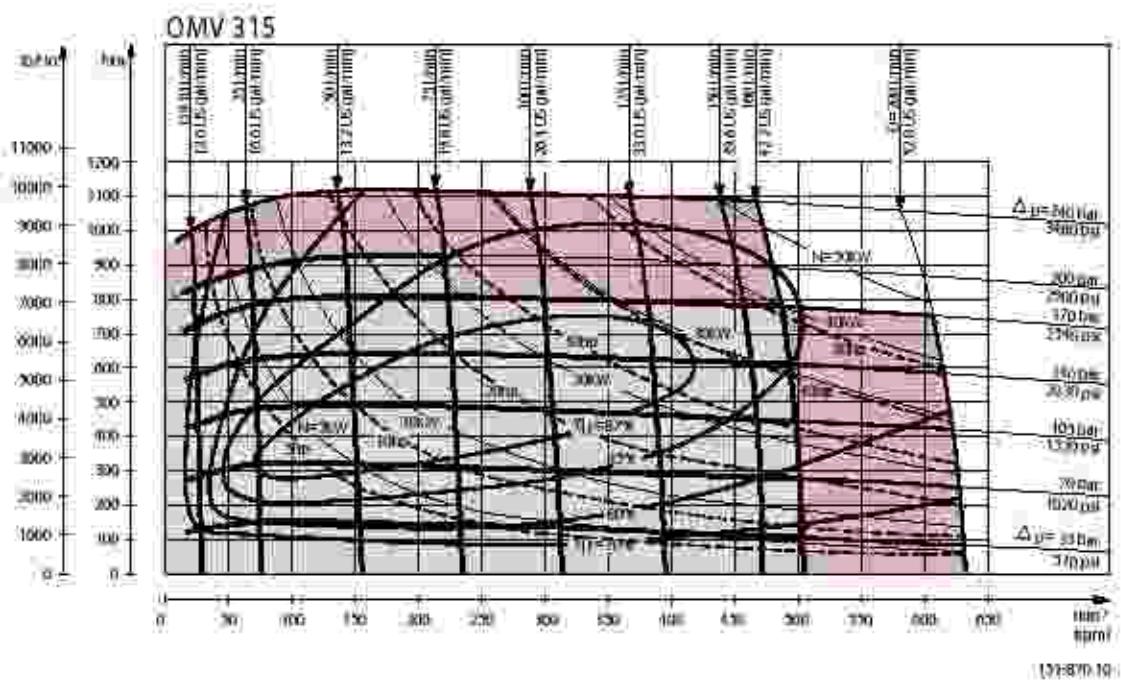

OMV

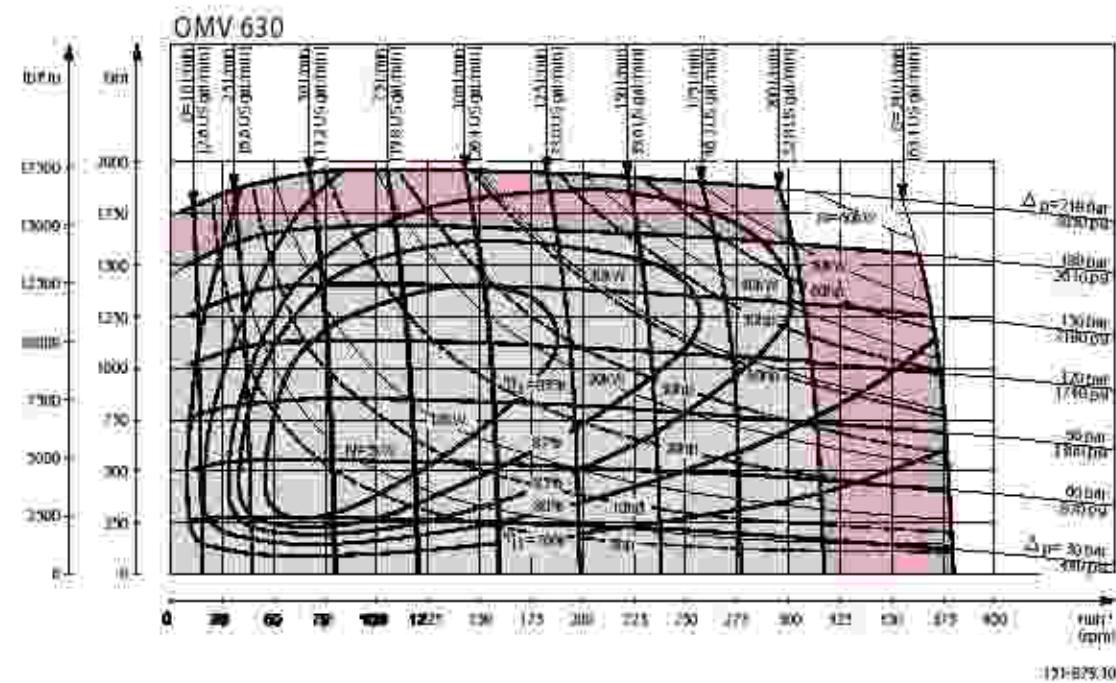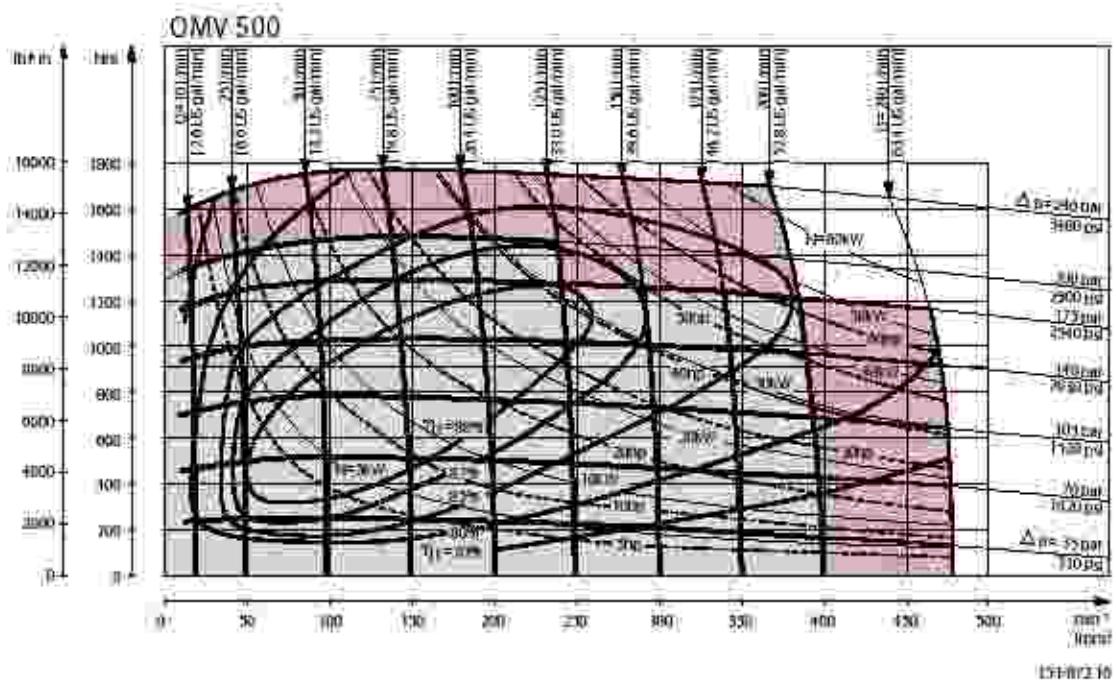







OMV

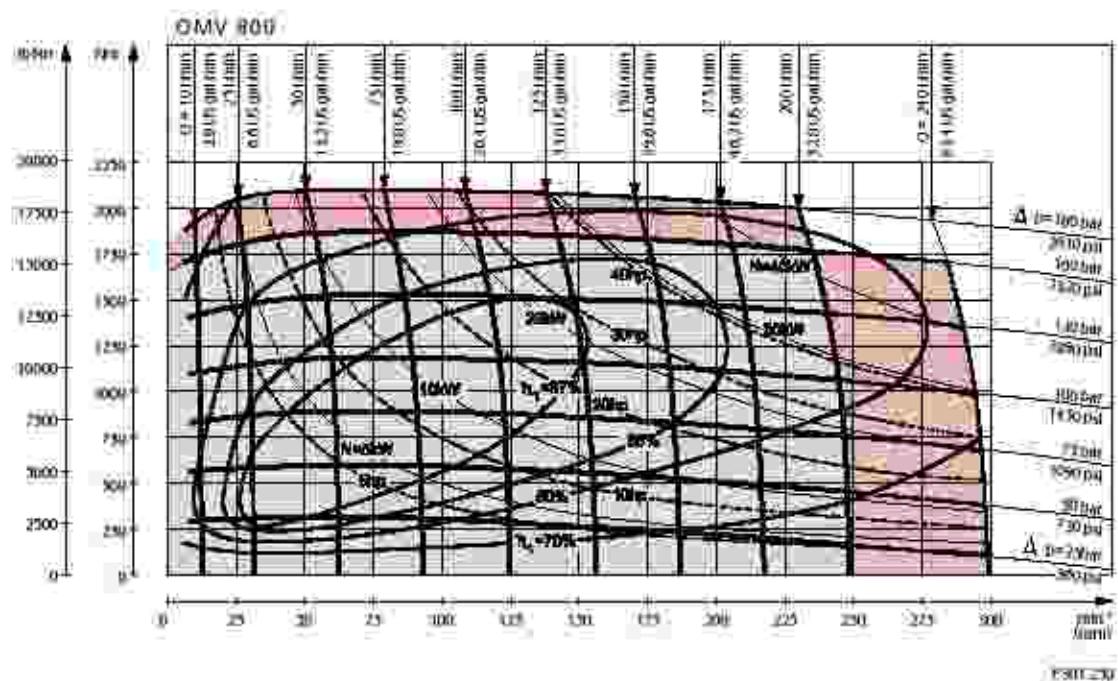

Function diagram use

Explanation of function diagram use, basis and conditions, see [Speed, torque and output](#) on page 7.

Intermittent pressure drop and oil flow must not occur simultaneously.

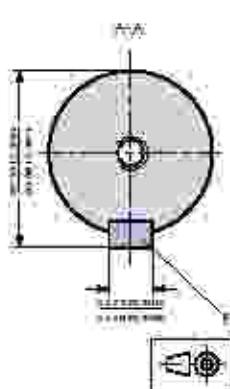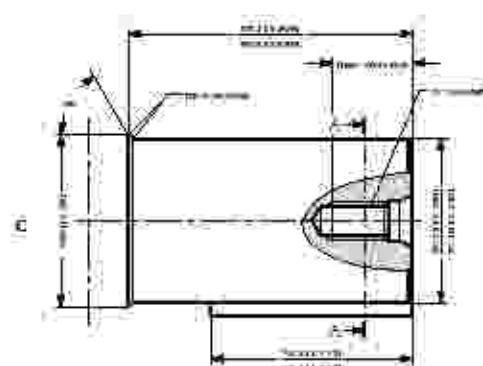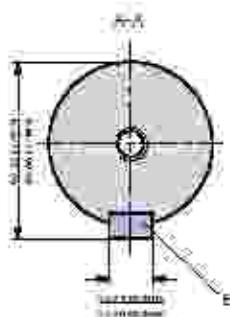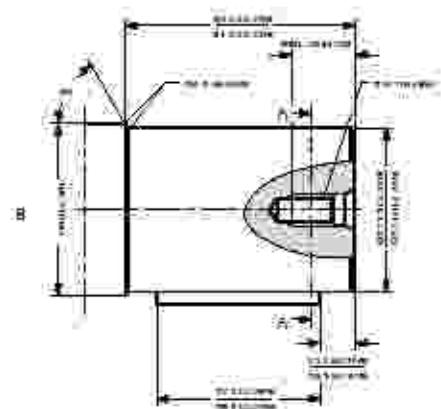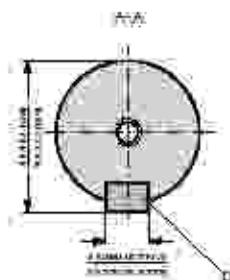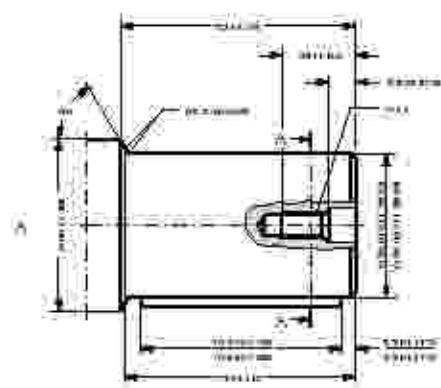OMV**Shaft version**

A Cylindrical 50 mm shaft

D Parallel key

A14 x 9 x 70; DIN 6885

Keyway deviates from standard

B Cylindrical 2.25 in shaft for OMV with standard mounting flange

E Parallel key

1/2 x 1/2 x 2 1/4 in B.S. 46

Keyway deviates from standard







C Cylindrical 2.25 in shaft for OMV with mounting flange SAE-C

F Parallel key

1/2 x 1/2 x 2 1/4 in B.S. 46

Keyway deviates from standard

OMV

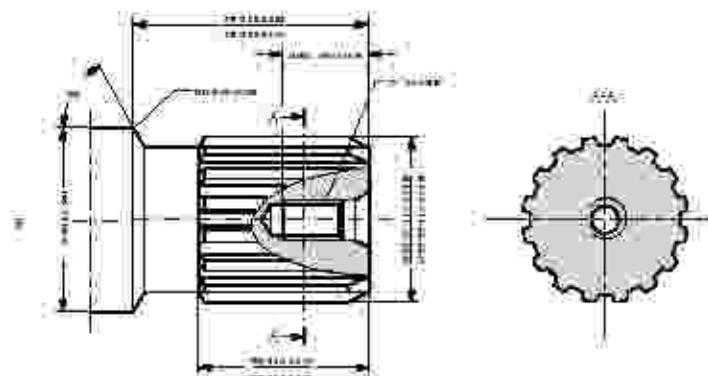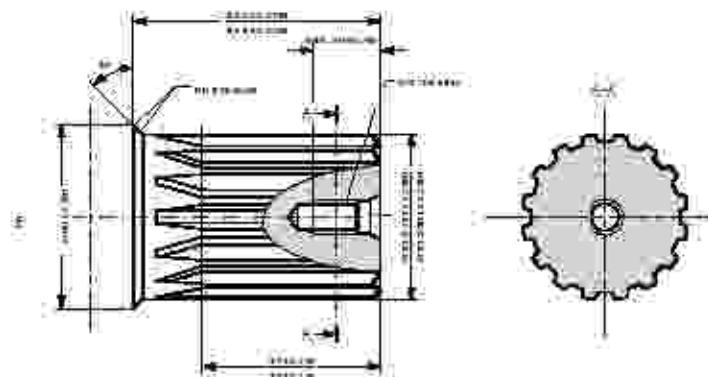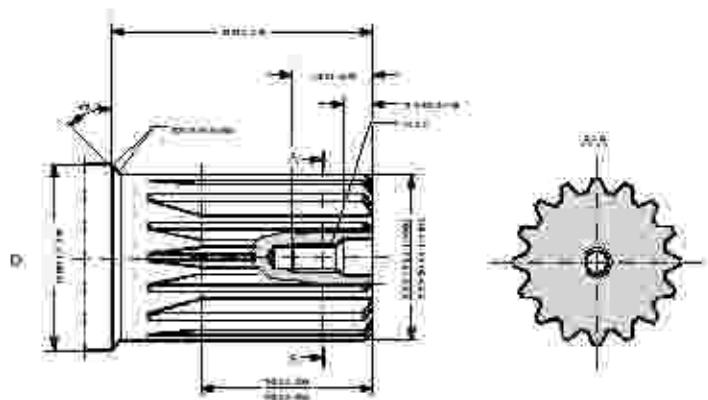

D Involute splined shaft ANSI B92.1-1970 standard
Flat root side fit
Pitch 8/16; Teeth 16
Major dia. 2.125 in
Pressure angle 30°


E US version

Involute splined shaft for OMV with standard mounting flange ANSI B92.1-1970 standard
Flat root side fit
Pitch 8/16; Teeth 16
Major dia. 2.125 in

F (US version)

Involute splined shaft for OMV with mounting flange SAE-C ANSI B92.1-1970 standard
Flat root side fit
Pitch 8/16; Teeth 16
Major dia. 2.125 in

OMV

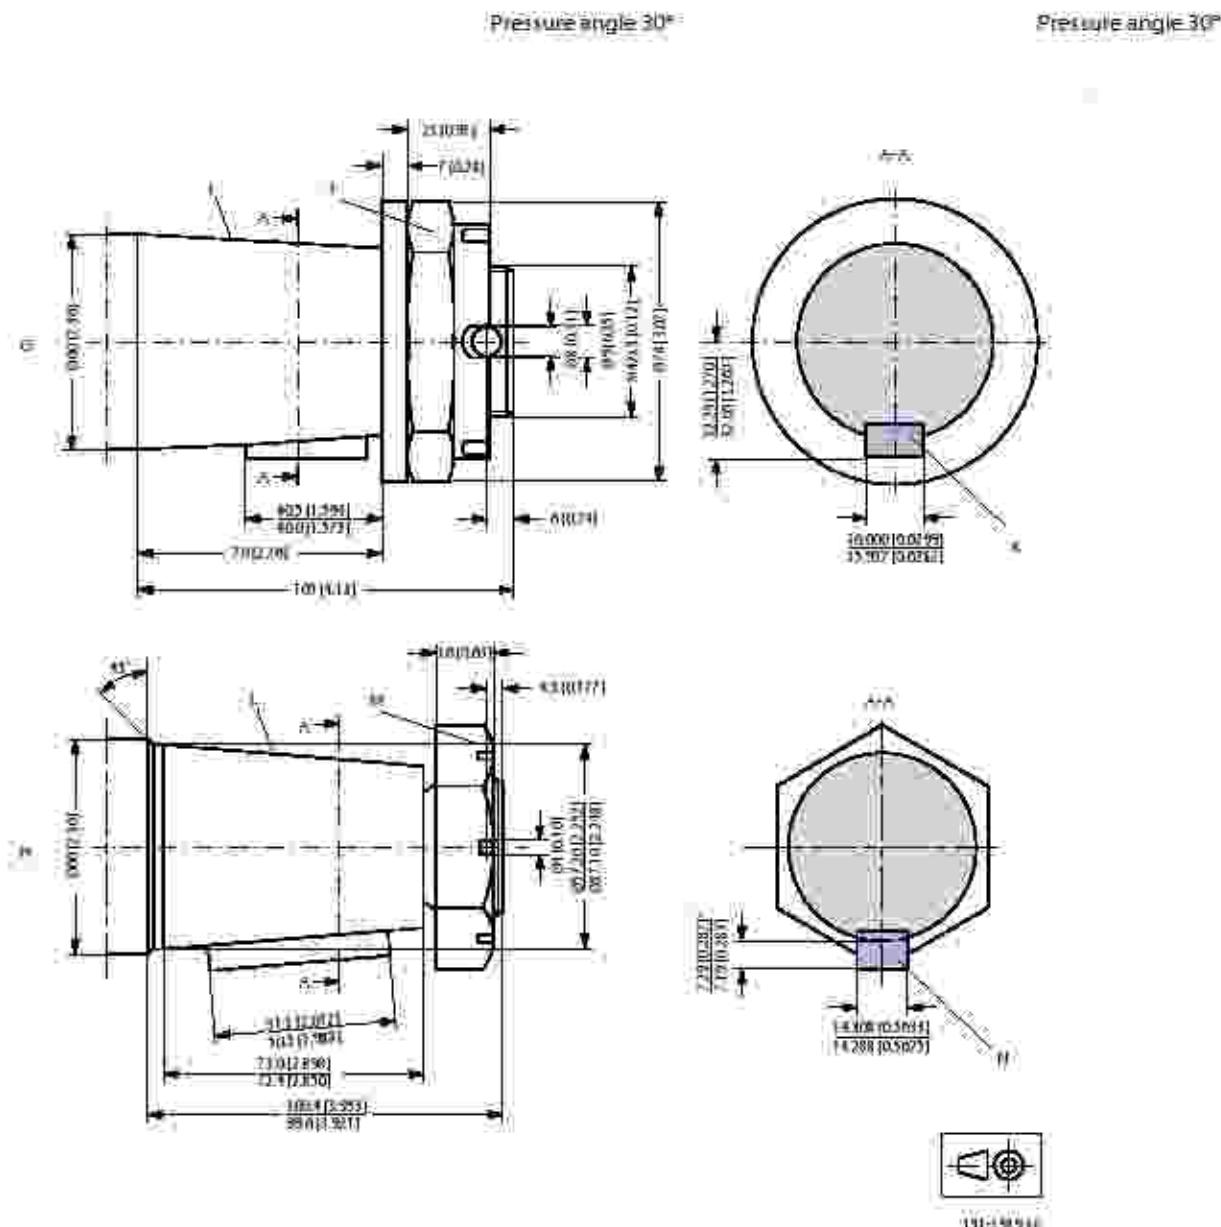**G** Tapered 60 mm shaft (ISO/R775)**J** DIN 937

Across flats: 65 mm

Tightening torque: $750 \pm 50 \text{ Nm}$ [$5640 \pm 440 \text{ lb}\cdot\text{in}$]**I** Taper 1:10**K** Parallel key B16 x 10 x 32

DIN 6885

Keyway deviates from standard

H Tapered 2.25 in shaft**L** Cone 1:8

SAE 501

M 11/2-18 UNEF

Across flats: 23/8 in

Tightening torque: $750 \pm 50 \text{ Nm}$ [$5640 \pm 440 \text{ lb}\cdot\text{in}$]**N** Parallel key


9/16 x 9/16 x 2 in

85-46

OMV

Keyway deviates from standard.


Port thread versions:

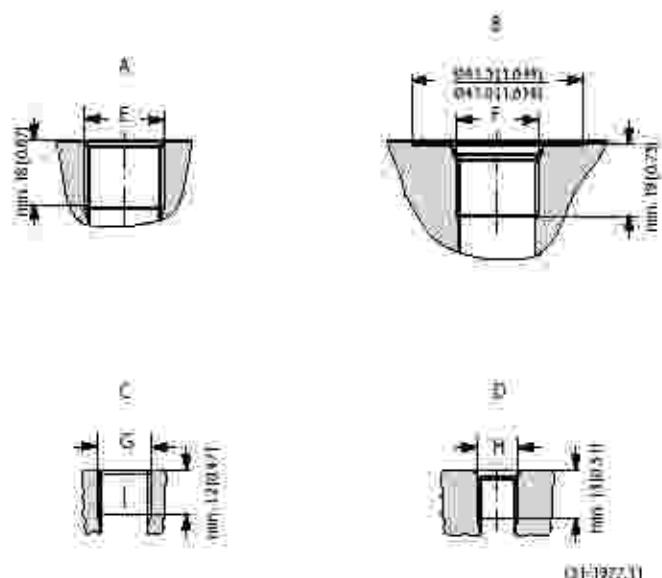

OMV

Dimensions

Standard flange—European version

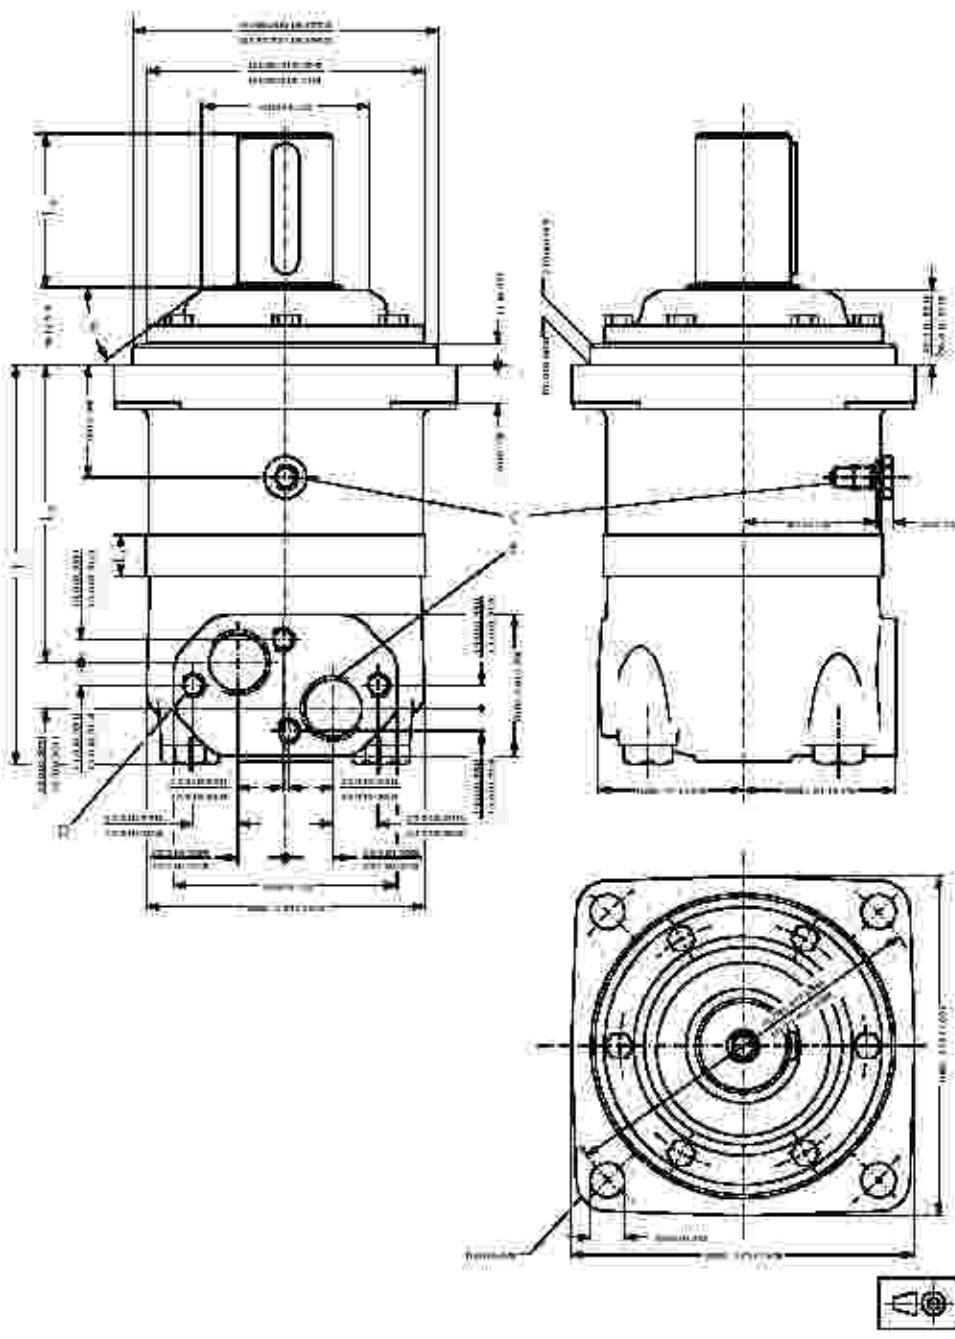

C: Drain connection G 1/4" 12 mm [0.47 in] deep

D: M12x12 mm [0.47 in] deep

E: G 1/18 mm [0.71 in] deep

OMV


Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMV 315	215 [8.46]	22.0 [0.866]	160 [6.30]
OMV 400	222 [8.74]	29.0 [1.142]	157 [6.15]
OMV 500	230 [9.05]	37.0 [1.457]	175 [6.89]
OMV 630	240 [9.45]	47.5 [1.870]	186 [7.32]
OMV 800	254 [10.00]	61.5 [2.421]	200 [7.87]

* The gearwheel set is 3.5 mm [0.138 in] wider across the miller than the L1 dimensions.

Output shaft	L _f mm [in]
Cyl. 50 mm Splined 2.125 in	82 [3.23]
Tapered 60 mm	105 [4.13]

OMV

Standard flange—US version

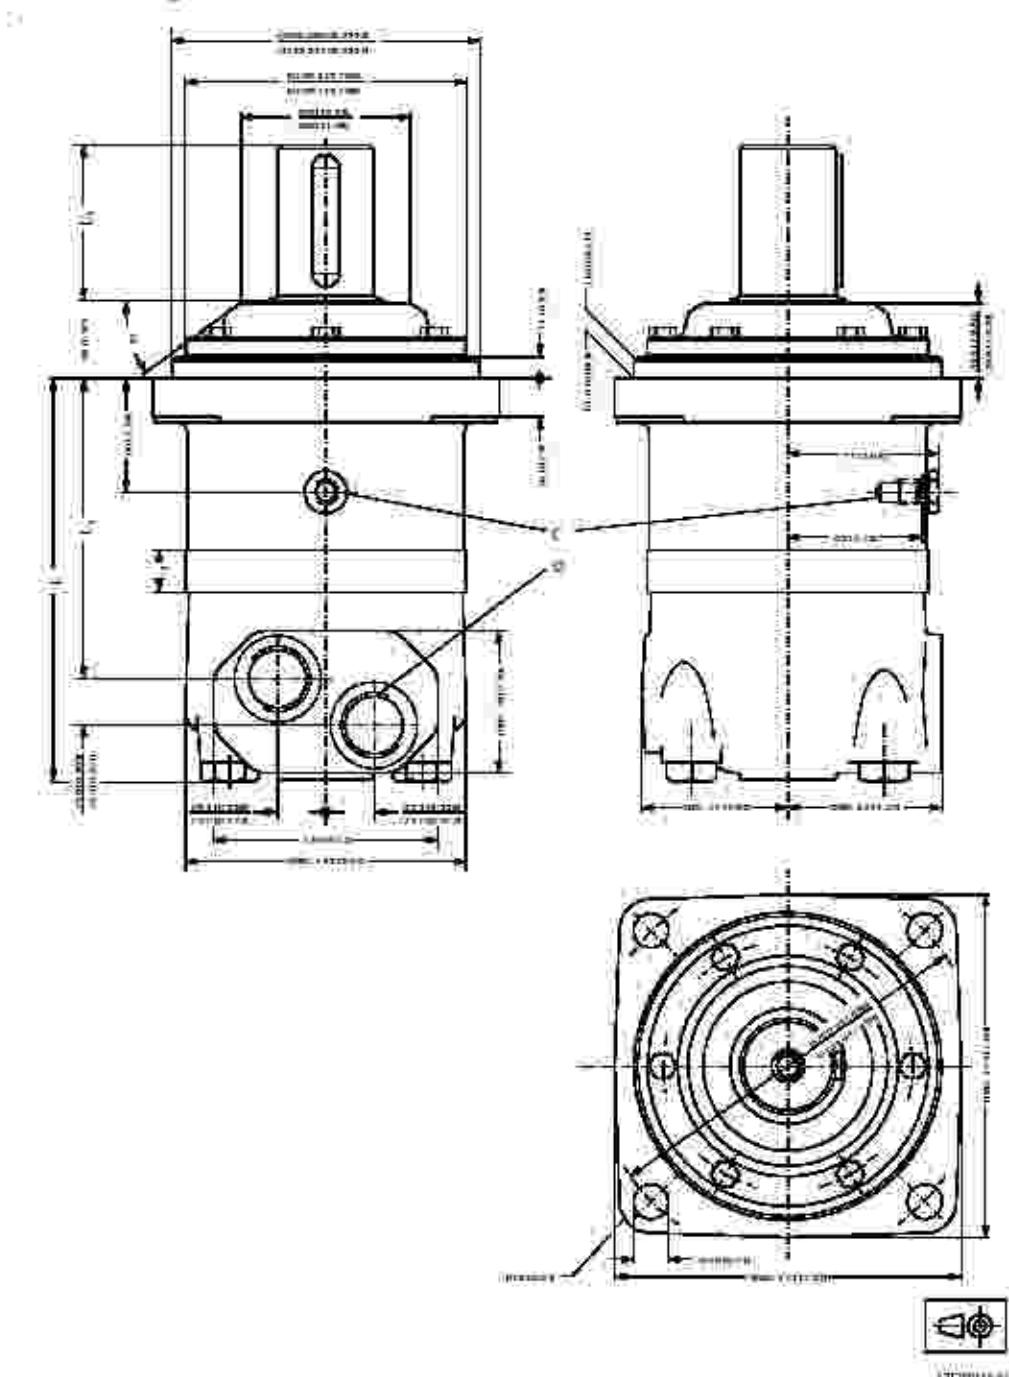

C: Drain connection 916 - 18 UNF 13 mm (0.51 in) deep O-ring boss port

D: 1 1/16 - 12 UNF 19 mm (0.75 in) deep O-ring boss port

Type	L_{box} mm [in]	L_1 mm [in]	L_3 mm [in]
OMV 315	215 [8.46]	22.0 [0.866]	160 [6.30]
OMV 400	222 [8.74]	29.0 [1.142]	167 [6.57]
OMV 500	230 [9.05]	37.0 [1.457]	175 [6.89]

OMV


Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMV 630	240 [9.45]	47.5 [1.870]	186 [7.32]
OMV 800	254 [10.00]	61.5 [2.421]	200 [7.87]

* The gearwheel set is 3.5 mm [0.138 in] wider across the rollers than the L1 dimensions.

Output shaft	L ₃ mm [in]
Cyl. 2.25 in. Splined 2/125 in.	82 [3.23]
Tapered 2.25 in.	100 [3.94]

OMV

SAE-C flange—US version

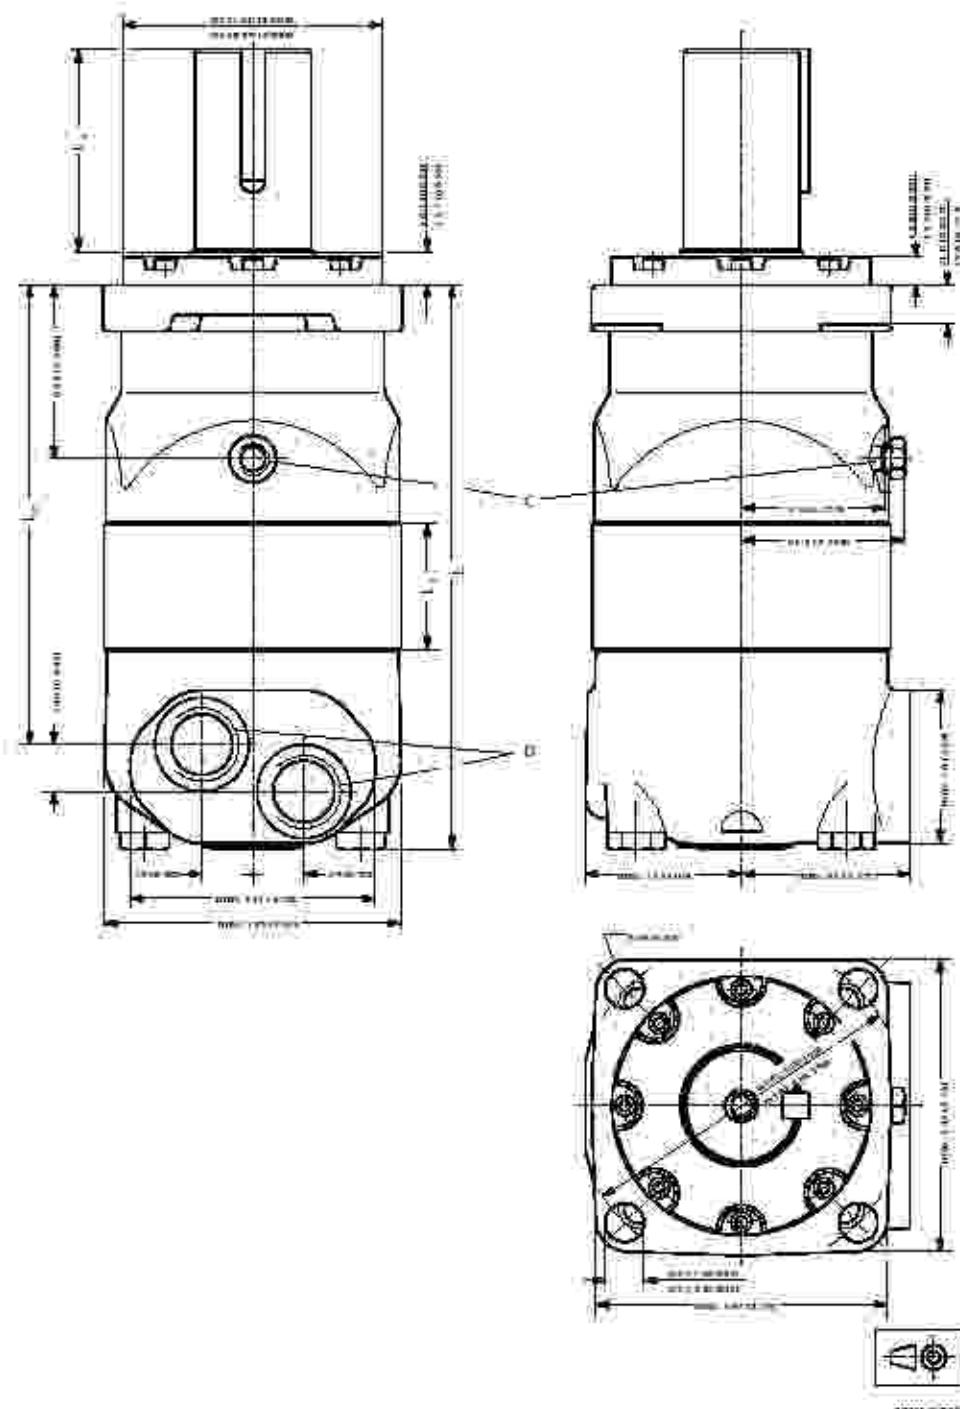

C: Drain connection 9/16-18 UNF; 13 mm (0.51 in) deep O-ring boss port

D: 1 1/16-12 UNF; 19 mm (0.75 in) deep O-ring boss port

OMV


Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMV 315	239 [9.41]	220 [8.66]	185 [7.38]
OMV 400	246 [9.59]	29.0 [1.142]	192 [7.56]
OMV 500	254 [10.00]	37.0 [1.457]	200 [7.87]
OMV 630	263 [10.43]	47.5 [1.870]	211 [8.31]
OMV 800	279 [10.98]	61.5 [2.421]	225 [8.86]

* The gearwheel set is 3.5 mm [0.138 in] wider across the miller than the L1 dimensions.

Output shaft	L _f mm [in]
Cyl 2.25 in.	99 [3.90]
Splined 2.125 in.	76.7 [3.02]

OMV

Wheel—European version

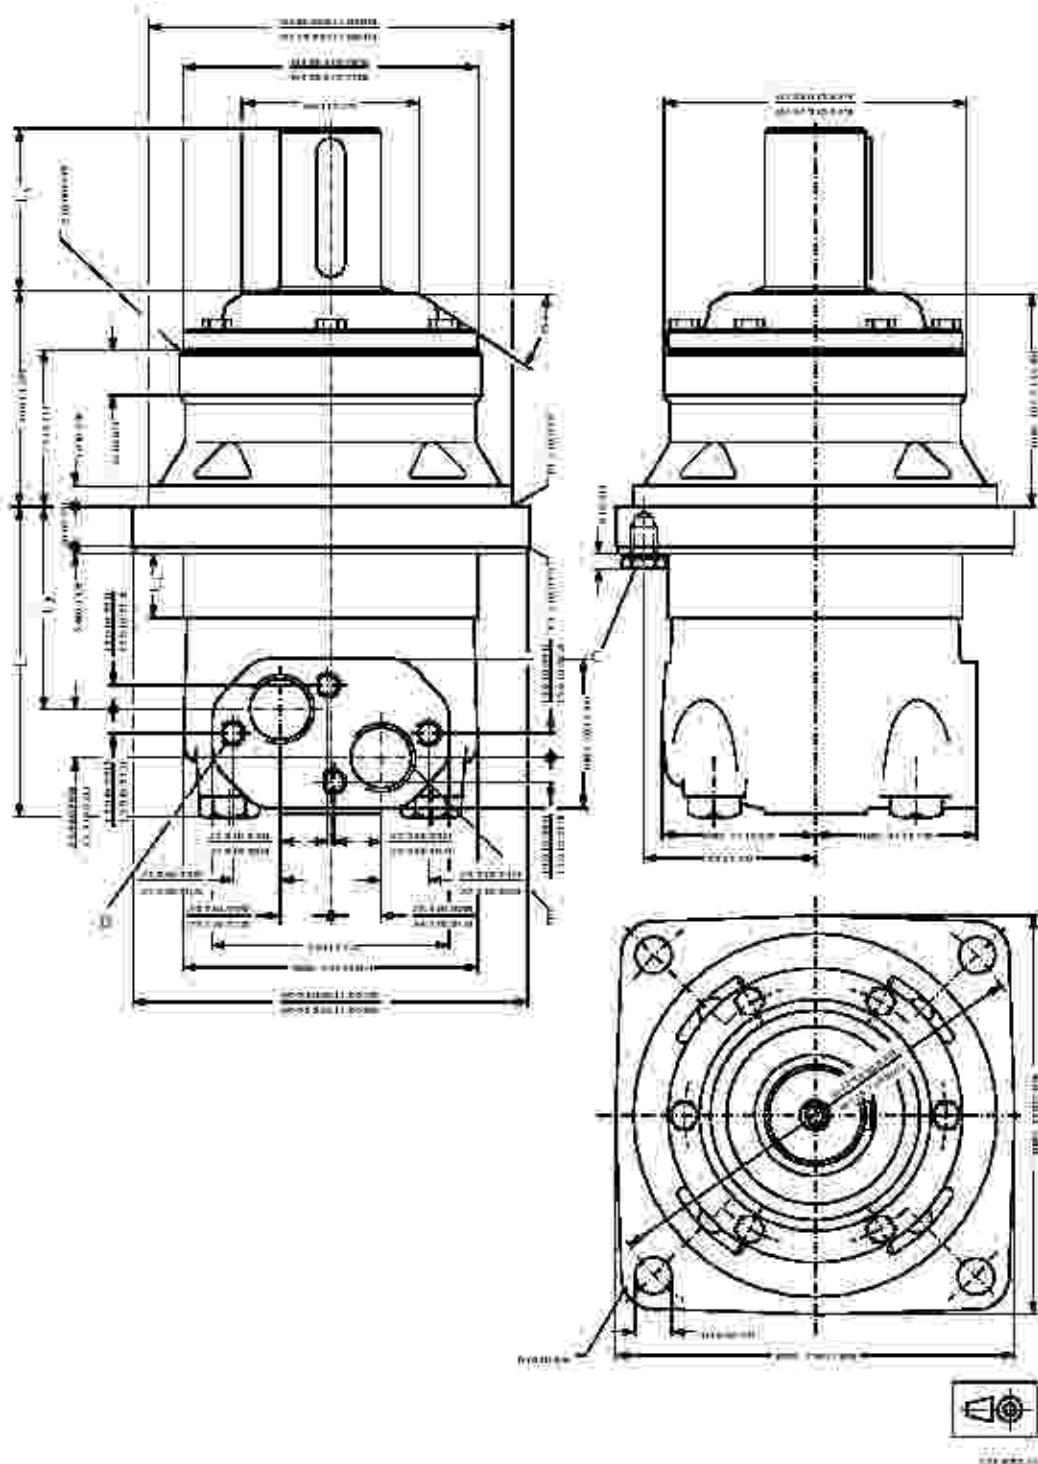

C: Drain connection G 1/4" 12 mm [0.47 in] deep

D: M12; 12 mm [0.47 in] deep

E: G 1/4" 18 mm [0.71 in] deep

OMV


Type	L _{max} mm [in]	L ₁ mm [in]	L ₂ mm [in]
OMVW 315	146 [5.75]	22.0 [1.866]	92 [3.62]
OMVW 400	153 [6.02]	29.0 [1.142]	99 [3.90]
OMVW 500	161 [6.34]	37.0 [1.457]	107 [4.21]
OMVW 630	172 [6.77]	47.5 [1.870]	118 [4.65]
OMVW 800	185 [7.28]	61.5 [2.421]	132 [5.20]

* The gearwheel set is 3.5 mm [0.138 in] wider across the miller than the L1 dimensions.

Output shaft	L ₃ mm [in]
Cyl. 59 mm	82 [3.23]
Tapered 60 mm	105 [4.13]

OMV

Wheel—US version

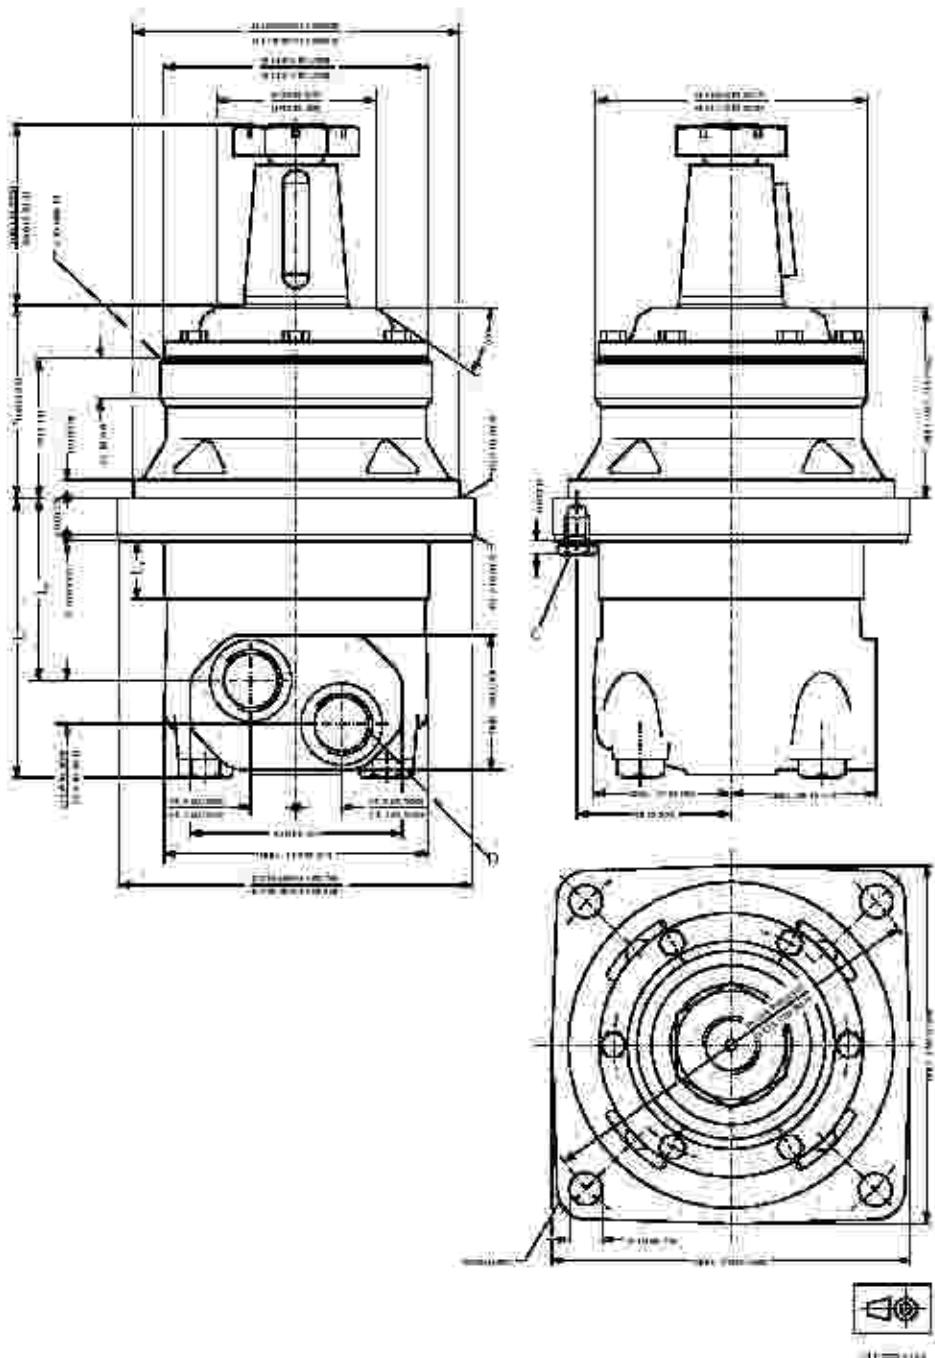

C: Drain connection 916-18 UNF; 13 mm (0.51 in) deep O-ring boss port

D: 15/16-12 UNF; 19 mm (0.75 in) deep O-ring boss port


Type	L _{ext} mm (in)	L ₁ mm (in)	L ₂ mm (in)
OMW 315	147 [5.79]	22.0 [0.866]	92 [3.62]
OMW 400	154 [6.06]	29.0 [1.142]	99 [3.90]
OMW 500	162 [6.38]	37.0 [1.457]	107 [4.21]

OMV

Type	L_{max} mm [in]	L_1 mm [in]	L_2 mm [in]
OMVW 630	172 [6.77]	47.5 [1.870]	118 [4.65]
OMVW 600	187 [7.36]	61.5 [2.421]	132 [5.20]

* The gearwheel set is 3.5 mm [0.138 in] wider across the rollers than the L1 dimensions.

Short—European Version

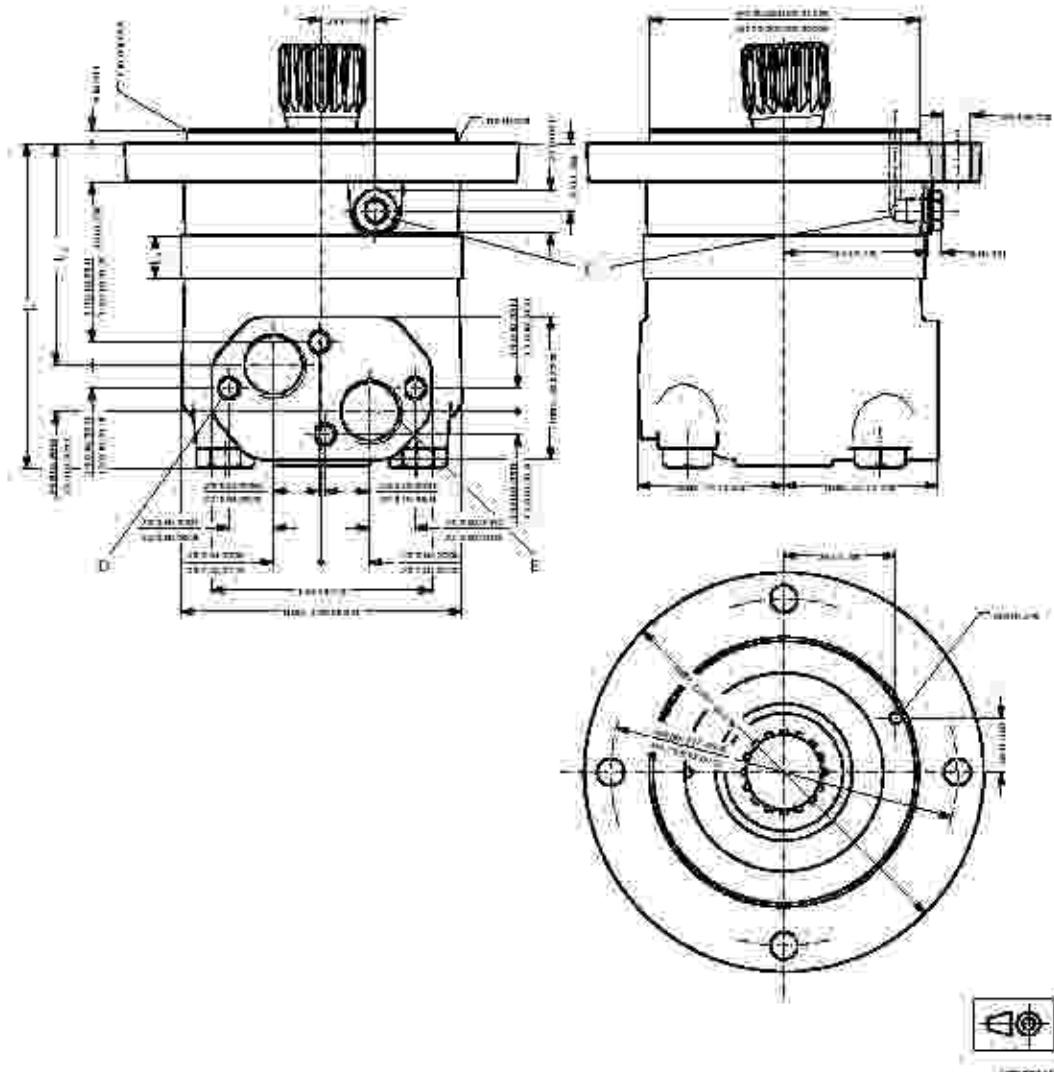

C: Drain connection G 1/4; 12 mm [0.47 in] deep

D: M12; 12 mm [0.47 in] deep

E: G 1; 18 mm [0.71 in] deep

Type	L_{max} mm [in]	L_1 mm [in]	L_2 mm [in]
OMVS 315	171 [6.73]	22.0 [0.866]	117 [4.61]
OMVS 400	179 [7.05]	29.0 [1.142]	124 [4.88]
OMVS 500	186 [7.32]	37.0 [1.457]	132 [5.20]

OMV

Type	L_{max} mm [in]	L_1 mm [in]	L_2 mm [in]
OMV5630	197 [7.76]	47.5 [1.870]	143 [5.63]
OMV5800	211 [8.31]	61.5 [2.421]	157 [6.18]

* The gearwheel set is 3.5 mm [0.138 in] wider across the rollers than the L1 dimensions.

OMVS**Installation**

The cardan shaft of the OMVS motor acts as an "output shaft". Because of the movement of the shaft, no seal can be fitted at the shaft output.

Internal oil leakage from the motor will therefore flow into the attached component.

During start and operation it is important that the spline connection and the bearings in the attached component receive oil and are adequately lubricated. To ensure that the spline connection receives sufficient oil, a conical sealing ring between the shaft of the attached component and the motor intermediate plate is recommended. This method is used in the OMV.


The conical sealing ring (code no. 63389021) is supplied with the motor.

To ensure that oil runs to the bearings and other parts of the attached component, the stop plate must have a hole in it (see fig. below).

We recommend an O-ring between motor and attached component. The O-ring (code no. 15181041) is supplied with the motor. If motor and attached component have been separated, remember to refill before starting up. Fill the oil through the drain connection.

Attached component dimensions

OMVS dimensions of the attached component in millimeter/inches)

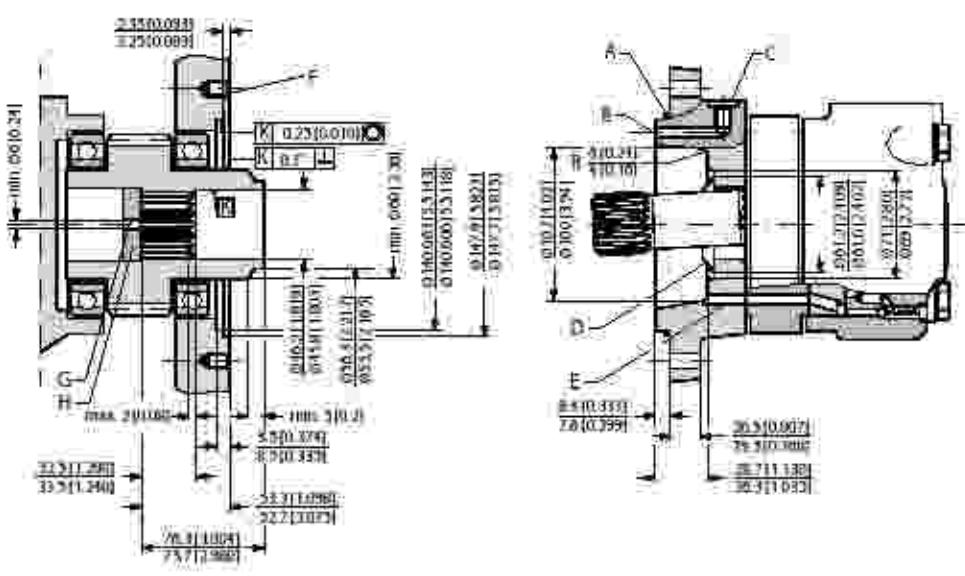

A O-ring: 140 x 3 mm

B External drain channel

C Drain connection G 1/4: 12 mm [0.47 in] deep

E Internal drain channel

F M12: minimum 18 mm [0.71 in] deep

G Oil circulation hole

OMV

D Conical seal ring

H Hardened stop plate

Attached component internal splines

The attached component must have internal splines corresponding to the external splines on the motor cardan shaft (see the following drawing).

Material:

Case hardening steel with a tensile strength corresponding at least to 20 MnCr4 (900 N/mm²) or SAE 8620.


Hardening specification:

- On the surface: HV = 750 ± 50
- 0.7 ± 0.2 mm under the surface: HV = 560

Internal involute spline data: Standard ANSI B92.1-1970, class 5 (corrected m · X = 1; n = 2.54)

Flat root side fit	mm	in
Number of teeth	z = 16	16
Pitch	D _p = 10/20	10/20
Pressure angle	30°	30°
Pitch diameter	D = 40.640	1.6
Major diameter	D _M = 45.20 ^{+0.005}	1.780 ^{+0.0015}
Form diameter (minimum)	D _f = 44.5	1.756
Minor diameter	D _m = 38.5 ^{+0.005}	1.516 ^{+0.0015}
Space width (circular)	L _s = 5.180 ^{+0.032}	0.204 ^{+0.0012}
Tooth thickness (circular)	S _t = 2.835	0.1116
Fillet radius	R _{min} = 0.4	0.015
Maximum measurement between pins ¹	r = 32.47 _{-0.05}	1.278 _{-0.0025}
Pin diameter	d = 5.6 ^{+0.001}	0.22 ^{+0.0008}

¹ Finished dimensions (when hardened)

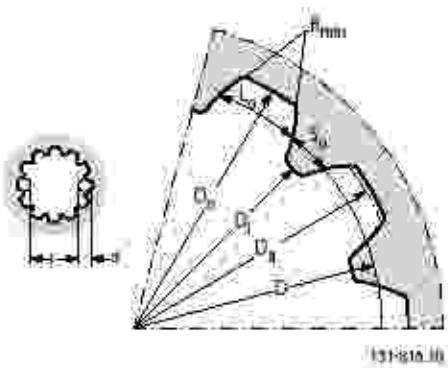

OMV

Motor or attached component drain connection

Use the drain line when pressure in the return line exceeds the permissible pressure on the shaft seal of the attached component.

Connect the drain line either at the:

- * Motor drain connection
- * Drain connection of the attached component

If a drain line is fitted to the attached component, it must be possible for oil to flow freely between motor and attached component.

The drain line must be led to the tank in such a way that there is no risk of the motor and attached component being drained of oil when at rest.

The maximum pressure in the drain line is limited by the attached component and its shaft seal.

Weight of motors

Code number and weight

Code number and weight of motors

Code no.	Weight	
	kg	[lb]
15182050	20.0	44.1
15182051	20.5	45.2
15182052	21.0	46.3
15182053	22.0	48.5
15182054	23.0	50.7
15182055	24.0	52.9
15182056	20.0	44.1
15182057	20.5	45.2
15182058	21.0	46.3
15182059	22.0	48.5
15182060	23.0	50.7
15182061	24.0	52.9
15182062	20.0	44.1
15182063	20.5	45.2
15182064	21.0	46.3
15182065	22.0	48.5
15182066	23.0	50.7
15182067	24.0	52.9
15182080	22.0	48.5
15182081	22.5	49.6
15182082	23.0	50.7
15182083	24.0	52.9
15182084	25.0	55.1
15182085	26.0	57.3
15182150	31.8	70.1
15182151	32.6	71.9
15182152	33.5	73.9
15182153	34.9	76.9
15182154	36.5	80.5
15182155	31.8	70.1
15182156	32.6	71.9
15182157	33.5	73.9
15182158	34.9	76.9
15182159	36.5	80.5
15182160	31.8	70.1
15182161	32.6	71.9
15182162	33.5	73.9
15182163	34.9	76.9

Weight of motors

Code number and weight of motors (continued)

Code no	Weight	
	kg	lb
151B2164	36.5	80.3
151B2170	32.4	71.4
151B2173	33.2	73.2
151B2172	34.1	75.2
151B2173	35.5	78.3
151B2174	37.1	81.8
151B2183	30.0	66.2
151B2184	30.8	67.9
151B2185	31.7	69.9
151B2186	33.1	73.0
151B2187	34.7	76.5
151B2188	36.0	66.2
151B2189	30.8	67.9
151B2190	31.7	69.9
151B2191	33.1	73.0
151B2192	34.7	76.5
151B3000	20.0	44.1
151B3001	20.5	45.2
151B3002	21.0	46.3
151B3003	22.0	48.5
151B3004	23.0	50.7
151B3005	24.0	52.9
151B3006	20.0	44.1
151B3007	20.5	45.2
151B3008	21.0	46.3
151B3009	22.0	48.5
151B3010	23.0	50.7
151B3011	24.0	52.9
151B3012	20.0	44.1
151B3013	20.5	45.2
151B3014	21.0	46.3
151B3015	22.0	48.5
151B3016	23.0	50.7
151B3017	24.0	52.9
151B3018	20.0	44.1
151B3019	20.5	45.2
151B3020	21.0	46.3
151B3021	22.0	48.5
151B3022	23.0	50.7
151B3023	24.0	52.9

Weight of motors

Code number and weight of motors (continued)

Code no.	Weight	
	kg	[lb]
151B3024	22.0	48.5
151B3025	22.5	49.6
151B3026	23.0	50.7
151B3027	24.0	52.9
151B3028	25.0	55.1
151B3029	26.0	57.3
151B3030	22.0	48.5
151B3031	22.5	49.6
151B3032	23.0	50.7
151B3033	24.0	52.9
151B3034	25.0	55.1
151B3035	26.0	57.3
151B3036	15.0	33.1
151B3037	15.5	34.2
151B3038	16.0	35.3
151B3039	17.0	37.5
151B3040	18.0	39.7
151B3041	19.0	41.9
151B3100	31.8	70.1
151B3101	32.6	71.9
151B3102	33.5	73.9
151B3103	34.9	76.9
151B3104	36.5	80.5
151B3105	31.8	70.1
151B3106	32.6	71.9
151B3107	33.5	73.9
151B3108	34.9	76.9
151B3109	36.5	80.5
151B3110	31.8	70.1
151B3111	32.6	71.9
151B3112	33.5	73.9
151B3113	34.9	76.9
151B3114	36.5	80.5
151B3115	32.6	71.9
151B3116	33.5	73.9
151B3117	34.9	76.9
151B3118	36.5	80.5
151B3119	37.1	81.8
151B3120	32.6	71.9
151B3121	33.5	73.9

Weight of motors

Code number and weight of motors (continued)

Code no.	Weight	
	kg	lb
151B3121	34.1	75.2
151B3123	35.5	78.3
151B3124	37.1	81.8
151B3125	22.7	50.1
151B3126	23.5	51.8
151B3127	24.4	53.8
151B3128	25.6	56.4
151B3129	27.7	61.1
151B3200	31.0	68.3
151B3201	31.5	69.4
151B3202	32.0	70.5
151B3203	33.0	72.8
151B3204	34.0	75.0
151B3205	35.0	77.2
151B3207	37.0	81.3
151B3208	31.5	69.4
151B3209	32.0	70.5
151B3210	33.0	72.8
151B3211	34.0	75.0
151B3212	35.0	77.2
151B4000	24.5	54.0
151B4001	25.0	55.1
151B4002	25.5	56.2
151B4003	26.5	58.4
151B4004	27.5	60.6
151B4005	28.5	62.8
151B4007	24.5	54.0
151B4008	25.0	55.1
151B4009	25.5	56.2
151B4010	26.5	58.4
151B4011	27.5	60.6
151B4012	28.5	62.8
151B4021	24.5	54.0
151B4022	25.0	55.1
151B4023	25.5	56.2
151B4024	26.5	58.4
151B4025	27.5	60.6
151B4026	28.5	62.8
151B4028	24.5	54.0
151B4029	25.0	55.1

Weight of motors

Code number and weight of motors (continued)

Code no.	Weight	
	kg	[lb]
151B4030	25.5	56.2
151B4031	26.5	58.4
151B4032	27.5	60.6
151B4033	28.5	62.8
151F0500	9.8	21.6
151F0501	10.0	22.1
151F0502	10.3	22.7
151F0503	10.7	23.6
151F0504	11.1	24.5
151F0505	11.6	25.6
151F0506	12.3	27.1
151F0507	9.8	21.6
151F0508	10.0	22.1
151F0509	10.3	22.7
151F0510	10.7	23.6
151F0511	11.1	24.5
151F0512	11.6	25.6
151F0513	12.3	27.1
151F0514	9.8	21.6
151F0515	10.0	22.1
151F0516	10.3	22.7
151F0517	10.7	23.6
151F0518	11.1	24.5
151F0519	11.6	25.6
151F0520	12.3	27.1
151F0521	10.3	22.7
151F0522	10.5	23.1
151F0523	10.8	23.8
151F0524	11.2	24.7
151F0525	11.6	25.6
151F0526	12.1	26.7
151F0527	12.8	28.2
151F0528	10.3	22.7
151F0529	10.5	23.1
151F0530	10.8	23.8
151F0531	11.2	24.7
151F0532	11.6	25.6
151F0533	12.1	26.7
151F0534	12.8	28.2
151F0535	7.8	17.3

Weight of motors

Code number and weight of motors (continued)

Code no.	Weight	
	kg	lb
151F0536	8.0	17.6
151F0537	8.3	18.3
151F0538	8.7	19.2
151F0539	9.1	20.1
151F0540	9.6	21.2
151F0541	10.3	22.3
151F0542	10.2	22.5
151F0543	10.4	22.9
151F0544	10.7	23.6
151F0545	11.1	24.5
151F0546	11.5	25.4
151F0547	12.0	26.5
151F0548	12.7	28.0
151F0560	9.8	21.6
151F0561	10.0	22.1
151F0562	10.3	22.3
151F0563	10.7	23.6
151F0564	11.1	24.5
151F0565	11.6	25.6
151F0566	12.3	27.1
151F0605	13.1	29.9
151F0608	11.1	24.5
151F0609	13.6	30.0
151F0610	13.6	30.0
151F2200	9.8	21.6
151F2201	10.0	22.1
151F2202	10.3	22.3
151F2203	10.7	23.6
151F2204	11.1	24.5
151F2205	11.6	25.6
151F2206	12.3	27.1
151F2207	9.8	21.6
151F2208	10.0	22.1
151F2209	10.3	22.3
151F2210	10.7	23.6
151F2211	11.1	24.5
151F2212	11.6	25.6
151F2213	12.3	27.1
151F2214	9.8	21.6
151F2215	10.0	22.1

Weight of motors

Code number and weight of motors (continued)

Code no.	Weight	
	kg	[lb]
151F2216	10.3	22.7
151F2217	10.7	23.6
151F2218	11.1	24.5
151F2219	11.6	25.6
151F2220	12.3	27.1
151F2235	10.3	22.7
151F2236	10.5	23.1
151F2237	10.8	23.8
151F2238	11.2	24.7
151F2239	11.6	25.6
151F2240	12.1	26.7
151F2241	12.8	28.2
151F2242	10.3	22.7
151F2243	10.5	23.1
151F2244	10.8	23.8
151F2245	11.2	24.7
151F2246	11.6	25.6
151F2247	12.1	26.7
151F2248	12.8	28.2
151F2261	13.1	29.9
151F2262	13.1	29.9
151F2263	13.6	30.0
151F2264	13.1	29.9
151F2265	13.6	30.0
151F2300	9.8	21.6
151F2301	10.0	22.1
151F2302	10.3	22.7
151F2303	10.7	23.6
151F2304	11.1	24.5
151F2305	11.6	25.6
151F2306	12.3	27.1
151F2307	13.1	29.9
151F2308	9.8	21.6
151F2309	10.0	22.1
151F2310	10.3	22.7
151F2311	10.7	23.6
151F2312	11.1	24.5
151F2313	11.6	25.6
151F2314	12.3	27.1
151F2315	13.1	29.9

Weight of motors

Code number and weight of motors (continued)

Code no.	Weight	
	kg	lb
151F2316	9.8	21.6
151F2317	10.0	22.1
151F2318	10.3	22.7
151F2319	10.7	23.6
151F2320	11.1	24.5
151F2321	11.6	25.6
151F2322	12.3	27.1
151F2323	13.1	28.9
151F2324	9.8	21.6
151F2325	10.0	22.1
151F2326	10.3	22.7
151F2327	10.7	23.6
151F2328	11.1	24.5
151F2329	11.6	25.6
151F2330	12.3	27.1
151F2331	13.1	28.9
151F2332	9.8	21.6
151F2333	10.0	22.1
151F2334	10.3	22.7
151F2335	10.7	23.6
151F2336	11.1	24.5
151F2337	11.6	25.6
151F2338	12.3	27.1
151F2339	13.1	28.9
151F2345	14.0	30.9
151F2346	14.0	30.9
151F2347	14.0	30.9
151F2348	14.0	30.9
151F2349	14.0	30.9
151F2350	9.8	21.6
151F2351	10.0	22.1
151F2352	10.3	22.7
151F2353	10.7	23.6
151F2354	11.1	24.5
151F2355	11.6	25.6
151F2356	12.3	27.1
151F2357	13.1	28.9
151F2358	14.0	30.9
151F2359	9.8	21.6
151F2360	10.0	22.1

Weight of motors

Code number and weight of motors (continued)

Code no.	Weight	
	kg	[lb]
151F2361	10.3	22.7
151F2362	10.7	23.6
151F2363	11.1	24.5
151F2364	11.6	25.6
151F2365	12.3	27.1
151F2366	13.1	28.9
151F2367	14.0	30.9
151F2368	9.8	21.6
151F2369	10.0	22.1
151F2370	10.3	22.7
151F2371	10.7	23.6
151F2372	11.1	24.5
151F2373	11.6	25.6
151F2374	12.3	27.1
151F2375	13.1	28.9
151F2376	14.0	30.9
151F2395	9.8	21.6
151F2396	10.0	22.1
151F2397	10.3	22.7
151F2398	10.7	23.6
151F2399	11.1	24.5
151F2400	11.6	25.6
151F2401	12.3	27.1
151F2402	13.1	28.9
151F2403	14.0	30.9
151F2413	9.8	21.6
151F2414	10.0	22.1
151F2415	10.3	22.7
151F2416	10.7	23.6
151F2417	11.1	24.5



Products we offer:

- Bent Axis Motors
- Closed Circuit Axial Piston Pumps and Motors
- Displays
- Electrohydraulic Power Steering
- Electrohydraulics
- Hydraulic Power Steering
- Integrated Systems
- Joysticks and Control Handles
- Microcontrollers and Software
- Open Circuit Axial Piston Pumps
- Orbital Motors
- PLUS+™ GUIDE
- Proportional Valves
- Sensors
- Steering
- Transit Mixer Drives

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electronic components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market. Building on our extensive application expertise, we work closely with our customers to ensure exceptional performance for a broad range of off-highway vehicles.

We help OEMs around the world speed up system development, reduce costs and bring vehicles to market faster.

Danfoss – Your Strongest Partner in Mobile Hydraulics

Go to www.powersolutions.danfoss.com for further product information.

Wherever off-highway vehicles are at work, so is Danfoss. We offer expert worldwide support for our customers, ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide comprehensive global service for all of our components.

Please contact the Danfoss Power Solution representative nearest you.

Comatrol

www.comatrol.com

Schwarzmueller-Inverter

www.schwarzmueller-inverter.com

Turolla

www.turollaocg.com

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Total address:

Danfoss
Power Solutions (US) Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 8000

Danfoss
Power Solutions GmbH & Co. OHG
Kronenstrasse 33
D-24143 Neumünster, Germany
Phone: +49 4931 671 0

Danfoss
Power Solutions A/S
Nordborgvej 1B
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

Danfoss
Power Solutions Trading
15 Shanghai Co., Ltd
Building #22, No. 1000 Jin He Jie
Jin Qiao, Pudong, New District
Shanghai, China 201200
Phone: +86 21 3418 5200

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without changes being necessary in specifications already agreed.

All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.